sales@clalighting.com.au
Tel: 02 9938 7100 | Fax: 02 9938 7115






MESTOLO1
(Aged Brass)


MESTOLO2
(Matte Black Aluminium)

MESTOLO

Exterior LED Garden Spike Lights IP65

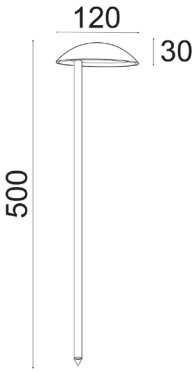

- Input voltage: 12-14V AC/DC
- External control gear required
- Material: weathered solid brass / powder coated aluminium
- Spike material: brass / aluminium
- Flex: 1000mm
- LED chips: 9pcs 2835
- Power factor: 0.98
- CRI: 80
- Ambient temperature: -40 to 85^{0}C
- Suitable for use with PIR or Microwave sensor
- Suitable for 2 way switching



Tested & Recommended Control Gear:

OTTER1 / OTTER2 / OTTER3 / OTTER4 / OTTER5 / OTTTER6 / OTTER7 / OTTER8 / ETH50.302VA

When calculating quantity of lamps to be used per driver / transformer:
Minimum Load: 10% of rated power;
Maximum Load: 80% of rated power.

Part No.	Description	Colour	Material	Kelvin	Lumens	Watt	Box Weight	Box Size	Carton Qty
MESTOLO1	SPIKE LED Fixed Aged Brass 12V AC/DC L500mm Anti Glare	Aged Brass	Solid Brass	3000K	400lm	5W	0.9kg	13x13x51cm	1/10
MESTOLO2	SPIKE LED Fixed Black (Aluminium) 12V AC/DC L500mm Anti Glare	Matte Black	Alumin-ium	3000K	400lm	5W	0.5kg	13x13x51cm	1/10

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box).
*To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector.