

EXTERIOR LED BOLLARD LIGHTS





PRODUCT FEATURES

- Input voltage: 12-14V AC/DC 50/60Hz
- Nominal current: 150mA
- Recommended CLA drivers: DRIV1/ OTTER1/ CLA111011/ CLA113011/ CLA115011/ CLA1115011
- Wattage: 6W
- Material: 316 stainless steel or solid copper
- PORTUS1SP spike material: brass
- 12pcs Sanán 2835 LED chips
- Cable length: 47mm
- Ambient temp: -40 to +85°C
- CRI: 75

| | | | |
|------------------------------|--------------|---------------|-----------------------------------|
| LIFE TIME 40,000 HOURS | BEAM 120° | IP67 RATED | WARRANTY 2YEARS REPLACEMENT |
|------------------------------|--------------|---------------|-----------------------------------|

Recommended Driver

| Recommended Driver | PCS per driver |
|--------------------|----------------|
| DRIV1 | 1PC |
| OTTER1 | 1PC |
| CLA111011 | 1PC |
| CLA113011 | 2-4PCS |
| CLA115011 | 4-7PCS |
| CLA1110011 | 10-14PCS |
| CLA1115011 | 14-20PCS |

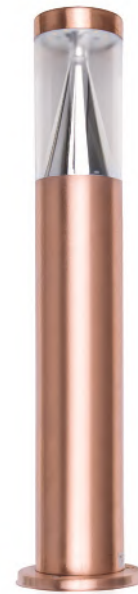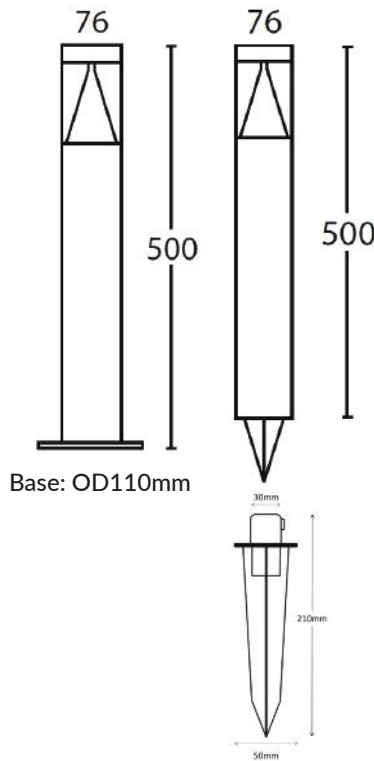

PORTUS1FLC



PORTUS1FSS



PORTUS1SPC



PORTUS1SPSS

Brass Spike

| CODE | DESCRIPTION | TECHNICAL DATA | | | | PACKAGING DETAILS | | |
|-------------|---|--------------------------------|--------|--------|------|-------------------|----------|------------|
| | | COLOUR | KELVIN | LUMENS | WATT | WEIGHT (KG) | BOX (CM) | CARTON QTY |
| PORTUS1FLC | BOLLARD LED 12V COP Anti Glare L500mm with Flange | Polishing copper | 3000K | 620LM | 6 | 1.6 | 11x11x50 | 10 |
| PORTUS1FLSS | BOLLARD LED 12V SS316 Anti Glare L500mm with Flange | Stainless steel clear anodized | 3000K | 620LM | 6 | 1.4 | 11x11x50 | 10 |
| PORTUS1SPC | SPIKE LED 12V COP Anti Glare | Polishing copper | 3000K | 620LM | 6 | 1.9 | 11x11x50 | 10 |
| PORTUS1SPSS | SPIKE LED 12V SS316 Anti Glare | Stainless steel clear anodized | 3000K | 620LM | 6 | 1.7 | 11x11x50 | 10 |

UPDATED ON 09.02.2018

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting