



Product	Page	Product	Page
Interior			
Downlights		Globes	
Handy-8	10	LED Filament Series	50
Hasty-8	11	LED Filament Series	51
Boost-10	12	LED Filament Series	52
Bliss-10	13	LED Filament Series	53
Deco Series	14	LED Filament Series	54
Deco Series	16	LED Retro Vintage Filament Series	55
Deco Series	17	LED Retro Vintage Filament Series	56
Deco Series	18	LED Retro Vintage Filament Series	57
Tek Series	19	LED Retro Vintage Filament Series	58
Aqua Series	20	LED Retro Vintage Filament Series	59
Aqua Series	21	Key GLS 12V	60
Cell Series	22	K <sub>ey</sub> GLS TRIO	61
Cell Series	23	Key MR16 & GU10 Glass	62
Cell Frames	26	Key MR16 & GU10 TRIO	63
Deep Series	28	Key T40 TRIO	64
Deep Series	30	Key-PAR Series	65
Scoop Series	31	Astra Series	66
Expo Series	32	<b>Profiles</b>	
Expo Series	33	Bloc-20	69
Neo Pro Recessed Series	34	Curve 20	70
Neo Pro Recessed Series	35	Corner 16 RND	71
Moon Recessed Series	36	Nova 17 SM	72
Moon Recessed Series	37	Nova 17 REC	73
Pico Series	38	Nova 24 SM	74
Pico Series	39	Nova 24 REC	75
Moon Surface Mounted Series	40	Omega 35 SM	76
Moon Surface Mounted Series	41	Bloc 42	77
Neo Pro Surface Mounted Series	42	Omega 35 REC	78
Neo Pro Surface Mounted Series	43	Strip	
Neo Surface Mounted Tilt Series	45	Plex 7.2	80
Neo Surface Mounted Tilt Series	46	Plex 14.4	81
Slotter Series	47	Plex 19.2	82





# Table of Contents

Product	Page	Product	Page	Product	Page	Product	Page
Plex 19.2 RGBWW	83	LED Panels		Diana	160	Pipe-60 Series	202
Plex 7.2 IP66	84	Panel Backlit Series	128	Erin	161	Table & Desk Lamps	
Plex14.4 IP66	85	LED Panel Recessed Plaster Frames	130	Alexa	161	Strap Series	204
Plex 19.2 IP66	86	LED Panel Surface Mount Frames	130	Jazz Series	162	Allegra Series	205
Plex 19.2 IP66 RGBWW	87	LED Panel Surface Mount Frames Installati	on Guide 131	Evelyn Series	164	Forge	206
Pleo 14.4	88	LED Panel Wire Suspension Kit	131	Ashley	166	Sands	207
Pleo 14.4S	89	LED Directional Lights		Riley 450	167	Ashley Series	208
LED Controllers		Pistol Series	134	Moon Series	168	Giana Series	209
CHAM-BT-RF-5C	92	Pistol Series	135	Moon Series	169	Sandra Series	210
CHAM-REM-3C	94	LED Track Lights		Star Series	170	Ashley	211
CHAM-REM-1C	95	Moon Series	136	Luna Series	172	Leah Series	212
CHAM-TOUCH-3C	96	Moon Series	137	Zoey Series	174	Marisol	213
CHAM-TOUCH-1C	97	Moon Series	138	Laya Series	175	Rustica	214
CHAM-DR-4C	98	Moon Series	139	Ruby Series	176	Tinley Series	215
CHAM-DR-1C	99	Thor Series	140	Jade-220 Series	178	Floor Lamps	
CHAM-DIM-DALI-4C	100	Thor Series	141	Jade-240 Series	180	Strap Series	216
CHAM-DIM-DALI-1C	101	Trak-3 Series	144	Melody Series	182	Allegra Series	217
CHAM-DIM-DMX	103	Trak-3 Accessories	145	Nova Series	184	Forge	218
Max-50-DN	104	Pendants		LED Crystal Pendants		Ashley	219
Max-50-REC	106	Allegra Series	146	Jupiter Series	186	Eden Series	220
Max-50-SM	108	Forge Series	147	Boomerang Series	188	Elsa Series	221
Max-50-UD	110	Strap Series	147	Everest Series	189	Leah Series	222
Max-75-DN	112	Spin	148	Raindrop Series	190	Marisol	223
Max-75-REC	114	Madera Series	149	Snowdrop Series	191	Rustica	224
Max-75-SM	116	Felix Series	150	Arctic Series	192	Tinley Series	225
Max-75-UD	118	Hoist Series	151	Starlight Series	193	Bedside Light	
LED Oysters		Bubble	152	Starlight Series	194	Charge-01 Series	226
Gear 350	120	Flaunt Series	153	Starlight Series	195	Charge-02 Series	227
Swirl 450	121	Sands	154	Rainbow Series	196	LED Wall Lights	
Mondo Round Series	122	Sail Series	155	Venus Series	197	Lumaline-2 Series	228
Solar Round Series	123	Alice Series	156	LED Linear Pendants		Shadowline Series	229
Solar Square Series	124	Eva Series	157	Max-35 Series	198	Strap Series	230
Easy Series	125	Maya Series	158	Max-50-DN Series	200	Glow 8 Series	231
Sunset Series	126	Chelsea Series	159	Bloc-42 Series	201	Moon Series	232







# Table of Contents

Product	Page	Product	Page	Product	Page	Product	Page
Moon Series	233	BF-8259	254	Dash Series	284	LED Deck Lights	
Sinta Series	234	BF-8276	254	Sierra Series	286	Vivid Series	318
Deens 8	235	BF-8411	255	Bell Series	288	Single Colour 5 Pack Kit	318
Vanity Lights		BF-8418	255	Block Series	290	RGB Colour 5 Pack Kit	318
Mirror Series	236	LED Step Lights		Edge Series	291	Single Head	319
Mirror Series	238	Camino Series	256	Kira Series	292	Single Colour Dimming Controller	319
HL-804 Series	239	Camino Series	257	Casa Series	293	LED Inground Lights	
Ceramic Lights		LED Battens		Claro Series	294	Deka Series	320
BF-2012	240	Bolt Series	258	Como Series	295	Magneto Series	323
BF-2013	240	Bolt Emergency Series	259	Cuba Series	296	Magneto Series	324
BF-2014	241	Exterior		Halo Series	297	Magneto Series	325
BF-2018	241			York Series	299	Modula Series	326
BF-2019	242	LED Battens	0/0	LED Step Lights		LED Bunkers Lights	
BF-2020	242	Hydro Series	260	Zone Series	300	Versa Series	327
BF-2185	243	Hydro Emergency Series	261	Zac Series	302	Polycarbonate Lights	
BF-2350	243	LED Wall Lights		Zac Series	304	Polyring Oval Series	328
BF-2440	244	Shadow Series	262	Zeke-9 Series	306	Polyring Oval Large Series	329
BF-2601A	244	Shadow Series	264	Zeke-4 Series	307	Polyring Round Series	330
BF-2601B	245	LED Spotlights		Zeke-8 Series	308	Polydome Series	331
BF-2607A	245	Shadow Series	266	You Series	309	Polyslim-270 Series	332
BF-2607B	246	Shadow Series	268	LED Spotlights		Polywall Series	333
BF-2608A	246	LED Wall Lights		Elite Adjustable	310	Polymount Series	334
BF-7577	247	Finn-8 Series	270	LED Security Lights		Polysphere Series	335
BF-7578	247	Zelda-18 Series	271	Muro-Pro Series	311	Post Light Accessories	
BF-2608B	248	Halo Series	272	Muro-Pro Series	312	60mm Aluminium Post Series	336
BF-7310	248	Livi Series	273	LED Floodlights		76mm Aluminium Post Series	337
BF-7603	250	Miley 10 Series	274	Flash-20 Series	313	Bollard Lights	
BF-7908	250	Alpha Series	275	Garden Lights	0.0	BL-100	338
3F-7949	251	Piper 1 Series	276	Zoom Series	314	BL-100-1M-KIT	339
BF-8042	251	Piper 1 Series	277	Kira Spike	315	BL-200	340
3F-8235	252	Piper 2 Series	278	Кіта Зріке Elite Spike	316	BL-200-1M-KIT	341
BF-8258	252	Piper 2 Series	279	Shadow Series	316	BL-300	342
3F-8284	253	Mojo Series	280	Shadow Series	317	BL-300-1M-KIT	343
BF-8286	253	Whisper Series	282	Jiiddow Jeiles	31/		



5



Product	Page
Traditional Exterior	
Monaco Series	344
Lisbon Series	350
Siena Series	357
Vienna	363
Vienna Large Series	371
Chester Series	375
Chester Large Series	383
Paris Series	387
Avignon Series	393
Turin Series	399
Turin Large Series	405
Accessories	409
LED Drivers	
WP-12V Series	412
WP-24V Series	414
WP-350mA Series	416
WP-700mA Series	416



## **IP Rating Chart**

The Ingress Protection Rating consists of the letters IP followed by two digits. The first digit refers to the protection against the ingress of solids particles and the second digit to the protection against the ingress of liquids.



IP	Effective Against	Description
0	-	No protection against contact and ingress of objects
1	≥50mm	Any large surface of the body, such as the back of a hand, but no protection against deliberate contact with a body part.
2	>12.5mm	Fingers or similar objects
3	>2.5mm	Tools, thick wires, etc.
4	>1mm	Most wires, slender screws, large ants etc.
5	Dust Protected	Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the safe operation of the equipment.
6	Dust-Tight	No ingress of dust; complete protection against contact (dust-tight). A vacuum must be applied. Test duration of up to 8 hours based on airflow.

IP	Effective Against	Description
0	None	
1	Dripping Water	Dripping water (vertically falling drops) shall have no unsafe effect on the specimen when mounted in an upright position onto a turntable and rotated at 1RPM.
2	Dripping water when tilted at 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle of 15° from its normal position. A total of four positions are tested within two axes.
3	Spraying water	Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect, utilizing either: a) an oscillating fixture, or b) A spray nozzle with a counterbalanced shield.
4	Splashing of water	Water splashing against the enclosure from any direction shall have no harmful effect, utilizing either:  a) an oscillating fixture, or b) A spray nozzle with no shield.
5	Water jets	Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects.
6	Powerful water jets	Water projected in powerful jets (12.5 mm) against the enclosure from any direction shall have no harmful effects.
6K	Powerful water jets with increased pressure	Water projected in powerful jets (6.3 mm nozzle) against the enclosure from any direction, under elevated pressure, shall have no harmful effects.
7	Immersion, up to 1 meter (3 ft 3 in) depth	Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 meter of submersion).
8	Immersion, 1 meter (3 ft 3 in) or more depth	The equipment is suitable for continuous immersion in water under conditions which shall be specified by the manufacturer. However, with certain types of equipment, it can mean that water can enter but only in such a manner that it produces no harmful effects. The test depth and duration is expected to be greater than the requirements for IPx7, and other environmental effects may be added, such as temperature cycling before immersion.
9K	Powerful high-temperature water jets	Protected against close-range high pressure, high-temperature spray downs. Smaller specimens rotate slowly on a turntable, from 4 specific angles. Larger specimens are mounted in the intended position when being used, no turntable required, and are tested freehand for at least 3 minutes at a distance of 0.15–0.2 meters.



With over 60 years heritage of manufacturing and distribution of lighting products for the Australasian market, Domus Lighting has developed a highly regarded reputation for innovation, quality and reliability. We are focused on continuing that reputation by investing in energy efficient lighting products, using the latest lighting technologies. Domus, was formed in 1961 in response to a growing need for quality lighting products. Now, Domus Lighting has expanded to become one of Australia's leading distributors of LED lighting to the Electrical Wholesale and Lighting Retail distribution channels.

Proudly 100% Australian owned, the company operates from a modern 13,000m<sup>2</sup> distribution facility and head office. Domus Lighting also offers a custom made lighting service to help provide a solution to those exciting and challenging designs. Our team are committed to applying their unrivalled LED experience and lighting expertise to enhance any of your energy saving lighting requirements. Combining that capability with the strength of our sales force, you can count on us to support you for all your lighting needs.

# **Multi Colour LED's**

#### **Dip Switch Technology**

Multi-colour LED's are products that can produce up to 5 different colour temperatures, thoughout the Domus catalogue you'll find products that have this function.

This is the breakdown of the available options:

XWW= 2700K | WW= 3000K | NW= 4000K W= 5000K | XW= 5700K















## Handy-8

Anti-glare frame. Polyamide frame and heat sink. Fully dimmable with suitable dimmers.













### Hasty-8

Flat face frame. Polyamide frame and heat sink. Fully dimmable with suitable dimmers.




















domuslighting.com.au



/ / /	30	0	333				
	Variants					Lumen Output	
Item No.	White	CCT	Wattage	IP Rating	Warm White	Neutral White	White
	vvnite				3000K	4000K	5700K
HANDY-8	20820	TRIO	8W	54	680lm	740lm	800lm



Item No.	Variants				Lumen Output				
	White	CCT	Wattage	IP Rating	Warm White	Neutral White	White		
					3000K	4000K	5700K		
HASTY-8	20821	TRIO	W8	54	680lm	740lm	800lm		

TRIO Technology dip switch

## LED Downlights



#### Boost-10

- Anti-glare frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.



12














Cutout: Ø90mm

	Variants					Lumen Output			
Item No.	Blk	Wht	CCT	Wattage	IP Rating	Warm White 3000K	Neutral White 4000K	White 5700K	
BOOST-10	20727	20726	TRIO	10W	54	750lm	780lm	800lm	



## LED Downlights



#### Bliss-10

- Flat face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.






domuslighting.com.au









Cutout: Ø90mm

	Vari	ants				Lumen Output			
Item No.	Blk	Wht	CCT	Wattage	IP Rating	Warm White	Neutral White	White	
						3000K	4000K	5700K	
BLISS-10	20707	20706	TRIO	10W	54	750lm	780lm	800lm	



# LED Downlights



#### Deco Series

- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.











DECO-8-RND

DECO-13-RND










domuslighting.com.au





Cutout: Ø70-75mm

Cutout: Ø90mm

	Variants					CCT	Lumen Output			
Item No.	Blk	Alu	Wht	Wattage	IP Rating	CCT	Warm White 3000K	Neutral White 4000K	White 5700K	
DECO-8	20411	20412	20410							
		DALI			44	TRIO	700lm	750lm	800lm	
	21586	21587	21585							
DECO-13-RND	20421	20422	20420							
	DALI			13W	44	TRIO	800lm	850lm	900lm	
	21589	21590	21588							

**DOMUS**°





- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.












DECO-13T



DECO-13-SQR







Cutout: Ø90mm

16





Cutout: Ø95mm

	Variants						Lumen Output			
Item No.	Blk	Alu	Wht	Wattage	IP Rating	CCT	Warm White 3000K	Neutral White 4000K	White 5700K	
DECO-13-SQR	20528	20427	20425		44	TRIO	800lm	850lm	900lm	
		DALI		13W						
	21592	21593	21591							
	21045	N/A	20430			TRIO	800lm	850lm	900lm	
DECO-13-TILT		DALI		13W	44					
	21668	N/A	21667							

#### **Deco Series**

- · Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.














41.5mm Ø153mm Ø190mm

Cutout: Ø160 - Ø170mm





Cutout: Ø200 - Ø210mm

	Vari	ants				Lumen Output			
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White 3000K	Neutral White 4000K	White 5700K	
DECO 20	20433	20432		44	TRIO	1700lm			
DECO-20	DA	ALI	20W				1750lm	1800lm	
	21595	21594							
	20435	20434							
DECO-28	DA	ALI	28W	44	TRIO	2300lm	2350lm	2400lm	
	21597	21596							

**DOMUS**°

#### Deco Series

- 140mm Adaptor plate to suit Deco-13 (Fixed version only).
- Cast Aluminium, powder coated.
- Ideal for covering larger holes from Ø100-130mm.





		2
4	Ø140mm	<b>*</b>

 $V_{ariants}$ Item No. Wht DECO-ADAP 20507 20504



Ø92.8mm

#### **Tek Series**

• Flat face frame.

3yr

- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.





LED Downlights










TEK-13





Ø90mm Cutout



	Variants						Lumen Output			
Item No.	Blk	Schr	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	DIK	Schr					3000K	4000K	5700K	
	20621	20445	20443							
TEK-13		DALI		13W	44	TRIO	800lm	850lm	900lm	
	21599	21600	21598							





#### **Aqua Series**

- · COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas, IP65\*.
- DALI option now available, production lead times apply.



















AQUA-13-BLK





Cutout: Ø90-95mm

		Vari	ants					Lumen Output			
Item No.	Stan	dard	DA	\LI	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Blk	Wht	Blk	Wht				3000K	4000K	5700K	
AQUA-10	21270	21271	21287	21288	10W	65*	TRIO	870lm	980lm	930lm	
AQUA-13	21272	21273	21289	21290	13W	65*	TRIO	1130lm	1300lm	1220lm	

\*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.

**DOMUS** 



## LED Downlights

g 60°

whaterproof.



#### **Aqua Series**

- · COB LED Chip.
- · Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas, IP65\*.
- DALI option now available, production lead times apply.

Cutout: Ø90-95mm



		Vari	ants					Lumen Output			
Item No.	Standard		DALI		Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Blk	Wht	Blk	Wht				3000K	4000K	5700K	
AQUA-13-TILT	21274	21278	21291	21292	13W	65*	TRIO	1130lm	1300lm	1220lm	

\*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.



21

- · COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.
- A replaceable solution to re-lamp when used with compatible frames.



















1 1	Vari	ants	ID D		CC	T - Lumen Out	put	
Item No.	Standard	DALI	IP Rating	2700K	3000K	4000K	5000K	5700K
	26980	21637	44			60°		
	20700	21037	44	649lm	660lm	717lm	755lm	772lm
	26981	21638	44			36°		
CELL-9-5CCT	20701	21030	44	640lm	651lm	738lm	749lm	766lm
CLLL-7-JCC1	26982	21639	44			24°		
	20702	21037	44	681lm	688lm	748lm	788lm	807lm
	26983	21640	44			15°		
	20703	21040		656lm	662lm	717lm	757lm	772lm
						T		
Item No.	Variants		IP Rating			T - Lumen Out		
1101111101	Standard	DALI		2700K	3000K	4000K	5000K	5700K
	26984	21641	44			60°		
	20704	21041	77	1002lm	995lm	1098lm	1163lm	1145lm
	26985	21642	44			36°		
CELL-13-5CCT	20703	21042	44	990lm	1000lm	1077lm	1120lm	1137lm
CLLE-ID-JCCI	26086	21643	44			24°		
	26986 2	21043	44	1037lm	1030lm	1108lm	1154lm	1175lm
	26987 21644	216/1/1	/1/1			15°		
		44	965lm	975lm	1050lm	1092lm	1160lm	

**DOMUS** 

#### Cell Series










- · COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.
- A replaceable solution to re-lamp when used with compatible frames.





	1.7	147	ID D	COT		D 4 1	
Item No.	Variants	Wattage	IP Rating	CCT	Lumen Output	Beam Angle	A
	27032					60°	AND PERSONAL PROPERTY.
CELL-17	27033	17W	44	2700K	1500lm	36°	
CELL-1/	27034	17 44	44	2700K	IJOOtim	24°	
	27035					15°	Marie Control
	27036					60°	Addis Vol.
CELL 17	27037	47047	dd	3000K	1550lm	36°	NO STATE OF THE PARTY OF THE PA
;	27038	17W	44			24°	A CONTRACTOR OF THE PARTY OF TH
	27039					15°	
	27040	470.4		10001	44.501	60°	
CELL 17	27041		dd			36°	
CELL-17	27042	17W	44	4000K	1650lm	24°	
	27043					15°	
	27044					60°	
CELL 17	27045	17W	111	FOOOK	17001	36°	
CELL-1/	27046		44	5000K	1700lm	24°	
	27047					15°	



## LED Module Downlights

#### Choose a module









17W

#### Choose a frame

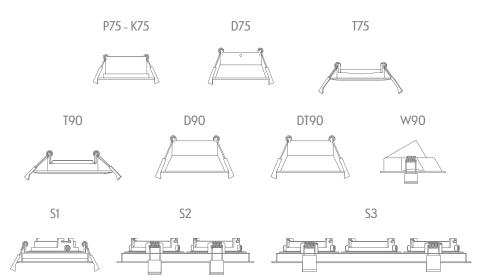


#### Press down firmly until module clicks into frame.




#### Multiple Combinations

#### CELL-K75 & P75




Cutout: Ø70-75mm

CELL-D75




Cutout:Ø75-77mm

CELL-T75




Cutout: Ø72-75mm Tiltable to 15°

CELL-D90 & DT90




Cutout:Ø90-92mm DT90 Tiltable to 15°

CELL-T90




Cutout: Ø85-90mm Tiltable to 15o

CELL-W90




Cutout: Ø88-90mm W90 wall washer frame is set at a  $45^{\circ}$  angle.

CELL-S1




Cutout: L100mm x W100mm

CELL-S2



Cutout: L190mm x W100mm



CELL-S3

Cutout: L280mm x W100mm





domuslighting.com.au







## LED Module Downlights



CELL-P75



CELL-K75



CELL-T75



CELL-D75



CELL-W90



CELL-T90



CELL-DT90



CELL-D90



CELL-S1



CELL-S2



CELL-S3



domuslighting.com.au







## Deep Series

- SMD LED Chip.
- Anti-glare deep-set frame.
- Polyamide frame, Cast Aluminium heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.














DEEP-9-WHT



Cutout: Ø88-Ø90mm



tem No.	Vari	ants				Lumen Output			
	Standard	DALI	CCT	Wattage	IP Rating		Neutral White		
		DALI				3000K	4000K	5000K	
DEEP-9	20815	20816	TRIO	9W	54	785lm	920lm	865lm	





#### Deep Series

- · COB LED Chip.
- Anti-glare deep-set frame.
- Tiltable.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.



















DEEP-13-BLK





Cutout: ø75mm

Cutout: ø90mm

		Vari	ants					Lumen Output			
Item No.	Stan	dard	DA	\LI	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Blk	Wht	Blk	Wht				3000K	4000K	5700K	
DEEP-10	21729	21730	21733	21734	10W	40	TRIO	767lm	833lm	900m	
DEEP-13	21731	21732	21738	21736	13W	40	TRIO	987lm	1053lm	1120lm	

**DOMUS** 

#### Scoop Series

- · COB LED Chip.
- · Adjustable and Directional.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.



















SCOOP-25-WHT







Cutout: Ø160mm - Ø170mm

		Vari	ants					Lumen Output			
Item No.	Standard		DALI		Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Blk	Wht	Blk	Wht				3000K	4000K	5000K	
SCOOP-13	20466	20468	20467	20469	13W	20	TRIO	780lm	880lm	870lm	
SCOOP-25	20470	20472	20471	20473	25W	20	TRIO	2010lm	2231lm	2230lm	



#### Expo Series

- · Anti-glare deep-set frame.
- Low UGR ≤ 19.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.



















EXPO-10











EXPO-25

32

-			ants					Lumen Output			
Item No.	Stan	Standard		DALI		IP Rating	CCT				
nem rvo.	Blk	Wht	Blk	Wht				Neutral White	ite White		
	DIK	vv nt	DIK					3000K	4000K	5700K	
EXPO-10	20710	20711	21602	21601	10W	44	TRIO	710lm	780lm	850lm	
EXPO-25	20712	20713	21604	21603	25W	44	TRIO	2200lm	2400lm	2600lm	




- · Anti-glare deep-set frame.
- Low UGR ≤ 19.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.





EXPO-35



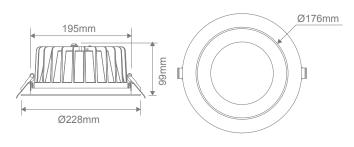

Cutout: Ø200-210mm

		Vari	ants						Lumen Output	
Item No.	Stan	Standard		\LI	Wattago	IP Rating	CCT	Lumen Output		
Item INo.	Blk \	Wht	Blk	Wht	vvattage	ii Ruttiig	CCI	Warm White	$N_{eutral}White$	White
	DIK	******	DIK	*******				3000K	4000K	5700K
EXPO-35	20714	20715	21606	21605	35W	44	TRIO	3650lm	3750lm	3850lm

**DOMUS**°

#### Neo Pro Recessed Series

- SMD LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Anti-glare deep set frame, frosted diffuser
- DALI option now available, production lead times apply.



LED Downlights











		Vari	ants					1 0		
ltem No.	Standard DA		ALI	Wattage	IP Rating	CCT	Lumen Output			
	Blk	Wht	Blk	Wht				3000K	4000K	5700K
NEO-PRO-13-REC	20915	20916	21608	21607	13W	65	TRIO	850lm	1000lm	900lm
NEO-PRO-25-REC	20917	20918	21610	21609	25W	65	TRIO	2250lm	2400lm	2300lm
NEO-PRO-35-REC	20919	20920	21612	21611	35W	65	TRIO	3200lm	3400lm	3300lm

**DOMUS**°


#### Neo Pro Recessed Series

- SMD LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.







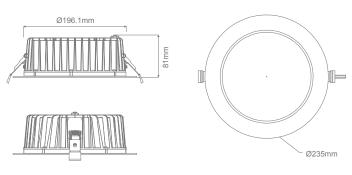

Cutout: Ø200-220mm

domuslighting.com.au





#### Moon Recessed Series

- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.



LED Downlights













MOON-REC-SPOT



Cutout: Ø110mm



MOON-REC-TUBE



Item No.	Vari	ants	\\/	ID	CCT	
Item INo.	Blk	Wht	Wattage	IP		
	FLD	22804	22805			
MOON-REC	OPAL	22806	22807	6/9W	20	TRIO
	SPOT	22808	22809	0/9 ٧٧	20	IRIO
	TUBE	22810	22811			


**DOMUS** 

Up to 45° tilt, 355° Rotation



MOON-REC-OPAL





Cutout: Ø110mm

123.3mm	Ø109.6mm 46.6mm
	<del>←</del> Ø86.5mm

Cutout: Ø110mm

	6W - Lumen Output											
	Warm Whi		Neutral Wh	ite 4000	OOK White 5700K							
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
477lm	433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm	
					9W - Lum	en Outpu	t					
	Warm Whi	ite 30001	<	J	Neutral Wh	ite 4000	K		White 5	5700K		
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
651lm	600lm	661lm	593lm	780lm	719lm	756lm	716lm	775lm	729lm	751lm	708lm	

- · Complete with driver.
- Cast Aluminium frame and heat sink.
- DALI option now available, production lead times apply.
















PICO-3-TILT-WHT





Cutout: Ø35mm Driver fits through cutout hole





Cutout: Ø45mm - Tilt: 20° Driver fits through cutout hole

domuslighting.com.au

		Vari	ants					Lumen Output			
Item No.	Stan	Standard		DALI		IP Rating	CCT	Lumen Output			
item 140.	Blk Wht		Blk	Wht	wattage	ir Kating	CCI	Warm White	$N_{eutral}White$	White	
	Dlk	Dlk VV ht	Dlk	vv ht				3000K	4000K	5700K	
PICO-3	21575	21576	21662	21661	3W	40	TRIO	180lm	210lm	210lm	
PICO-3-TILT	21577	21578	21664	21663	3W	40	TRIO	180lm	210lm	210lm	

#### Pico Series


- Complete with driver.
- Cast Aluminium frame and heat sink.
- DALI option now available, production lead times apply.
















		Vari	ants						Lumen Output	
Item No	Stand	Standard		DALI		IP Rating	CCT		Lumen Output	
	Blk Wht	\A/I	nt Blk	Wht	— Wattage	IF Rating	CCI	Warm White	$N_{eutral}White$	White
	DIK	v v ht	DIK	v v ht				3000K	4000K	5700K
PICO-7	21581	21582	21666	21665	7W	40	TRIO	390lm	470lm	460lm

**DOMUS**®





#### Moon Surface Mounted Series

- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.

LED Downlights

























MOON-SM-TUBE



MOON-SM-OPAL









Item No.	Variants Blk Wht		Wattage	IP	CCT	
MOON-SM	FLD OPAL	22812 22814			00	TDIO
	SPOT TUBE	22816 22818		6/9W	20	TRIO

**DOMUS** 





6W - Lumen Output											
Warm White 3000K					ite 4000	K	White 5700K				
Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm	
				9W - Lum	en Outpu	t					
Warm Whi	ite 30001	K		Neutral Wh	ite 4000	K		White 5	700K		
Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
600lm	661lm	593lm	780lm	719lm	756lm	716lm	775lm	729lm	751lm	708lm	
	Opal-130° 4331m Warm Whi Opal-130°	Opal-130°         Spot-30°           433lm         498lm           Warm White 3000         Opal-130°           Spot-30°         Spot-30°	Opal-130°         Spot-30°         Tube-60°           4331m         4981m         4301m           Warm White 3000 K         Opal-130°         Spot-30°         Tube-60°	Opal-130°         Spot-30°         Tube-60°         Fld-60°           433lm         498lm         430lm         556lm           Warm White 3000K           Opal-130°         Spot-30°         Tube-60°         Fld-60°	Warm White 3000K         Neutral Wh           Opal-130° Spot-30° Tube-60° Fld-60° Opal-130°         430lm         556lm         504lm           433lm         498lm         430lm         556lm         504lm           9W - Lum           Warm White 3000K         Neutral Wh           Opal-130° Spot-30° Tube-60° Fld-60° Opal-130°	Warm White 3000K         Neutral White 4000           Opal-130° Spot-30° Iube-60°         Fld-60°         Opal-130°         Spot-30°           433lm         498lm         430lm         556lm         504lm         534lm           9W - Lumen Outpu           Warm White 3000K         Neutral White 4000           Opal-130° Spot-30°         Tube-60°         Fld-60°         Opal-130°         Spot-30°	Warm White 3000K         Neutral White 4000K           Opal-130° Spot-30° Tube-60° Fld-60° Opal-130° Spot-30° Tube-60°           433lm         498lm         430lm         556lm         504lm         534lm         504lm           9W - Lumen Output           Warm White 3000K         Neutral White 4000K           Opal-130° Spot-30° Tube-60°         Fld-60° Opal-130° Spot-30° Tube-60°	Warm White 3000K       Neutral White 4000K         Opal-130° Spot-30° Tube-60°       Fld-60°       Opal-130° Spot-30° Tube-60°       Fld-60°         433lm       498lm       430lm       556lm       504lm       534lm       504lm       561lm         9W - Lumen Output         Warm White 3000K       Neutral White 4000K         Opal-130° Spot-30° Tube-60°       Fld-60°       Opal-130° Spot-30° Tube-60°       Fld-60°	Warm White 3000K         Neutral White 4000K         White 5         White 5           Opal-130° Spot-30° Tube-60°         Id-60°         Opal-130° Spot-30° Tube-60°         Id-60°         Opal-130°           433lm         498lm         430lm         556lm         504lm         534lm         504lm         561lm         513lm           9W - Lumen Output           Warm White 3000K         Neutral White 4000K         White 5           Opal-130° Spot-30° Tube-60°         Id-60°         Opal-130° Spot-30° Tube-60°         Id-60°         Opal-130°	Opal-130°         Spot-30°         Tube-60°         Fld-60°         Opal-130°         Spot-30°         Tube-60°         Fld-60°         Opal-130°         Spot-30°           433lm         498lm         430lm         556lm         504lm         534lm         504lm         561lm         513lm         536lm           9W - Lumen Output           Warm White 3000 K         Neutral White 4000 K         White 5700K           Opal-130°         Spot-30°         Tube-60°         Fld-60°         Opal-130°         Spot-30°         Fld-60°         Opal-130°         Spot-30°	

## Neo Pro Surface Mounted Series

- · SMD LED Chip.
- Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- Anti-glare deep set frame, frosted diffuser.
- DALI dimming (Remote Driver) optional extra upon request.























NEO-PRO-25-SM

Item No.	Variants		\A/	ID D	CCT	Lumen Output			
	Blk	Wht	Wattage	IP Rating	CCI	3000K	4000K	5700K	
NEO-PRO-13-SM	20890	20891	13W	65	TRIO	1000lm	1200lm	1100lm	
NEO-PRO-25-SM	20892	20893	25W	65	TRIO	2200lm	2400lm	2300lm	

**DOMUS**°





### Neo Pro Surface Mounted Series

- · SMD LED Chip.
- · Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- DALI dimming (inbuilt driver) optional extra upon request.

NEO-PRO-35-SM











Item No.	Vari	ants	\A/	ID D	CCT	Lumen Output			
	Blk	Wht	Wattage	IP Rating		3000K	4000K	5700K	
NEO-PRO-35-SM	20894	20895	35W	65	TRIO	3000lm	3200lm	3100lm	





# LED Downlights



## Neo Surface Mounted Tilt Series

- COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.
















NEO-SM-10-TILT



Item No.	Vari	ants					Lumen Output	
	DII	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White
	Blk	vv ht				3000K	4000K	5000K
NEO-10-SM-TILT	21294	21298	10W	20	TRIO	880lm	960lm	945lm

# \_\_\_\_\_

#### Neo Surface Mounted Tilt Series

- · COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.












NEO-SM-20-TILT



NEO-SM-20-TILT



	Variants					Lumen Output			
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White 3000K	Neutral White 4000K	White 5000K	
						3000K	4000K	JUUUK	
NEO-20-SM-TILT	21296	21297	20W	20	TRIO	1950lm	2030lm	1920lm	

**DOMUS** 



#### Slotter Series

- Die-cast Aluminium trim and pressed metal body.
- Compatible with most MR16 style LED lamps and modules (not included).
- Anti-glare deep-set frame.
- Directional.







DSL-101-2B



DSL-101-3B



DSL-101-4B





DSL-101-4SQR













Item No.	Variants	Cutout	Colour
DSL/1S	70001	102mm x	Silver Frame
מי /אכט	70002	110mm	White Frame
DSL/2B	70003	208mm x	Silver Frame
D2L/ ZD	70004	110mm	White Frame
DCL /OB	70005	308mm x	Silver Frame
DSL/3B	70006	110mm	White Frame
DCI /IID	70007	408mm x	Silver Frame
DSL/4B	70008	110mm	White Frame
DSI /IISO	70009	215mm x	Silver Frame
DSL/4SQ	70010	208mm	White Frame

















**LED Filament Series** 









LF-A60-CLR-E27




LF-A60-FRS-B22




LF-G95-CLR-E27




LF-G95-FRS-B22






domuslighting.com.au

Item No.	Vari	ants	Watt		- Watt CCT La		Lamp CRI		Lumen Output		Lifetime
	Clr	Frst	Clr	Frst	Equiv.	CCI	Base	CKI	Clr	Frst	Lifetime
	65932	65976				2700K	E27		1055lm	1055lm	
LF-A60	65933	65977	7.8W	8.5W	75W	6500K	EZ/	≥80	1050lm	1055lm	15,000h
LF-AOU	65930	65974	7.8W	0.5	/3//	2700K	Daa	200	1055lm	1055lm	13,000h
	65931	65975			6500K	B22		1050lm	1055lm		





Item No.	Vari	ants	W	att	Watt Equiv.	CCT	Lamp	CRI	Lumen	Output	Lifetime
	Clr	Frst	Clr	Frst	- Watt Equiv.	CCI	Base	CIVI	Clr	Frst	Lifetime
	65940	65984				2700K	E27		806lm	1055lm	
LF-G95	65941	65985	7.2W	8.5W	75W	6500K	EZ/	≥80	860lm	1055lm	15.000h
LF-G93	65938	65982	/.Z VV	0.5 ٧٧	/ /5W	2700K	naa	≥00	806lm	1055lm	15,000h
	65939	65983				6500K	B22		860lm	1055lm	

**DOMUS**®



### **LED Filament Series**



















LF-G120-FRS-B22





domuslighting.com.au

Item No.	Vari	ants	W	att	Watt Equiv.	ССТ	Lamp	CRI	Lumen	Output	Lifetime
	Clr	Frst	Clr	Frst	Watt Equiv.	CCI	Base	CKI	Clr	Frst	Lifetime
	65944	65988				2700K	E27		1055lm	1055lm	
LF-G120	65945	65989	7.8W	8.5W	75W	6500K		≥80	1055lm	1050lm	15,000h
LF-GIZU	65942	65986	7.0 ٧٧	8.5W	/3//	2700K	paa	200	1055lm	1055lm	
	65943	65987				6500K	B22		1055lm	1050lm	

## **LED Filament Series**















LF-C35-FRS-B15





Item No.	Vari	ants	Watt	Watt Equiv. CCT		Lamp	CRI	Lumen Output		Lifetime
	Clr	Frst	vvatt	vvatt Equiv.	CCI	Base	CIVI	Clr	Frst	Lifetime
	65926	65970			2700K	E14		470lm	470lm	
LF-G45	65927	65971	4.2W	75W	6500K	E14	≥80	500lm	470lm	15,000h
LF-G45	65928	65972	4.2 ٧٧		2700K	B15		470lm	470lm	
	65929	65973			6500K	CID		500lm	470lm	

item ivo.	Yarı	ants	Watt	Watt Equiv.	CCT	Lamp	CRI	Lumen Output		Lifetime
	Clr	Frst	yyatt	vvatt Lquiv.	CCI	Base	CKI	Clr	Frst	Lifetime
	65924	65968			2700K	E14		470lm	470lm	
LF-C35	65925	65969	4.2W	75W	6500K	C14	≥80	500lm	470lm	15.000h
LF-C33	65922	65966	4.2 **	/244	2700K	B15	≥00	470lm	470lm	13,000h
	65923	65967			6500K	DIS		500lm	470lm	

**DOMUS**®

53

### **LED Filament Series**












LF-ST64-CLR-E27



LF-ST64-CLR-B22





domuslighting.com.au

Item No.	Variants	Watt	Watt Equiv.	CCT	Lamp	CRI Lumen Outpu		Lifetime	
	Clr	vvatt	vvatt Equiv.	CCI	Base	CKI	Lumen Output	Lifetime	
	65936			2700K	E27		806lm		
LF-ST64	65937	7.2W	75W	6500K	EZ/	≥80	860lm	15,000h	
LF-3104	65934	7.244	/3//	2700K	B22	≥00	806lm	13,000h	
	65935			6500K	DZZ		860lm		

## LED Retro Vintage Filament Lamp








• Banana shape.







Item No.	Variants	Watt	CCT	Lamp Base	Lumen Output	Lifetime
LRF-T30	65961	2.3W	1800K	E27	65lm	15.000hrs
LKF-13U	65960	2.5 **	IOUUK	B22	OSIM	13,000hrs



## LED Retro Vintage Filament Lamp
















Item No.	Variants	Watt	CCT	Lamp Base	Lumen Output	Lifetime
LRF-T45	65963	3.5W	1800K	E27	120lm	15.000hrs
LKT-145	65962	3.5 **	IOUUK	B22	IZUlm	13,000hrs

### LED Retro Vintage Filament Lamp







• Pear shape.








LRF-ST64-B22





Item No.	Variants	Watt	CCT	Lamp Base	Lumen Output	Lifetime	
LRF-ST64	65955	3.5W	10001/	E27	1201	15.000hrs	
LKF-3104	65954	3.5	1800K	B22	120lm	15,000hrs	



### LED Retro Vintage Filament Lamp










LRF-G95-E27



LRF-G95-B22





Item No.	Variants	Watt	CCT	Lamp Base	Lumen Output	Lifetime
LRF-G95	65957	3.5W	1800K	E27	120lm	15,000hrs
	65956			B22		

### LED Retro Vintage Filament Lamp









• G125 Spherical shape.









Item No.	Variants	Watt	CCT	Lamp Base	Lumen Output	Lifetime	
IRF-G125	65959	3.5W	1800K	E27	1201	15.0001	
LKF-GIZD	65958	3.3 **		B22	120lm	15,000hrs	

## Key GLS 12V










- 12V DC Low Voltage LED A60 GLS Globe.
- 12V DC Constant Voltage LED Driver required.
- Dimmable with suitable 12V DC Constant Voltage Dimmable LED Driver.





domuslighting.com.au

Item No.	Variants	Watt	Watt Equiv.	CCT	Lamp Base	CRI	Lumen Output	Lifetime
KEY-GLS-E27-12V	65108	8W	75W	3000K	E27	≥80	720lm	20,000hrs
KEY-GLS-EZ/-IZV	65109	OVV	/5//	5000K	EZ/	≥00	720lm	ZU,UUUhrs

**DOMUS**°

# Key GLS TRIO

• Fully dimmable with suitable dimmers.











Available in these two bases



	Variants				IP Rating	Lumen Output			
Item No.	F27	R22	CCT	Wattage		Warm White	Neutral White	White	
	EZ/	DZZ				3000K	4000K	5700K	
KEY-GLS-TRIO	65114	65116	TRIO	12W	20	1050lm	1150lm	1150lm	











Item No.	Variants	Watt	Beam Angle	CCT	CRI	Lumen Output	Lifetime
KEY-MR16	65100	4.7W		3000K		390lm	
KEY-MRIO	65102	4.7 ٧٧	60°	5000K	≥80	420lm	15,000hrs
KEY-GU10	65096	6.2W		3000K		520lm	
KET-GUIU	65098	O.ZVV		5000K		540lm	



# LED Globes

## Key MR16 & GU10 TRIO






















KEY-GU10-TRIO





						L			
Item No.	Variants	Watt	Beam Angle	CCT	CRI	Warm White	Neutral White	White	Lifetime
						3000K	4000K	6500K	
KEY-GU10-TRIO	65112	4\A/	60°	TRIO	>80	5001	FFOL	EEOI	15 0001
KEY-MR16-TRIO	65122	OVV	000	IRIO	≥80	500lm	550lm	550lm	15,000hrs

## Key T40 TRIO & Key G9

• Fully dimmable with suitable dimmers.













KEY-T40-TRIO-B22



KEY-G9





domuslighting.com.au

	Vari	ants		R.					Lu	ımen Output		
Item No.	E27	B22	Watt	Beam Angle		( ( ( )		Warm W 3000		Neutral White 4000K	White 6500K	Lifetime
KEY-T40-TRIO	65118	65120	12W	22	0°	TRIO	≥80	650ln	n	720lm	720lm	15,000hrs
	Vo	ariants			Bear					Lumen C	Dutput	
Item No.	30001	K 500	Watt		Angl		CCT CI		CRI	Warm White 3000K	White 5000K	Lifetime
KEY-G9	65104	4 6510	<b>)6</b> 3	5W	280	° 3	000K -	5000K	≥80	280lm	300lm	15,000hrs



## LED Globes

## **Key-PAR Series**














KEY-PAR-30



KEY-PAR-38





Item No.	Variants	Watt	Watt Equiv.	IP Rating	CCT	Сар	CRI	Lumen Output	Lifetime
KEY-PAR-30	65036	12W	75W	44	3000K	E27	≥80	1050lm	30,000hrs
KEY-PAK-3U	65038	12 44	/3//		5000K	EZ/		1100lm	
NEA DYD 30	65195	4/ \\	0014/	44	3000K	F07	. 00	1350lm	20.0001
KEY-PAR-38	65197	16W	90W	44	5000K	E27	≥80	1400lm	30,000hrs



# LED Cabinet Lights

#### Astra Series












- Recessed / Surface Mounted Installation options in one fitting.
- 12V DC Constant Voltage LED Driver required.



Recessed Application



Surface Mounted Application



Recessed Cutout: Ø57mm



I. N		Variants		Wattage	IP Ratina	CCT	Lumen Output	
Item No.	Blk	Slr	Wht	vvattage	IP Kating	CCI		
ASTRA	21284	21280	21282	3.6W	20	3000K	200lm	
ASTRA	21285	21281	21283	3.0 ٧٧	20	5000K	205lm	

Requires 12V DC Constant Voltage LED Driver - Wire in Parallel

66











## How to build a profile

#### 1- Choose your application and profile










#### 2- Finish colour







#### 3- Measure the area of application



#### 4- Choose the desired light output

(wattage and colour temperature from selected range "LED Strip")







domuslighting.com.au

#### 5- Choose your driver

(from selected range "LED Drivers")


 $twr = wpm \times l + 20\%$ 

twr =	total wattage required
wpm =	watts per metre
l =	length







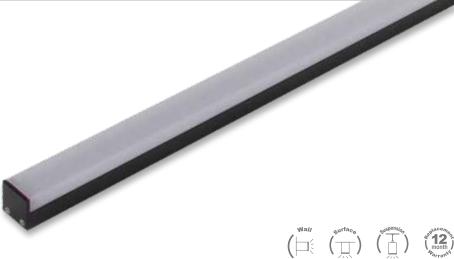


#### Bloc 20

Specification	
Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Square (PMMA) Opal colour
Length:	2500mm continuous*
Size:	(W) 19.7 <sub>mm</sub> , (H) 19.6 <sub>mm</sub>
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote driver required

- \* Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.
- \*\* Accessories to be ordered separately.

<sup>\*\*\*</sup> Special powder coat finishes upon request. Surcharges apply.







White


Suspension Kit

Compati	ble PLEX	LED Strip

7.2	14.4	19.2		
•	•	•		

Item No	variants			Details
	Blk	Alu	Wht	Details
BLOC-20-SM	22068	22010	22069	Sold per 1 metre
SUSP-KIT-2M		22041		2 Metres standard height, sold individually



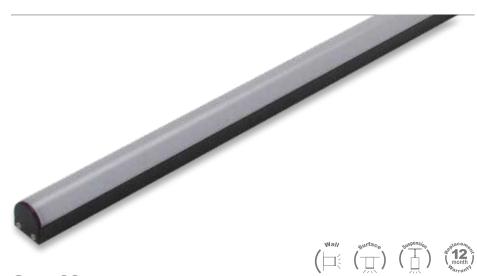


# Curve 20

Specification	
Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PMMA) Opal colour
Length:	2500mm continuous*
Size:	(W) 19.7 <sub>mm</sub> (H) 19.6 <sub>mm</sub>
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver	Remote driver required

- \* Profile sold per metre. Can be cut to suit any length up to 2.5m. Endcaps & mounting clips.
- \*\* Accessories to be ordered separately.

<sup>\*\*\*</sup> Special powder coat finishes upon request. Surcharges apply.



Compatible PLEX LED Strip

70









White

ם נו	Variants			DI
Profile	Blk	Alu	Wht	Details
CURVE-20-SM	22066	22008	22067	Sold per 1 metre
SUSP-KIT-2M	22041			2 Metres standard height,





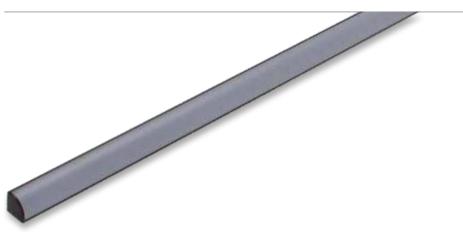






#### Corner 16 RND

Specification:	
Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PMMA) Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 16mm, (H) 16mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.












D GI		Variants	D d		
Profile	Blk	Alu	Wht	Details	
ORNER-16-RND	22070	22026	22071	Sold per 1 metre	




<sup>\*\*</sup> Special powder coat finishes upon request. Surcharges apply.

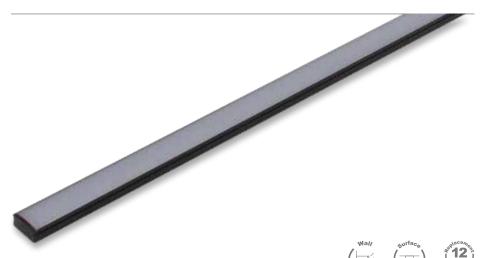

### Nova 17 SM

Specification	
Installation:	Surface or wall mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) High Output Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 17mm, (H) 8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes Endcaps & mounting clips.







#### Compatible PLEX LED Strip

7.2	14.4	19.2*			
•	•	•			
*Does not fit the IP66 version of this strip					

72

Profile	Variants			Details
Profile	Blk	Alu	Wht	Details
NOVA-17-SM	22078	22045	22079	Sold per 1 metre



#### domuslighting.com.au




## Nova 17 REC

Specification	
Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) High Output Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 23mm, (H) 8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.

<sup>\*\*</sup> Special powder coat finishes upon request. Surcharges apply.

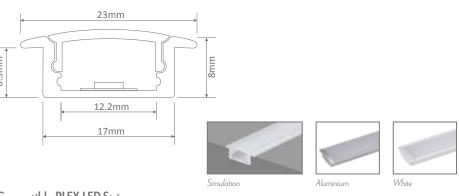

#### Compatible PLEX LED Strip

7.2 14.4 19.2*					
•	•	•			
*Does not fit the IP66 version of this strip					

ם נו		Variants	Details	
Profile	Blk	Alu	Wht	Details
NOVA-17-REC	22092	22048	22093	Sold per 1 metre




<sup>\*\*</sup> Special powder coat finishes upon request. Surcharges apply.



## Nova 24 SM

Specification	
Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) high output opal/frost
Length:	2500mm continuous*
Size:	Profile (W) 23.5mm (H) 11mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required
* 0 (1 11 )	

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes Endcaps & mounting clips.



#### Compatible PLEX LED Strip


7.2	14.4	19.2
•	•	•




White	
Details	

domuslighting.com.au






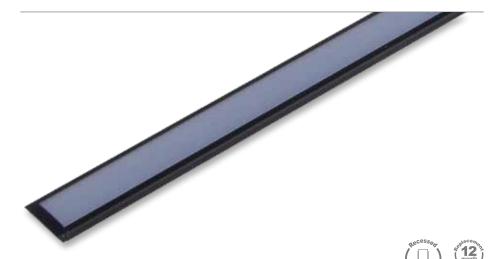

# Nova 24 REC

Recess mounted
Extruded aluminium 6063
Natural clear anodised
Flat (PMMA) high output opal/frost
2500mm continuous*
Profile (W) 30.5mm (H) 11mm
Custom powder coated colour upon request**
Remote driver required

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.







Compatible PLEX LED Strip

Compatt	Die I LLA	LLD Juith
7.2	14.4	19.2
•	•	•

Profile	Variants			DI
Profile	Blk	Alu	Wht	Details
NOVA-24-REC	22431	22430	22432	Sold per 1 metre





<sup>\*\*</sup> Special powder coat finishes upon request. Surcharges apply.

<sup>\*\*</sup> Special powder coat finishes upon request. Surcharges apply.




## $O_{mega}\,35\,\text{SM}$

_	
Specification	
Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) high output Frost colour
Length:	2500mm continuous*
Size: Profile	(W) 34.8 <sub>mm</sub> , (H) 37.5 <sub>mm</sub>
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote driver required

- \* Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.
- \*\* Accessories to be ordered separately.

<sup>\*\*\*</sup> Special powder coat finishes upon request. Surcharges apply.





76







Suspension Kit

D GI	Variants			D I	
Profile	Blk	Alu Wht		Details	
OMEGA-35-SM	22076	22050	22077	Sold per 1 metre	
SUSP-KIT-2M		22041		2 Metres standard height, sold individually	








## Bloc 42

Specification	
Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Wrap around (PMMA) Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 42.5mm, (H) 56mm
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote or integral driver required****

- \* Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.
- \*\* Accessories to be ordered separately.
- \*\*\* Special powder coat finishes upon request. Surcharges apply.

  \*\*\*\* For integral drivers use: SLIM-30, SLIM-60, SLIM-80 (12 OR 24V DC options)









White

Suspension Kit

Compati	ble PLEX	LED Strip	
72	1/1 /1	19.2	

domuslighting.com.au

ם נו	Variants			DI	
Profile	Blk	Alu	Wht	Details	
BLOC-42	22294	22020	22295	Sold per 1 metre	
SUSP-KIT-2M		22041		2 Metres standard height	
		22041		sold individually	



# LED Profiles




# Omega 35 REC

_	
Specification	
Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White.
Diffuser:	Flat (PMMA) high output Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 43.8mm, (H) 34.8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required
Size: Special:	Custom powder coated colour upon request**

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.

\*\* Special powder coat finishes upon request. Surcharges apply.









Compatible PLEX LED Strip

	Compatt	ote i LL/t	LLD Strip	
7.2		14.4	19.2	
	•	•	•	

D (I		Variants	D I	
Profile	Blk	Alu	Wht	Details
OMEGA-35-REC	22074	22034	22075	Sold per 1 metre



domuslighting.com.au







PLEX-7.2-3K

#### PLEX-14.4-4K

## **Plex 7.2**







C	
_ \	
<b>ว</b> \	
<b>~</b> /	



Plex 1	4.	4
--------	----	---





acene.	
kvrî	
J. J.	

Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	7.2W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	50 <sub>mm</sub>
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

<sup>\*\*</sup> Available upon request.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20315	3000K	518lm/m	Warm White
PLEX-7.2	20316	4000K	547lm/m	Neutral White
	20317	5000K	547lm/m	White

2700K available upon request

Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	120
Wattage Per Metre:	14.4W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	25mm
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
-	

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Continuous Run:


Strip	Variants	CCT	Lumen Output	Colour Simulation
	20319	3000K	1037lm/m	Warm White
PLEX-14.4	20320	4000K	1094lm/m	Neutral White
	20321	5000K	1094lm/m	White

5 m Max

2700K available upon request

150±5mm			50	000±	36mm							E
	50±0.	_										† 8±0.2mm
8	16.7±0.5	0 127 0	0			0	U *12V C	B.*12V D	0	D	127	
					-\-							
<u>a</u>	1.4±0.5mm		n		\ <u>\</u>		n	0		n	0	_

**DOMUS**°

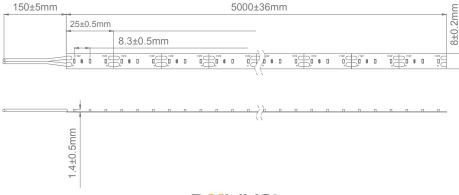

<sup>\*\*</sup> Available upon request.



PLEX-19.2-5K

#### PLEX-19.2-RED







9	lex	1	9	2	





## Plex 19.2 RGBWW







Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	240
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	25mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

<sup>\*\*</sup> Available upon request.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20323	3000K	1382lm/m	Warm White
PLEX-19.2	20324	4000K	1498lm/m	Neutral White
	20325	5000K	1498lm/m	White

2700K available upon request

Specification:	
Colours:	RGB + Warm White colour temperatures
Light Source:	5050 SMD LED
Colour Temperature:	RGB + 3000K
CRI:	80
Number of LED Per Metre:	60
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	100 <sub>mm</sub>
Requires:	24V DC Constant Voltage LED Driver & Colour Controller***
Dimmable:	Yes*

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Continuous Run:


IES files:


<sup>\*\*\*</sup> Requires CHAM-BT-RF-5C or CHAM-DIM-DALI-4C.

Strip	Variants	CCT	Lumen Output
PLEX-19.2-RGBWW	20327	RGB + 3000K	N/A

Yes\*\*

5m Max

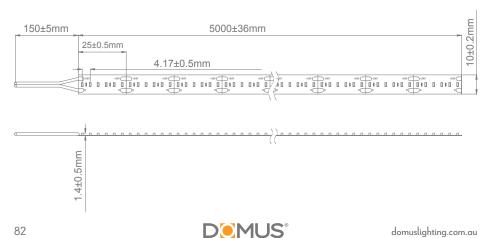

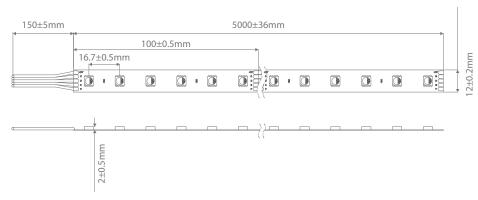

<sup>\*\*</sup> Available upon request.







### Plex 7.2 IP66








Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	7.2W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50 <sub>mm</sub>
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20333	3000K	518lm/m	Warm White
PLEX-7.2-IP66	20334	4000K	547lm/m	Neutral White
	20335	5000K	547lm/m	White

2700K available upon request

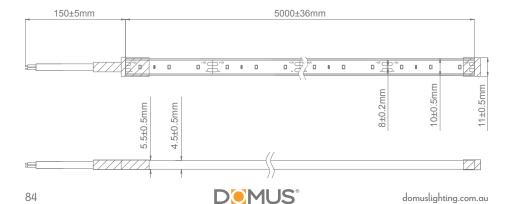

#### Plex14.4 IP66










Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	120
Wattage Per Metre:	14.4W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	25 <sub>mm</sub>
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20337	3000K	1100lm/m	Warm White
PLEX-14.4-IP66	20338	4000K	1180lm/m	Neutral White
	20339	5000K	1180lm/m	White

2700K available upon request

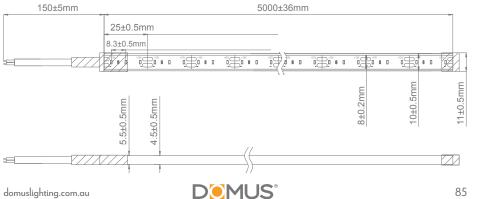

<sup>\*\*</sup> Available upon request.

<sup>\*\*</sup> Available upon request.







#### Plex 19.2 IP66







(3y (24)	'n
----------	----

Specification:	
Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	240
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	25mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20341	3000K	1382lm/m	Warm White
PLEX-19.2-IP66	20342	4000K	1498lm/m	Neutral White
	20343	5000K	1498lm/m	White

2700K available upon request

#### Plex 19.2 IP66 RGBWW











Specification:	
Colours:	RGB + Warm White colour temperatures
Light Source:	5050 SMD LED
Colour Temperature:	RGB + 3000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	100 <sub>mm</sub>
Requires:	24V DC Constant Voltage LED Driver & Colour Controller***
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

<sup>\*\*\*</sup> Requires CHAM-BT-RF-5C or CHAM-DIM-DALI-4C.

Strip	Variants	CCT	Lumen Output
PLEX-19.2-IP66-RGBWW	20344	RGB + 3000K	N/A

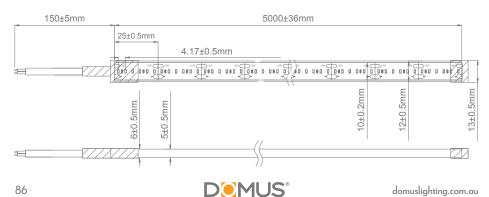

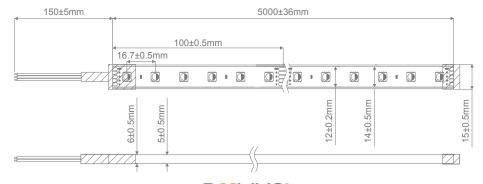

<sup>\*\*</sup> Available upon request.

<sup>\*\*</sup> Available upon request.





#### Pleo 14.4










• LED Neon Flex

Specification:	
Colours:	3 colour temperatures
Light Source:	2835 SMD LED
Colour Temperature:	3000K, 4000K & 5000K
CRI:	90
Number of LED Per Metre:	140
Wattage Per Metre:	14.4W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50 <sub>mm</sub>
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

Strip	Variants	CCI	Lumen Output	Colour Simulation
	20353	3000K	1181lm/m	Warm White
PLEO-14.4	20354	4000K	1253lm/m	Neutral White
	20355	5000K	1253lm/m	White

2700K available upon request

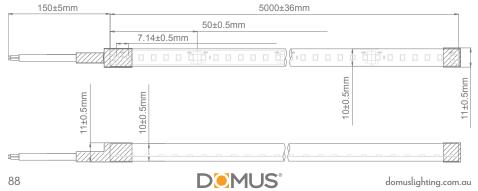

### Pleo 14.4S









- LED Neon Flex
- Side Emitting
- · Ideal for curved features


Specification:	
Colours:	3 colour temperatures
Light Source:	2835 SMD LED
Colour Temperature:	3000K, 4000K & 5000K
CRI:	90
Number of LED Per Metre:	140
Wattage Per Metre:	14.4W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50 <sub>mm</sub>
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**
Continuous Run:	5m Max

<sup>\*</sup> For dimming options please refer to the controller section for further details.

<sup>\*\*</sup> Available upon request.

Strip	Variants	CCT	Lumen Output	Colour Simulation
	20357	3000K	320lm/m	Warm White
PLEO-14.4-S	20358	4000K	346lm/m	Neutral White
	20359	5000K	370lm/m	White

2700K available upon request

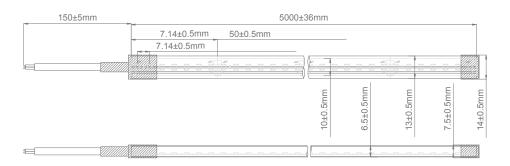

<sup>\*\*</sup> Available upon request.





# LED Controllers

#### CHAM-BT-RF-5C

The CHAM-BT-RF-5C is a 5-channel controller that can be used with a remote, touch panel wall control, or Bluetooth. Intended for use with constant voltage 12-24V DC lighting products the CHAM-BT-RF-5C offers various ways to control LED strip just by pairing it with a remote control, or a touch wall panel, or by using Bluetooth and controlling with a smart phone with the app. The CHAM-BT-RF-5C also works with GOOGLE and Alexa. Featuring 5 channels allowing control over single colour, RGB or RGBW lighting products.

Specification:	
Type of controller:	5ch 4 in 1 universal RF+ Bluetooth controller
Method of control:	PWM
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 145mm x (W) 46.5mm x (H) 16mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	5×4A
Output wattage (W):	12V DC - 48W per channel (x5). 24V DC - 96W per channel (x5).
Expandable signal:	Yes*
Requires:	Constant Voltage 12-24V DC LED driver**

<sup>\*</sup> Multiple 5CH data repeaters can be used in a single circuit.

Item No.	Variants	Details
CHAM-BT-RF-5C	20141	5CH Controllerr

















CHAM-BT-RF-5C

<sup>\*\*</sup> Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

95



#### CHAM-REM-3C

The CHAM-REM-3C is an RF + Bluetooth RGBW remote control that is to be used with the CHAM-BT-RF-5C receiver. This remote allows you to dim the LED strip, change the colour and speed up or slow down the speed of the changing colour mode. It also allows you to save specific scenes that you use on a regular basis. The CHAM-REM-3C also has a magnet on the back which allows for ease of use with the mounting bracket.

Specification:	
Type of controller:	RGBW Remote control
Protocol:	RF + Bluetooth
Dimming range:	0.1% - 100%
Remote colour:	Black
Remote size (mm):	(L) 136.3mm x (W) 38.9mm x (D) 10.7mm
Transmission frequency:	2.4GHz
Transmission range:	30 <sub>m</sub>
Operation voltage:	3VDC (CR2025)

Item No.	Variants	Details
CHAM-REM-3C	20142	RGBW Remote



#### CHAM-REM-1C

The CHAM-REM-1C is an RF + Bluetooth Single colour remote control that is to be used with the CHAM-BT-RF-5C receiver. This remote allows you to dim the LED strip. It also allows you to save specific scenes that you use on a regular basis. The CHAM-REM-1C also has a magnet on the back which allows for ease of use with the mounting bracket.

Specification:	
Type of controller:	Single colour dimming remote control
Protocol:	RF + Bluetooth
Dimming range:	0.1% - 100%
Remote colour:	Black
Remote size (mm):	(L) 150mm x (W) 38.6mm x (D) 12mm
Transmission frequency:	2.4GHz
Transmission range:	30 <sub>m</sub>
Operation voltage:	3VDC (CR2025)

Item No.	Variants	Details
CHAM-REM-1C	20143	Single Colour Remote















97





# LED Controllers

#### CHAM-TOUCH-3C

The CHAM-TOUCH-3C is an RF + Bluetooth RGBW AC wall control that is to be used with the CHAM-BT-RF-5C receiver. The CHAM-TOUCH-3C wall control allows you to dim the LED strip, change the colour, and speed up or slow down the speed of the changing colour mode. It also allows you to save specific scenes that you use on a regular basis.

Specification:	
Type of controller:	RGBW touch wall control
Output signal:	RF + Bluetooth
Dimming range:	0.1% - 100%
Colour:	White (Glass)
Dimensions (mm):	(L) 120mm x (W) 75mm x (D) 29.1mm
Cut out (mm):	(L) 70 <sub>mm ×</sub> (W) 44 <sub>mm ×</sub> (D) 20 <sub>mm</sub>
Transmission frequency:	2.4GHz
Operating temperature:	0-40°C
Power consumption:	< 15mA
Operation voltage:	240V



Item No.	Variants	Details
CHAM-TOUCH-3C	20144	3CH Wall Controller





The CHAM-TOUCH-1C is an RF + Bluetooth Single colour AC wall control that is to be used with the CHAM-BT-RF-5C receiver. The CHAM-TOUCH-1C wall control allows you to dim the LED strip, It also allows you to save specific scenes that you use on a regular basis.

Specification:	
Type of controller:	Single colour touch wall control
Output signal:	RF + Bluetooth
Dimming range:	0.1% - 100%
Colour:	White (Glass)
Dimensions (mm):	(L) 120mm x (W) 75mm x (D) 29.1mm
Cut out (mm):	(L) 70 <sub>mm ×</sub> (W) 44 <sub>mm ×</sub> (D) 20 <sub>mm</sub>
Transmission frequency:	2.4GHz
Operating temperature:	0-40°C
Power consumption:	< 15mA
Operation voltage:	240V



Item No.	Variants	Details
CHAM-TOUCH-1C	20145	1CH Wall Controller













#### CHAM-DR-4C

The CHAM-DR-4C is a 4 channel signal strength data repeater. The CHAM-DR-4C offers the ability to expand the signal strength generated by the master controller. In the situation where the load limit is exceeded or more than the limit set by the Master controller the CHAM-DR-4C is able to duplicate the signal without signal loss. This means whether using RGB, RGBW or single colour when colour changing or dimming the selected user colour will always remain the same. Particularly useful where a single master controller is used to control large areas or multiple zones.

Specification:	
Type of controller:	4ch Data Repeater
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 168mm x (W) 58mm x (H) 28mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4×8A
Output wattage (W):	12V DC - 96W per channel (x4).
	24V DC - 192W per channel (x4).
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver***
* 1 16 11 11 11	

- \* Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output.
- \*\* Multiple 4CH data repeaters can be used in a single circuit.
- \*\*\* Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variants	Details
CHAM-DR-4C	20114	4CH Data Repeater















#### CHAM-DR-1C

The CHAM-DR-1C is a 1 channel high power data repeater. The CHAM-DR-1C offers the ability to expand the signal strength generated by the master controller for dimming circuits. In situations where the load limit is exceeded or more that the limit set by the Master controller the CHAM-DR-1C is able to duplicate the signal without signal loss. This means whether dimming via RF, 0-10V, DALI or DMX you can be assured that the dimming signal will always be stable thus avoiding the appearance of dim light over larger areas. Particularly useful where a single master controller is used to control large areas or multiple zones.

Specification:	
Type of controller:	1ch High Power Data Repeater
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black metal colour housing
Housing size (mm):	(L) 150mm x (W) 54mm x (H) 31mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1×24A
Output wattage (W):	12V DC - 288W (x1)
	24V DC - 576W (x1)
Expandable signal:	Yes**
Protection:	Yes, replaceable external 25A blade fuse***
Requires:	Constant Voltage 12-24V DC LED driver ***
* Accepts signal gonerated from a Master controller	The signal output from the Master controller must be a PWM type output

- Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output
- \*\* Multiple 1CH data repeaters can be used in a single circuit.
- \*\*\* Standard replacement blade type fuse. Available from any electronics supplier.
- \*\*\*\* Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variants	Details	
CHAM-DR-1C	20134	1CH Power Data Repeater	





domuslighting.com.au















domuslighting.com.au

#### CHAM-DIM-DALI-4C

The CHAM-DIM-DALI-4C is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DALI-4C offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system. Featuring 1-4CH of dimming, allowing control over single colour, RGB or RGBW LED lighting products. The CHAM-DIM-DALI-4C make integration a breeze with options for Auto addressing or manual addressing function.

Specification:	
Type of controller:	1-4ch Dimming Controller (selectable)
Method of control:	DALI signal*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Digital display:	Yes
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4x8A
Output wattage (W):	12V DC - 96W per channel (x4)
	24V DC - 192W per channel (x4)
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***

- Accepts signal generated from automation systems via a DALI gateway (Type 6 device).
- \*\* 4CH data repeater recommended for loads that exceed the CHAM-DIM-DALI-4C limits. CHAM-DR-4C (20114) not included.
- \*\*\* Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variants	Details	
CHAM-DIM-DALI-4C	20149	4CH DALI Interface	1





















**DOMUS** 

#### CHAM-DIM-DALI-1C

The CHAM-DIM-DALI-1C is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DALI-1C offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system or simple dimming using the "Push Dim" function. Featuring 1CH of dimming, allowing control over single colour LED lighting products. The CHAM-DIM-DALI-1C make integration a breeze with options for Auto addressing or manual addressing function.

Specification:			
Type of controller:	1ch Dimmer		
Method of control:	DALI or "Push Dim"*		
Method of dimming:	PWM (Pulse Width Modulation)		
Housing colour:	Black plastic colour housing		
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm		
Digital display:	Yes		
Input voltage (VDC):	12-24V DC		
Output voltage (VDC):	12-24V DC		
Output current (A):	1 x 8A		
Output wattage (W):	12V DC - 96W (x1)		
	24V DC - 192W (x1)		
Expandable signal:	Yes**		
Requires:	Constant Voltage 12-24V DC LED driver ***		
* 1 10	6 1 1 //0 1 1 //		

- Accepts signal generated from automation systems via a DALI gateway or via momentary Switch when "Push dim" mode is selected (Type 6 device).
- \*\*\* 1CH data repeater recommended for loads that exceed the CHAM-DIM-DALI-IC limits. CHAM-DR-IC (20134) not included.
- \*\*\*\* Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variants	Details	
CHAM-DIM-DALI-1C	20132	DALI 1CH Interface	

























## LED Controllers

#### CHAM-DIM-DMX

The CHAM-DIM-DMX is an interface designed to decode DMX-512 signals. Designed for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DMX offers seamless integration between automation systems and/ or lighting desk consoles and luminaires. Accepts standard DMX-512 signal generated from any automation system or lighting control console. Featuring up to 4CH of dimming, allowing control over RGB, RGBW or single colour LED lighting products.

C	
Specification:	202144110
Type of interface:	RGBW 4ch Controller
Method of control:	DMX-512*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 168mm x (W) 58mm x (H) 28mm
Digital display:	Yes
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4 x 8A
Output wattage (W):	12V DC - 96W per channel (x4)
	24V DC - 192W per channel (x4)
Multi-channel operation:	Yes**
Expandable signal:	Yes***
Requires:	Constant Voltage 12-24V DC LED driver ****

- \* Accepts signal generated from automation systems via a DMX-512 gateway or lighting control console.
- \*\* 3-4CH selectable depending on use. RGB (3CH) or RGBW (4CH).
- \*\*\* 4CH data repeater recommended for loads that exceed the CHAM-DIM-DMX limits. CHAM-DR-4C (20114) not included.
- \*\*\*\* Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variants	Details	
CHAM-DIM-DMX	20129	4CH DMX-512 Interface	
























#### Max-50-DN







- Made in Australia from local and imported components.
- Custom lengths all made to order.










Specification



\* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









LED Profile Systems


A .	1		
Al			

Black

Variants

Wattage IP Rating CCT Lumen Output 3000K 2466lm 4000K 2600lm 3000K 2466lm 17.3W/Per Metre 20







### Max-50-REC









domuslighting.com.au



- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.






Specification	
Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 70mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.










Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item 140.	Blk	Alu	Wht	vvattage	ir Kating	CCI	Lumen Output
	22304	22300	22308			3000K	2466lm
	22305	22301	22309			4000K	2600lm
	DALI						
MAX-50-REC	22554	22550	22558	17.3W/Per Metre	20	3000K	2466lm
MAX-3U-REC	22555	22551	22559			4000K	2600lm
		0-10V					
	22556	22552	22560			3000K	2466lm
	22557	22553	22561			4000K	2600lm





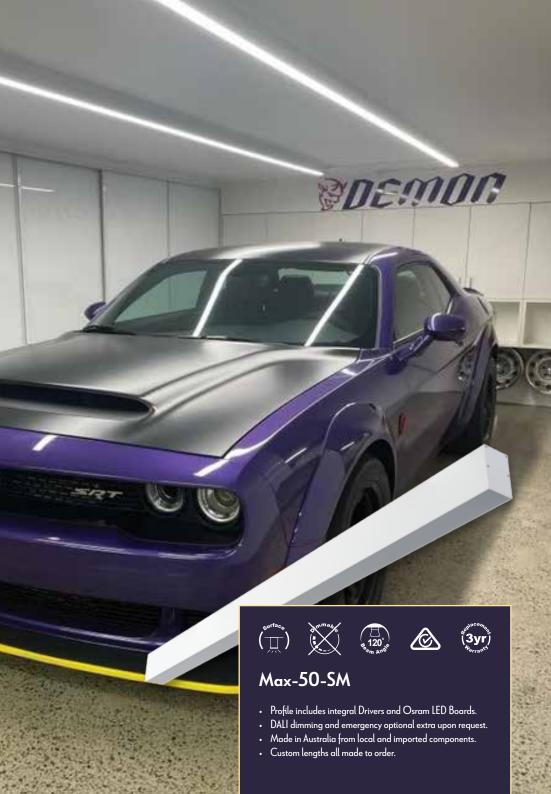




Specification	
Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 50mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









Aluminium

Black

Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item ino.	Blk	Alu	Wht	Wht	ir Kating	CCI	Lumen Output
	22316	22312	22320			3000K	2466lm
	22317 22313 22321 DALI	4000K	2600lm				
MAX-50-SM	22566	22562	22570	17.3W/Per Metre	20	3000K	2466lm
MAX-DU-SM	22567 22563 22571 17.5 W/ Fer Metre	20	4000K	2600lm			
		0-10V					
	22568	22564	22572			3000K	2466lm
	22569	22565	22573			4000K	2600lm

## Max-50-UD







- Profile emits light upwards and downwards.
- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.





domuslighting.com.au










Specification	
Installation:	Suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 50mm, (H) 90mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









Aluminium

Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item 140.	Blk	Alu	Wht	vvattage	ii Rating	CCI	Lumen Output
	22340	22336	22344			3000K	2×2466lm
	22341	22337	22345			4000K	2×2600lm
	DALI						
MAX-50-UD	22590	22586	22594	34.67W/Per Metre	20	3000K	2x2466lm
MAX-3U-UD	MAX-50-0D 22591	22587	22595			4000K	2×2600lm
		0-10V					
	22592	22588	22596			3000K	2×2466lm
	22593	22589	22597			4000K	2×2600lm





## Max-75-DN

112







- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.

















# LED Profile Systems

Specification	
Installation:	Suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 75mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









Ba

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output	
item i vo.	Blk	Alu	Wht	vvattage	ir Kating	CCI	Lumen Output	
	22376	22372	22380			3000K	2466lm	
	22377	22373	22381			4000K	2600lm	
		DALI		17.3W/Per Metre				
MAX-75-DN	22626	22622	22630		20	3000K	2466lm	
MAX-73-DIN	22627 22623 22631 17.5 W/ Per /Netre	20	4000K	2600lm				
		0-10V						
	22628	22624	22632			3000K	2466lm	
	22629	22625	22633			4000K	2600lm	

113

## Max-75-REC







- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.



domuslighting.com.au








Specification	
Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 95mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item ino.	Blk	Alu	Wht	vvattage	ir Kating	CCI	Lumen Output
	22352	22348	22356			3000K	2466lm
	22353	22349	22357			4000K	2600lm
		DALI		17.3W/Per Metre			
MAX-75-REC	22602	22598	22606		20	3000K	2466lm
MAX-73-REC	22603	22599	22607	17.5 vv/ rer /vietre	20	4000K	2600lm
		0-10V					
	22604	22600	22608			3000K	2466lm
	22605	22601	22609			4000K	2600lm



### Max-75-SM








- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.





domuslighting.com.au



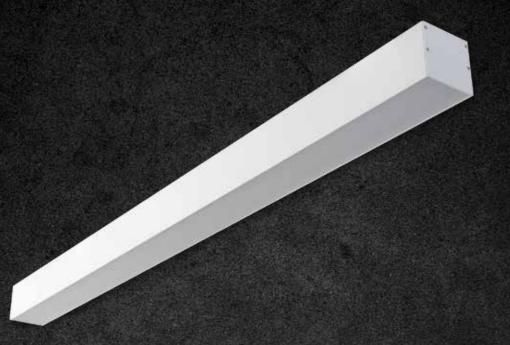




# LED Profile Systems

Specification	
nstallation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 75mm, (H) 75mm
nput:	240V
ED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

Lifespan (hrs):









Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item ino.	Blk	Alu	Wht	vvattage	ir Kating	CCI	Lumen Output
	22364	22360	22368			3000K	2466lm
	22365	22361	22369	69	20	4000K	2600lm
		DALI					
MAX-75-SM	22614	22610	22618	17.3W/Per Metre		3000K	2466lm
MAX-12-3M	22615	22611	22619	17.5 vv/ rer /vietre		4000K	2600lm
		0-10V					
	22616	22612	22620			3000K	2466lm
	22617	22613	22621			4000K	2600lm





<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.



## Max-75-UD







- Profile emits light upwards and downwards.
- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.







domuslighting.com.au










Suspension mounted							
Extruded Aluminium 6063							
Natural clear anodised, black or white powder coated							
Flat high output Opal/Frost colour							
Sold per metre*							
Profile (W) 75mm, (H) 95mm							
240V							
SMD							
>80							
120°							
No**							
50,000hrs							

<sup>\*</sup> Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

<sup>\*\* 1-10</sup>V and DALI dimming optional and available upon request.









Black

Back View

Item No.		Variants		Wattage	IP Rating	CCT	Lumen Output
item ino.	Blk	Alu	Wht	vvattage	ir Kating	CCI	Lumen Output
	22388	22384	22392			3000K	2x2466lm
	22389	22385	22393			4000K	2x2600lm
		DALI					
MAX-75-UD	<b>22638 22634 22642</b> 34.	34.67W/Per	20	3000K	2×2466lm		
MAX-73-0D	22639	22635	22643	Metre	20	4000K	2x2600lm
		0-10V					
	22640	22636	22644			3000K	2×2466lm
	22641	22637	22645			4000K	2x2600lm



LED Oysters



## $G_{ear}\,350$

- Polycarbonate Body.
- Fully dimmable with suitable dimmers.
- Low glare grille reflector.
- · Dual Wattage 17/24W.

















					Lumen Output				
Item No.	Variant	Wattage	CCT	IP Rating	Warm White	Neutral White	White		
					3000K	4000K	5700K		
GEAR-350	22672	17W/24W	TRIO	54	1550lm/1880lm	2250lm/2550lm	2250lm/2550lm		

**DOMUS**°







## Swirl 450

- Metal body, acrylic diffuser.
- Fully dimmable with suitable dimmers.















SWIRL-450-BLK



SWIRL-450-WHT

		Variant					L	umen Output	
Item No.	Blk	Sbrs	Wht	Wattage	CCT	IP Rating	Warm White	Neutral White	White
	DIK	Sprs	VV DT				3000K	4000K	5000K
SWIRL-450	22768	22769	22770	45W	TRIO	20	4900lm	4950lm	4930lm

**DOMUS**®



LED Oysters



#### Mondo Round Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.













- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.




















domuslighting.com.au



	Variants					Lumen Output			
Item No.	Item No.	Blk	Wattage IP Rating		CCT	Warm White	Neutral White	White	
Wht [	Dlk				3000K	4000K	5700K		
SOLAR-200-RND	20938	20939	15W	54	TRIO	1350lm	1400lm	1450lm	
SOLAR-300-RND	20940	20941	25W	54	TRIO	2250lm	2300lm	2350lm	
SOLAR-400-RND	20942	20943	35W	54	TRIO	3000lm	3050lm	3100lm	







	Variants					Lumen Output	
Item No.	em No. Opal	Wattage	CCT	IP Rating	Warm White	Neutral White	White
					3000K	4000K	5700K
MONDO-300	20873	20W	TRIO	44	1700lm	1750lm	1800lm
MONDO-400	20879	30W	TRIO	44	2400lm	2450lm	2500lm

122

LED Oysters















LED Oysters



## Solar Square Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.













# LED Oysters



### Easy Series

- · Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.


















SOLAR-SQR-400





domuslighting.com.au








EASY-300




EASY-400









				Lumen Output			
Item No. WI	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White
	vv ht				3000K	4000K	5700K
EASY-250-RND	20954	10W	54	TRIO	930lm	965lm	1000lm
EASY-300-RND	20955	18W	54	TRIO	1500lm	1600lm	1820lm
EASY-400-RND	20956	25W	54	TRIO	2220lm	2435lm	2650lm









### **Sunset Series**

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.














SUNSET-RND



SUNSET-SQR












domuslighting.com.au



	Variants				Lumen Output			
Item No.	Stn Wht	Wattage	CCT	IP Rating	Warm White	Neutral White	White	
	oth wint				3000K	4000K	5700K	
SUNSET-250-RND	20880	15W	TRIO	54	1300lm	1400lm	1320lm	
SUNSET-300-RND	20881	25W	TRIO	54	2160lm	2410lm	2200lm	
SUNSET-400-RND	20882	35W	TRIO	54	3020lm	3420lm	3240lm	
SUNSET-250-SQR	20886	15W	TRIO	54	1430lm	1520lm	1460lm	
SUNSET-300-SQR	20887	25W	TRIO	54	2380lm	2620lm	2490lm	
SUNSET-400-SQR	20888	35W	TRIO	54	3300lm	3570lm	3380lm	





### Panel Backlit Series

- White trim frame.
- DALI option now available, production lead times apply.















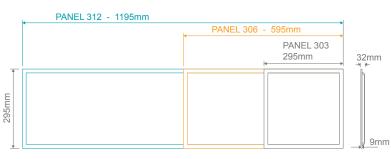

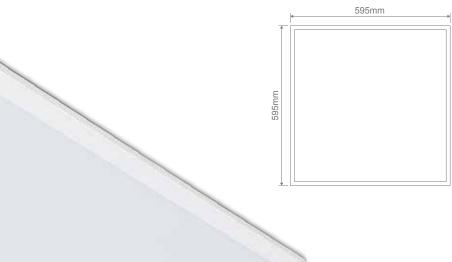

PANEL-606-BLT

	Vari	ants					Lumen Output	
Item No.	DAII	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Standard DALI	DALI				3000K	4000K	5700K
PANEL-BLT-303	17615	21645	12W	44	TRIO	900lm	1000lm	1100lm
PANEL-BLT-306	17617	21646	25W	44	TRIO	2200lm	2300lm	2350lm
PANEL-BLT-312	17619	21647	35W	44	TRIO	3200lm	3300lm	3400lm
PANEL-BLT-606	17621	21648	35W	44	TRIO	3200lm	3300lm	3400lm



# LED Panel Accessories

#### LED Panel Recessed Plaster Frames

(3yr)

- Satin White metal frame.
- To suit Plaster ceilings.



Item No.	Variants	Frame Dimensions	Cutout
TRIM-303	19324	(L)330x(W)330x(H)41mm	(L)310×(W)310mm
TRIM-306	19325	(L)630x(W)330x(H)41mm	(L)610x(W)310mm
TRIM-312	19326	(L)1230x(W)330x(H)41mm	(L)1210x(W)310mm
TRIM-606	19327	(L)630x(W)630x(H)41mm	(L)610×(W)610mm

# LED Panel Surface Mount Frames






Item No.	Variants	Frame Dimensions
SM-KIT-303-BLT	19340	(L)300x(W)355x(H)66mm
SM-KIT-306-BLT	19341	(L)600x(W)355x(H)66mm
SM-KIT-312-BLT	19342	(L)1200x(W)355x(H)66mm
SM-KIT-606-BLT	19343	(L)600x(W)655x(H)66mm

### LED Panel Surface Mount Frames Installation Guide




except plaster ceiling.




4. Move the panel into the other side of the frame






5. Insert the plastic plugs into the 4 holes to keep the panel stable.

3yr



3.Slightly tilt and insert the panel



6.Turn on the main power supply

## LED Panel Wire Suspension Kit





Item No.	Variants	Length
SUSP-KIT-2M	22041	2M Wire Suspension Kit (each)
M // . /	ſ	. [





#### **Pistol Series**

- · COB LED Chip.
- · Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.















#### **Pistol Series**

- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.


















PISTOL-15

134





	Vari	ants						
Item No.	Blk	Wht	Wattage	IPRating	CCT	Warm White	Neutral White	White
						3000K	4000K	5000K
PISTOL-15	20365	20366	15W	20	TRIO	1230lm	1420lm	1385lm



PISTOL-25



		Ø85mm
7	41mm	330°
210mm	167mm	
_		

	Variants					Lumen Output			
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
						3000K	4000K	5000K	
PISTOL-25	20367	20368	25W	20	TRIO	2370lm	2570lm	2440lm	



















### Moon Series

- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.













MOON-TRK-SPOT




MOON-TRK-TUBE





MOON-TRK-OPAL



MOON-TRK-FLD







Ø100mm 82.5mm Ø86.5mm


I N	Vari	ants	\//	ID	CCT	
item ino.	Blk	Wht	vvattage	IF		
	FLD	22796	22797		20	TRIO
MOON TRY	OPAL	22798	22799	6/9W		
MOON-IRK	SPOT	22800	22801			
	TUBE	22802	22803			
	MOON-TRK	MOON-TRK FLD OPAL SPOT	Blk   22796   OPAL   22798   SPOT   22800	Blk   Wht     FLD	MOON-TRK   SPOT   22800   22801   6/9W	No   Blk   What   Wattage   P

6W - Lumen Output

	Warm White 3000K				Neutral White 4000K				White 5700K			
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
477lm	433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm	
	9W - Lumen Output											
	Warm Whi	ite 3000	K	Neutral White 4000K				White 5700K				
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	
651lm	600lm	661lm	593lm	780lm	719lm	756lm	716lm	775lm	729lm	751lm	708lm	
651lm	6001m	661lm	593lm	/80lm	/19lm	/56lm	/16lm	//5lm	/29lm	/51lm	/08lm	

**DOMUS** 

Up to  $45^{\circ}$  tilt, 355° Rotation
























#### Up to 45° tilt, 355° Rotation




Item No.		Vari		Wattage	ID	ССТ
item ino.	Blk	Wht	vvattage	IP	CCI	
	FLD	22788	22789		20	TRIO
MOON-TRK-PDT	OPAL	22790	22791	6/9W		
MOON-IKK-PUI	SPOT	22792	22793			
	TUBE	22794	22795			

• Optional coloured baffles available for Tube or Spot Reflectors.

Moon Series

• Fully dimmable with suitable dimmers.

• SMD LED Chip. • 6W/9W Power Switchable. • 45° Tiltable, 355° Rotatable.



	6W - Lumen Output										
	Warm White 3000K				Neutral Wh	ite 4000	K		White 2	5700K	
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°
477lm	433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm
					9W - Lum	en Outpu	t				
	Warm White 3000K			Neutral White 4000K				White 5700K			
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°



domuslighting.com.au





# LED Track Lights

#### Thor Series













- To suit 3-circuit 240V Track.
- Fully dimmable with suitable dimmers.
- Black model comes standard with black baffle and 36 degree lens.
- White model comes standard with white baffle and 36 degree lens.
- Optional interchangeable baffle colours and lens options available.





# LED Track Lights

### Thor Series

#### Optional baffle colours
















Honeycomb Diffuser





74mm



THOR-15

Blk

THOR-25

		Vari	ants		ID		Lu	men Outp	ut	
15W		25W		35W		IP Rating	CCT	15W	25W	35W
	Wht	Blk	Wht	Blk	Wht	Rating		12 44	23 44	33 **
0	22255	22410	22414	22418	22422	20	3000K	1068lm	1750lm	2950lm
31	22256	22411	22415	22419	22423	20	дооок	11/17lm	2011lm	2990lm

		Variants							
Item No.	Wattage								
		Gld Wht		Blk	Honey Comb				
	15W	22265	22267	22268	22269				
THOR-ACC	25W	22440	22441	22442	22443				
	35W	22450	22451	22452	22453				

THOR-LEN	22260	22261	22262
item ino.	15D	24D	36D
Item No.	Variants		



Item No.

**THOR** 



 $V_{ariants}$ 

22170 22171 22160

22158 22159

22188 22189 22156 22157

White 22162 22163

22161

22187

Black

22186















- Three Circuit 240V Track.
- Available in 1m or 2m lengths.





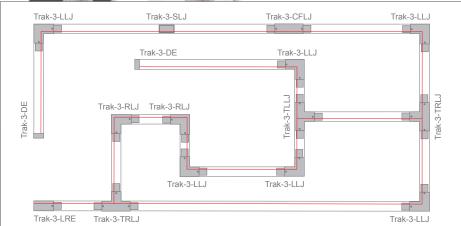


(LRE) Live Right End
(LLE) Live Left End
(DE) Dead End
(SLJ) Straight Live Joiner

(LLLJ) L Shape Left Live Joiner (LRLI) L Shape Right Live Joiner (SDI) Straight Dead Joiner (TLLJ) T Shape Right Live Joiner

(TRLJ) T Shape Left Live Joiner (ADA) Adaptor (CFLI) Centre Feed Live Joiner


I. N	Var	iants	V I.	ID D	Length	
Item No.	Blk	Wht	Voltage	IP Rating		
TRAK-3-S1M	22152	22153	240V	20	1M	
TRAK-3-S2M	22150	22151	240V	20	2M	
and the second s						

### Trak-3 Accessories











Trak-3-LLE

Item No	Variants				
item ino.	Blk	Wht			
TRAK-3-TLLJ	22176	22177			
TRAK-3-LLLJ	22164	22165			
TRAK-3-TRLJ	22178	22179			
TRAK-3-LRLJ	22166	22167			
TRAK-3-ROD	22182	22183			
TRAK-3-SUS	22184	22185			
TRAK-3-SUS-3M	22190	22191			




domuslighting.com.au

Trak-3-TLL



Trak-3-LLL







### Allegra Series

127mm

Ø380mm

146





domuslighting.com.au



- Adjustable length cord suspension.
- Part of a family of matching pendant, table lamp and floor lamp.



I. N		Variants		\A/	ρ.	
Item No.	Blk	Wht	Schr	Wattage	Requires	
ALLEGRA-PDT	22701	22702	22703	60W	1xE27 Globe (Not Included)	

# Forge Series

- Adjustable length cord suspension.
- · Part of a family of matching pendant, table lamp and floor lamp.







# **Strap Series**

- Part of a family of matching pendant, table, floor lamp and wall light.
- Adjustable length cord suspension.









Ø110mm Wilderman	


Item No.	Variants	Wattage	Requires
FORGE-PDT	22711	60W	1xE27 Globe
TORGE-FUI	22/11	00 44	(Not Included)

**DOMUS**°

Item No.	Vari	ants	\A/	Requires	
Item INo.	Blk	Wht	Wattage		
STRAP-PDT	22716	22717	60W	1xE27 Globe (Not Included)	

1 Ø60mm

150mm













	Vari	ants				Lu	ımen Output	
Item No.	Blk	Sbrs	Wht	CCT	Wattage	Warm White 3000K	Neutral White 4000K	White 5700K
						3000K	40001	3700K
SPIN-PDT	22726	22727	22728	TRIO	12W	1320lm	1320lm	1310lm

**DEMUS**°


### Madera Series








- Sphere and backplate constructed from natural timber.
- Adjustable length cord suspension.



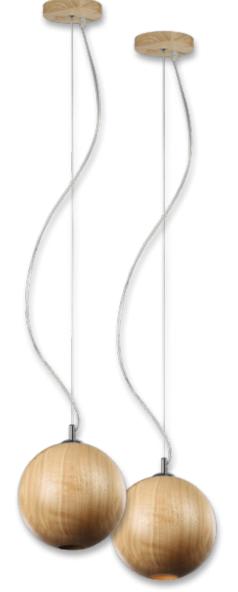


Item No.	$V_{ariants} \\$	Wattage	Requires
ADERA-PDT	22767	10W	1xGU10 Globe (Not Included)

Switched on



# Felix Series

- Adjustable length cord suspension.
- · Natural Plywood wood finish.



Variants Wattage

FELIX-PDT 22765 25W 1xE27 Globe (Not Included)












# **Hoist Series**

• Adjustable length cord suspension.







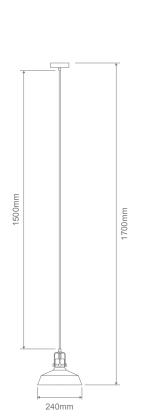



I. M		Variants		\A/	D .	
Item No.	Blk/Clear	Sch/Smoke	Abr/Amber	Wattage	Requires	
HOIST-PDT	22731	22732	22733	60W	1xE27 Globe (Not Included)	

Requires



# **Bubble Series**











Available Canopies

Item No.			ants						Wattage	Requires
item 140.	Blk	Wht	Chr	Schr	Rgld	Sbrs	Abrs	Truttage	riequires	
	BUBBLE-200-CLR	31450	31451	31452	31453	31454	31455	31456		1xE27 Globe
	BUBBLE-250-CLR	31464	31465	31466	31467	31468	31469	31470	60W	
	BUBBLE-300-CLR	31478	31479	31480	31481	31482	31483	31484		(Not Included)

Item No.		Vari	ants						١٨/	Requires
		Blk	Wht	Chr	Schr	Rgld	Sbrs	Abrs	Wattage	Requires
E	SUBBLE-200-OPL	31457	31458	31459	31460	31461	31462	31463		4 F07 CL I
	SUBBLE-250-OPL	31471	31472	31473	31474	31475	31476	31477	60W	1xE27 Globe
E	SUBBLE-300-OPL	31485	31486	31487	31488	31489	31490	31491		(Not Included)

# Flaunt Series

• Adjustable length cord suspension.









Item No.		Variants		Wattage	Requires
item ino.	Smoke	Clear	Clear Opal		Requires
FLAUNT-BLK	22737	22738	22739		
FLAUNT-SBR	22740	22741	22742	60W	1xE27 Globe (Not Included)
FLAUNT-SCH	22743	22744	22745		



### Sands


- Part of a family of matching pendant and table lamp.
- Adjustable length cord suspension.



154





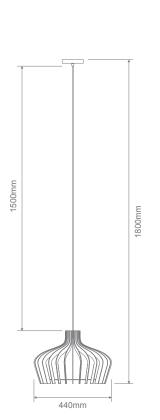



# Sail Series

• Adjustable length cord suspension.









I. N		Variants		\A/	Ρ.	
Item No.	Blk/Clear	Sch/Smoke	Abr/Amber	Wattage	Requires	
SAIL-PDT	22753	22754	22755	60W	1xE27 Globe (Not Included)	



**DOMUS** 



230mm

- Glass shade, antique brass glass holder.
   Adjustable length cord suspension.







۰	Adjustabl	le length	cord	suspension
---	-----------	-----------	------	------------



Item No.	Variants			\A/	ρ.
	Amber	Clear	Grey	Wattage	Kequires
ALICE	31300	31301	31302	60W	1xE27 Globe (Not Included)

Clear

Pendants

Ø120mm

Ø240mm

domuslighting.com.au

L NI		Variants		\A/	D .	
	Item No.	Grey	Opal	Wattage	Requires	
	EVA	31305	31306	60W	1xE27 Globe (Not Included)	

Alice Series

• Glass shade, antique brass glass holder.

• Adjustable length cord suspension.

domuslighting.com.au

(240V)

Ø130mm

# Maya Series

- Glass shade, painted black metalware.
- Adjustable length chain suspension.





Ø130mm

# Chelsea Series

- Glass shade, painted black metalware.
- Adjustable length chain suspension.



Clear	Opal	1215mm

L M	Variants			\A/	ρ .	
Item No.	Clear	Grey	Opal	Wattage	Requires	
MAYA	31330	31331	31332	60W	1xE27 Globe (Not Included)	

L NI	Variants			14/	D .
Item No.	Clear	Grey	Opal	Wattage	Requires
CHELSEA	31340	31341	31342	60W	1xE27 Globe (Not Included)



Grey

Ø230mm


Ø250mm

### Diana

160

- Glass shade, painted black metalware.
- Adjustable length chain suspension.





domuslighting.com.au

# ( 12 )

### Erin


- Glass shade, painted black metalware.
- Adjustable length chain suspension.











### Alexa

- Glass shade, painted black metalware.
- Adjustable length chain suspension.











Item No.	Variants Clear	Wattage	Requires		
ERIN	31321	60W	3xE14 Globes (Not Included)		
ALEXA	31325	00 //	3xE14 Globes (Not Included)		






# Jazz Series










Matching small and large shade option.



Copper



I. N	Variants		\A/	р .	
Item No.	Chrome	Copper	Wattage	Requires	
JAZZ-200	31355	31356	60W	1xE27 Globe (Not Included)	
JAZZ-350	31359	31360	60W	1xE27 Globe (Not Included)	



# **Evelyn Series**









Adjustable length cord suspension.



I. NI	Variants			W/	D .
Item No.	Amber	Clear	Grey	Wattage	Requires
EVELYN	31350	31351	31352	60W	1xE27 Globe (Not Included)



# Ashley







- Wire guard shade.
- Featuring plated Matt black with Antique Brass hightlights.
- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.



I. NI	Variants			\\/	р .	
Item No.	Small	Medium	Large	Wattage	Kequires	
ASHLEY-PDT	22508	22509	22510	60W	1xE27 Globe (Not Included)	







#### **Moon Series**

• SMD LED Chip.

MOON-PDT-SPOT

168

- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.



1660mm

107.3mm











Ø100mm
















Item No. Wattage CCT Blk 22772 22773 22775 6/9W 20 TRIO 22777 TUBE 22778 22779







					6W - Lum	en Outpu	t				
	Warm Wh	ite 30001	<	- 1	Neutral Wh	ite 4000	K		White 5	700K	
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°
477lm	433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm
					9W - Lum	en Outpu	t				
Warm White 3000K					Neutral White 4000K				White 5	700K	
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°
651lm	600lm	661lm	593lm	780lm	719lm	756lm	716lm	775lm	729lm	751lm	708lm

MOON-PDT-TUBE






Ø100mm

Ø60mm

domuslighting.com.au







Up to  $45^{\circ}$  tilt, 355° Rotation





# Star Series













- Adjustable cord length suspension.COB LED Chip.

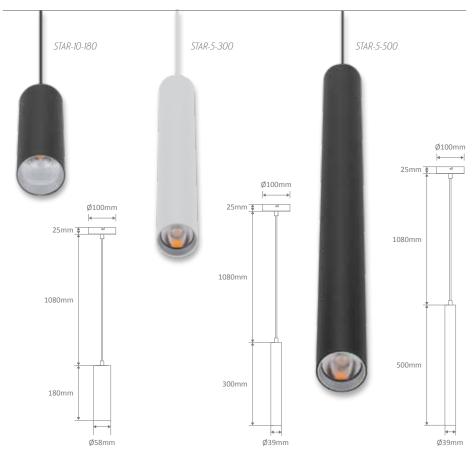

Item No.	Vari	ants	- Wattage	IP Rating	CCT	Lumen Output
item ino.	Black	White	vvattage	ir Kating	CCI	Lumen Output
	21065	21068			3000K	1000lm
STAR-10-180	21066	21069	10W	20	4000K	1050lm
	21067	21070			5000K	1100lm
	21051	21054			3000K	500lm
STAR-5-300	21052	21055	5W	20	4000K	530lm
	21053	21056			5000K	550lm
	21058	21061			3000K	500lm
STAR-5-500	21059	21062	5W	20	4000K	530lm
	21060	21063			5000K	550lm

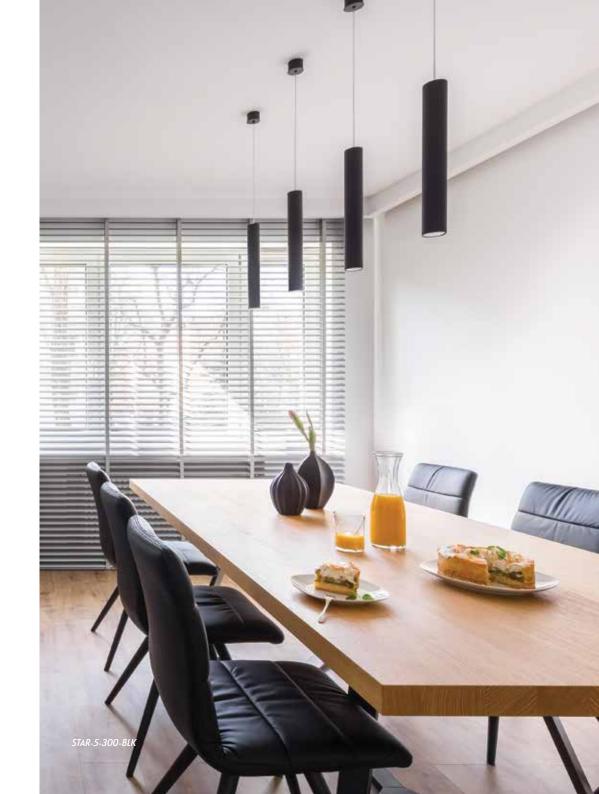



# Luna Series







- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.






I. NI		Vari	ants			\A/	р.
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Requires
LUNA-400	31363	31364	31365	31366	31367	60W	1xE27 Globe (Not Included)



# Zoey Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.



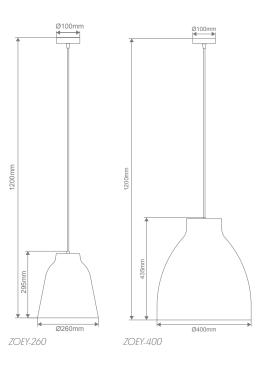

I. NI		Vari	Wattage	Requires				
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel Bla		White	vvattage	Requires	
ZOEY-260	31374	31375	31376	31377	31378	60W	1xE27 Globe (Not Included)	
ZOEY-400	31379	31380	31381	31382	31383	60W	1xE27 Globe (Not Included)	



Variants							D .
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Requires
LAYA-360	31400	31401	31402	31403	31404	60W	1xE27 Globe (Not Included)
LAYA-460	31405	31406	31407	31408	31409	60W	1xE27 Globe (Not Included)

Ø460mm

LAYA-460

Black



LAYA-360

Ø360mm



# Ruby Series









Adjustable length cord suspension.





I. M		Vari	\A/	Dt			
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Kequires
RUBY-185	31392	31393	31394	31395	31396	60W	1xE27 Globe (Not Included)





# Jade-220 Series







- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.






L N		Vari	ants			\A/	р.
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Kequires
JADE-220	31412	31413	31414	31415	31416	60W	1xE27 Globe (Not Included)





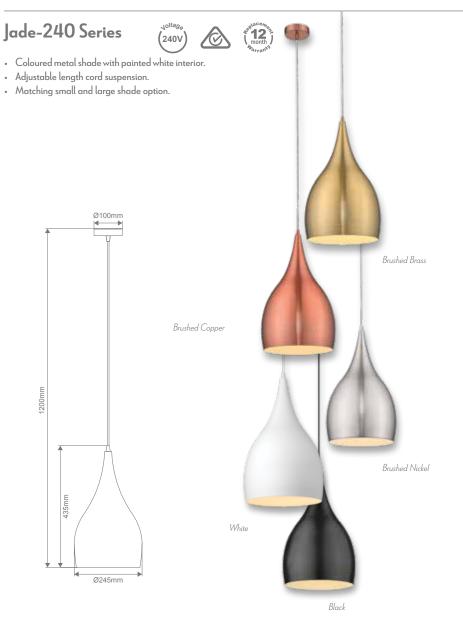

L N		Vari	ants			\A/	D .
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Kequires
JADE-240	31417	31418	31419	31420	31421	60W	1xE27 Globe (Not Included)

**DOMUS**°

domuslighting.com.au







I. N		Vari	ants			۱۸/	р .
Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Kequires
MELODY-300	31440	31441	31442	31443	31444	60W	1xE27 Globe (Not Included)





### Nova Series







• Coloured metal shade with painted white interior.


Black

• Adjustable length cord suspension.



	I. NI		Vari	ants			\A/	ρ.
	Item No.	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White	Wattage	Kequires
1	NOVA-420	31430	31431	31432	31433	31434	60W	1xE27 Globe (Not Included)










# **Jupiter Series**

- Polished Chrome metalware, K9 Crystal.LED 5000K lamps included.




JUPITER-46-1











JUPITER-46-2






Item No.	Variants	Wattage
JUPITER 46-1	35001	5×6W GU10
JUPITER 46-2	35002	5x6W GU10






# **Boomerang Series**

- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.



BOOMERANG-40






domuslighting.com.au


- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.










EVEREST-60





Item No.	Variants	Wattage
BOOMERANG 40	35020	4x6W GU10
BOOMERANG 66	35022	8x6W GU10






Item No.	Variants	Wattage
EVEREST 40	35005	5×6W GU10
EVEREST 60	35006	9x6W GU10



### Raindrop Series

- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.



























Item No.	Variants	Wattage
RAINDROP 66	35009	9x6W GU10
RAINDROP 86	35010	12×6W GU10





Item No.	Variants	Wattage
SNOWDROP 66	35017	9x6W GU10
SNOWDROP 86	35018	12×6W GU10





domuslighting.com.au

# Arctic Series

- Polished Chrome metalware, K9 Crystal.
- LED 5000K boards included.














- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.










STARLIGHT-C30





Item No.	Variants	Wattage
ARCTIC-50	35050	19x4W LED Boards built into crystal drops
ARCTIC-80	35051	40x4W LED Boards built into crystal drops





Item No.	Variants	Wattage		
STARLIGHT C20	35030	3x3W G9		
STARLIGHT C30	35031	4x3W G9		



## Starlight Series

- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.
- Surface mount flush ceiling light.
- Matching ceiling light and pendant options.






STARLIGHT-C60

STARLIGHT-C80

# Starlight Series


- Polished Chrome metalware, K9 Crystal.
- LED 5000K lamps included.
- Adjustable length wire suspension.
- Matching ceiling light and pendant options.









STARLIGHT-P80




194



Item No.	Variants	Wattage		
STARLIGHT C60	35032	4x3W G9		
STARLIGHT C80	35033	8x3W G9		



domuslighting.com.au



Item No.	Variants	Wattage
STARLIGHT P60	35034	4x3W G9
STARLIGHT P80	35035	8x3W G9







RAINBOW-60


500(L) x 120(W)mm


600(L) x 160(W)mm



LED Crystal Pendants



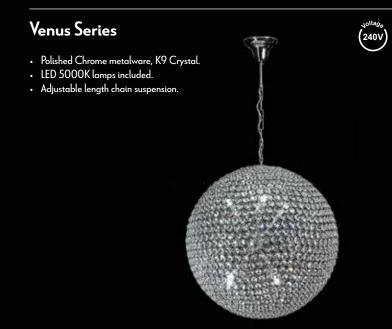



Venus-40

Item No.	Variants	Wattage
RAINBOW 60	35048	6x3W G9
RAINBOW 90	35049	9x3W G9

**DOMUS**°

Wattage Item No. Variants 35040 5x3W G9

500(L) x 120(W)mm

900(L) x 160(W)mm



#### Max-50-DN Series













- Profile includes Driver and Osram LED Boards.
- Aluminium profile and PMMA opal diffuser.
- Adjustable length wire suspension.
- Made to order in Australia from local and imported components.

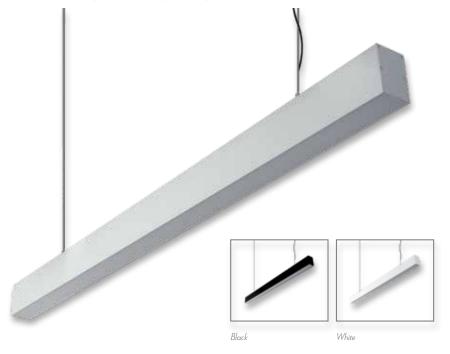



Item No.	Variants			Wattage	IP Rating	CCT	Lumen Output	
item 140.	Blk	Wht	Alu	vvullage	ii Ruttiig	CCI	Lumen Output	
MAX-50-1.2M	22469 22478 22460 20.84	20.8W	.8W 20	3000K	2960lm			
MAX-30-1.2M	22470	22479	22461	20.0 **	20	4000K	3120lm	
MAX-50-1.7M	22472	22481	22463	31.2W	20	3000K	4440lm	
MAX-3U-1.7M	22473	22482	22464 31.2VV	31.2		4000K	4680lm	
MAX-50-2.4M	22475	22484	22466	41.6W	20	3000K	5920lm	
MAX-3U-2.4M	22476	22485	22467	41.0 **	20	4000K	6240lm	

### Bloc-42 Series



LED Linear Pendants







- Profile includes Driver and Osram LED Boards.
- Aluminium profile and PMMA opal diffuser.
- Adjustable length wire suspension.
- Made to order in Australia from local and imported components.



	Item No.	Blk	Variants Alu	Wht	Wattage	IP Rating	CCT	Lumen Output
			23055		20.8W		3000K	2960lm
	BLOC-42-1.2	23062	23057	23072		20	4000K	3120lm
		23064	23059	23074			6500K	3120lm
		23090	23080	23100			3000K	4440lm
	BLOC-42-1.7	23092	23082	23102	31.2W	20	4000K	4680lm
Ì		23094	23084	23104			6500K	4680lm







# LED Linear Pendants

# Pipe-60 Series













Black




White

Item No.	Variants			Wattage	IP Ratina	CCT	Lumen Output
item i vo.	Blk	Alu	Wht	vvattage	ir Rating	CCI	Lumen Output
	23115	23110	23120			3000K	1658lm
PIPE-60-1.2M	23116	23111	23121	21W	20	4000K	1797lm
	23117	23112	23122			5000K	1/9/lm
	23130	23125	23135			3000K	2349lm
PIPE-60-1.7M	23131	23126	23136	31W	20	4000K	2546lm
	23132	23127	23137			5000K	2340lm

2 Metres Suspension kit included



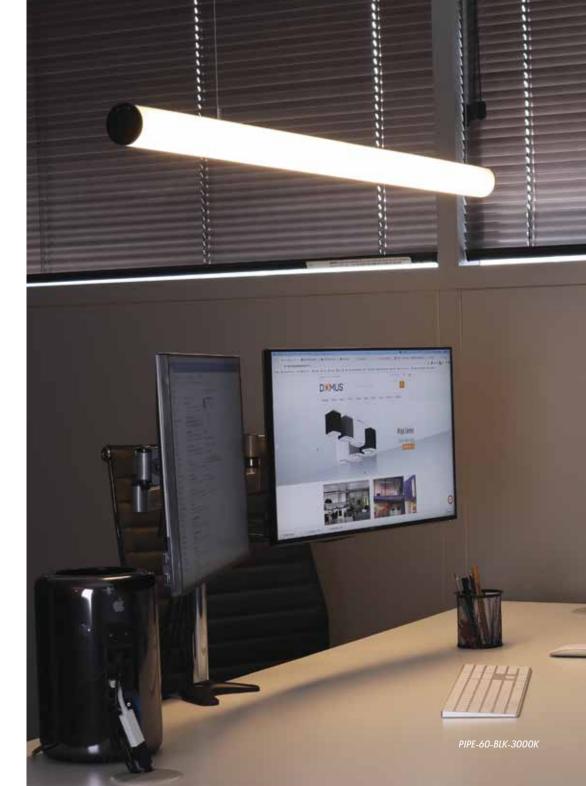

# Strap Series







• Part of a family of matching pendant, table, floor lamp and wall light.

# Allegra Series

ertes	(240
v of matching pandant table and floor lamp	






					520mm	0164mm
Item No.	m No. Variants		- W D .			
	Blk	Wht	Wattage	Requires		
STRAP-TL	22720	22721	60W	1xE27 Globe (Not Included)		Ø160mm

**DOMUS**°



Item No.	Variants			\A/	р .
	Blk	Wht	Schr	Wattage	Requires
ALLEGRA-TL	22704	22705	22706	60W	1xE27 Globe (Not Included)



**DOMUS**®

# Forge







• Part of a family of matching pendant, table lamp and floor lamp.










- Part of a family of matching pendant and table lamp.
- Natural Plywood wood finish.







 Item No.
 Variants
 Wattage
 Requires

 FORGE-TL
 22712
 60W
 1xE27 Globe (Not Included)

 Item No.
 Variants
 Requires

 SANDS-TL
 22750
 1xE27 Globe (Not Included)

domuslighting.com.au

# **Ashley Series**





- Matt Black plated with Antique Brass highlights and a black cloth shade.

• Part of a family of matching pendant, table lamp, floor lamp and desk lamp.


• Available in three sizes.







**DOMUS** 




## Small Medium Large 22512 | 22513 | 22514 | 1xE27 Globe (Not Included)

#### Giana Series

- Square tube base with linen fabric shade.
- Includes 2A USB port.
- Available in the choice of Satin Brass metalware with a black shade, or Satin Chrome metalware with a white shade.





Depth of shade is 160mm

I. NI	Var	iants	D .	
	Item No.	Satin Brass	Satin Chrome	Requires
	GIANA-TL	22542	22543	1xE27 Globe (Not Included)

### Sandra Series







Available Antique Brass or Satin Chrome base complete.
 with a cylindrical white linen fabric shade.



	35UMM	
200mm		470mm
المال		

Item No.	Vari	ants	D .	
	Antique Brass	Satin Chrome	Requires	
ANDRA-TL	22545	22546	1xE27 Globe (Not Included)	

**DOMUS** 

# Ashley







- Asiney
- $\bullet$   $\,$  Metal base, thin frame and wire guard shade.
- Featuring plated Matt Black with Antique Brass highlights.
- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.



Item No.	Variants Blk	Requires	
ASHLEY-DL	22516	1xE14 Globe (Not Included)	



SANDRA-TL-ABR

### **Leah Series**







- Metal base, thin metal frame and a traditional conical shade.
- Available Matt White and Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.



**DOMUS** 

Item No.	Vari	ants	D .
	Blk	Wht	Requires
LEAH-DL	22536	22537	1xE14 Globe (Not Included)

#### Marisol







- White marble base, thin frame and metal cylindrical shade.
- Featuring plated Antique Brass and painted Black Shade.
- · Part of a family of matching desk lamp and floor lamp.



Item No.	Variants Blk	Requires	
MARISOL-DL	22522	1xE14 Globe (Not Included)	







- Metal base, thin frame and a wire mesh shade.
- Featuring plated Matt Black with Antique Brass highlights.
- · Part of a family of matching desk lamp and floor lamp.



I. NI	Variants	Requires	
Item No.	Blk		
RUSTICA-DL	22519	1xE14 Globe (Not Included)	

**DOMUS** 

#### **Tinley Series**







- Slim metal tube design and an adjustable knuckle holding a stylish dome shade.
- Available in Antique Chrome, Antique Brass and Antique Copper.
- Part of a family of matching table lamp, and floor lamp.





I. NI	Variants			р .
Item No.	A/Brs	A/Chr	A/Cop	Requires
TINLEY-DL	22525	22526	22527	1xE14 Globe (Not Included)

## Strap Series

• Part of a family of matching pendant, table, floor lamp and wall light.








## Allegra Series


• Part of a family of matching pendant, table lamp and floor lamp.







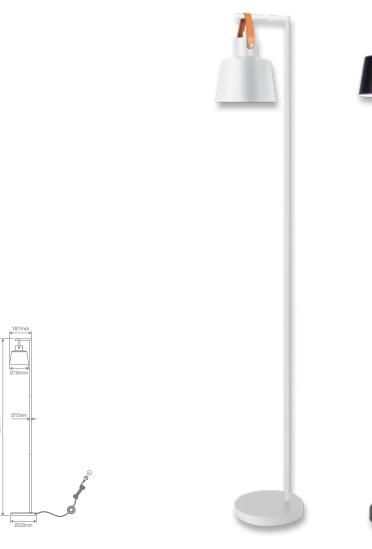

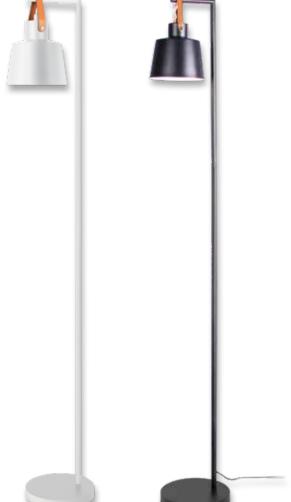

domuslighting.com.au



Item No.		$V_{ariants} \\$	ts Wattage		р.	
	Blk	Wht	Schr	Wattage	Requires	
ALLEGRA-FL	22707	22708	22709	60W	1xE27 Globe (Not Included)	



**DOMUS** 

Requires

1xE27 Globe (Not Included)





Item No.

 $V_{ariants}$ 

22718 22719

Wht

60W

Blk

#### Forge


• Part of a family of matching pendant, table lamp and floor lamp.









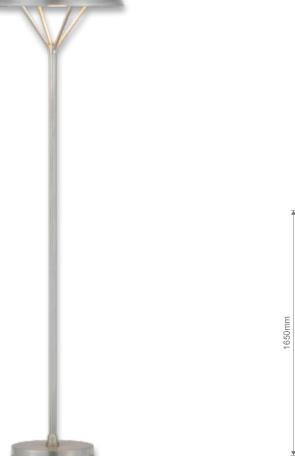

**DOMUS**°




Item No.	$V_{ariants}$	Wattage	Requires
FORGE-FL	22713	60W	1xE27 Globe (Not Included)


## Ashley



• Featuring plated Matt Black with Antique Brass highlights.







Item No.	Variants Blk	Requires	
ASHLEY-3FL	22517	3xE14 Globe (Not Included)	

#### Eden Series









- Features an 18W LED uplighter (Mother) and a 5W task light (Child).
- Available in Black, Satin Chrome and Antique Brass finishes, with a white frosted glass for the uplighter.
- Dimmable dials available for both lights, producing a nice warm 3000K Warm White LED colour temperature.



Item No.		CCT		
	A/Brs	Blk	S/Chr	CCI
EDEN-FL	22500	22501	22502	3000K









- Chrome highlights with painted metal.
- Featuring an adjustable head to direct light to desired area.



Item No.	Variants		D .
	Blk	Wht	Requires
ELSA-FL	22533	22534	1xE27 Globe (Not Included)

#### Leah Series







- Metal base, thin metal frame and a traditional conical shade.
- Available Matt White and Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.



Item No.	Variants		ρ.
	Blk	Wht	Requires
LEAH-FL	22539	22540	1xE27 Globe (Not Included)

**DOMUS** 










- White marble base, thin frame and metal cylindrical shade.
- Featuring plated Antique Brass and painted Black Shade.
- · Part of a family of matching desk lamp and floor lamp.



Item No.	Variants Blk	Requires
MARISOL-FL	22523	1xE14 Globe (Not Included)





250mm

Floor Lamps

# Rustica

- Metal base, thin frame and a wire mesh shade.
- Featuring plated Matt Black with Antique Brass highlights.
- · Part of a family of matching desk lamp and floor lamp.



		1570mm
250	mm	<u>z</u>

Item No.	Variants Blk	Requires	
RUSTICA-FL	22520	3xE14 Globes (Not Included	

**DOMUS** 

## Tinley Series



• Available in Antique Chrome, Antique Brass and Antique Copper.

• Part of a family of matching table lamp and floor lamp.



I. NI		Variants			D .
	Item No.	Abrs	Achr	Асор	Kequires
	TINLEY-FL	22529	22530	22531	1xE27 Globe (Not Included)

#### Switch hnology

#### Charge-01 Series

- Bedside wall light with wireless charging phone shelf.
- USB Charging port.
- 2W Focus Tricolour Swithable light.
- Fully dimmable with suitable dimmers.
















I. N	Variants Variants		Wattage	IP Rating	CCT	Lumen Output	
Item No	Blk	Wht	vvattage	IP Kating	CCI	Lumen Output	
CHARGE-01	22695	22696	2W	20	TRIO	150lm	



## Bedside Light

## Charge-02 Series










- Touch Switch.
- Left and right USB charging ports.
- Dimmable by pressing and holding touch switch.
- Focus LED Light + Backlit LED Light.
- Bedside wall light with phone shelf.





This model features a backlit LED Light, but requires cable to plug into USB to charge phone



I N.	Vari	ants	Wat	tage	IP Ratina	CCT	Lumen	Output
Item No.	Blk Wht		Focus	Ambient	ir Kating	CCI	Focus	Ambient
CHARGE-02	22697	22698	4.5W	4.5W	40	3000K	350lm	300lm





229




LED Wall Lights

#### Lumaline-2 Series

228

- Profile includes Driver and Plex-19.2 strip.
- Light emits upwards and downwards.
- Aluminium profile and PMMA opal diffuser.
- Made to order in Australia from local and imported components.





900mm

5000K

2×1348lm

Item No.	Variants	Wattage	Colour	IP Rating	CCT	Lumen Output
	23600				3000K	2x830lm
	23602		Aluminium		4000K	2×899lm
	23604		Black		5000K	2x899lm
	23610				3000K	2x830lm
LUMALINE-2-600	23612	2×11.5W		20	4000K	2x899lm
	23614				5000K	2x899lm
	23620				3000K	2x830lm
	23622		White		4000K	2x899lm
	23624				5000K	2x899lm
	23650				3000K	2×1244lm
	23652		Aluminium		4000K	2x1348lm
	23654				5000K	2x1348lm
	23660				3000K	2x1244lm
LUMALINE-2-900	23662	2×17.5W	Black	20	4000K	2x1348lm
	23664				5000K	2x1348lm
	23670	1			3000K	2~12/J/J/m

White

#### Shadowline Series







• Made to order in Australia from local and imported components.










Item No.	Variants	Wattage	Colour	IP Rating	CCT	Lumen Output
	23500				3000K	660lm
	23502		Aluminium		4000K	708lm
	23504				5000K	708lm
	23510				3000K	660lm
SHADOWLINE-600	23512	9W	Black	20	4000K	708lm
	23514				5000K	708lm
	23520				3000K	660lm
	23522		White		4000K	708lm
	23524				5000K	708lm
	23550				3000K	990lm
	23552		Aluminium		4000K	1062lm
	23554				5000K	1062lm
	23560				3000K	990lm
SHADOWLINE-900	23562	13W	Black	20	4000K	1062lm
	23564				5000K	1062lm
	23570				3000K	990lm
	23572		White		4000K	1062lm
	23574				5000K	1062lm



230

I. NI	Vari	ants	\A/	ρ.		
Item No.	Blk	Wht	Wattage	Requires		
STRAP-WB	22722	22723	60W	1xE27 Globe (Not Included)		















- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.









ltem No. Blk Wht Wattage IP Rating CCT Warm White Neutral White White 3000K 4000K 5700K		Vari	ants					Lumen Output	
3000K 4000K 5700K	Item No.	RII.	\A/I	Wattage	IP Rating	CCT	Warm White	Neutral White	White
		DIK	vvnt				3000K	4000K	5700K
GLOW-8 22660 22661 8W 20 TRIO 320lm 350lm 400lm	GLOW-8	22660	22661	8W	20	TRIO	320lm	350lm	400lm

**DOMUS**®





#### **Moon Series**

- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.

















MOON-WALL-SPOT





Ø101mm

MOON-WALL-TUBE


	Item No.		Vari	ants	\\/	IP	CCT
	Item INo.	Blk	Wht	Wattage	IP	CCI	
Γ		FLD	22820	22821			
	MOON-WALL	OPAL	22822	22823	6/9W	20	TRIO
		SPOT	22824	22825	0/9//		
		TUBE	22826	22827			

6W - Lumen Output											
Warm White 3000K Neutral White 4000						ite 4000	K		White 2	5700K	
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°
477lm	433lm	498lm	430lm	556lm	504lm	534lm	504lm	561lm	513lm	536lm	515lm
					9W - Lum	en Outpu	t				
Warm White 3000K Neutral White 4000K White 5700K											
Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°	Fld-60°	Opal-130°	Spot-30°	Tube-60°
651lm	600lm	661lm	593lm	780lm	719lm	756lm	716lm	775lm	729lm	751lm	708lm

**DOMUS** 




MOON-WALL-OPAL






MOON-WALL-FLD



Up to 45° tilt, 355° Rotation



























234



	Vari	ants					Lumen Output	
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White
	Dlk	vvnt				3000K	4000K	5700K
SINTA-8	22674	22675	8W	20	TRIO	700lm	725lm	750lm

#### Deens 8

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.




















	Vari	ants					Lumen Output	
Item No.	Item No. Blk		Wattage	IP Rating	CCT	Warm White	Neutral White	White
	DIK	Wht				3000K	4000K	5700K
DEENS-8	22679	22680	W8	20	TRIO	660lm	680lm	700lm

**DOMUS**®



## LED Vanity Lights



#### Mirror Series

- Aluminium profile and PMMA opal diffuser.
- Adjustable Polished chrome knuckles.
















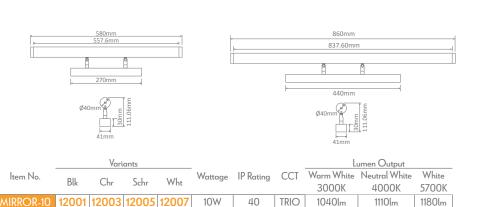



1590lm

1718lm

1845lm


















MIRROR-20-CHR



MIRROR-20-WHT



		Vari	ants						Lumen Output	
Item No.	DII	CI	C 1	147	Wattage	IP Rating	CCT	Warm White	Neutral White	White
	Blk	Chr	Schr	Wht	_			3000K	4000K	5700K
MIRROR-20	12021	12023	12025	12027	20W	40	TRIO	2100lm	2200lm	2300lm

**DOMUS** 





HL-804 Series


White





Satin Chrome

I. NI		Vari	ants		
Item No.	Blk	Chr	Schr	Wht	Requires
HL-804-4LT	16318	16320	16323	16324	4xB15 Globes (Not included)
HL-804-5LT	16327	16329	16332	16333	5xB15 Globes (Not included)
HL-804-6LT	16336	16338	16341	16342	6xB15 Globes (Not included)
HL-804-7LT	16345	16347	16350	16351	7xB15 Globes (Not included)
HL-804-8LT	16354	16356	16359	16360	8xB15 Globes (Not included)

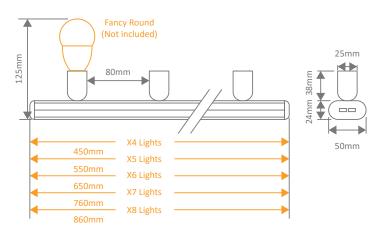






#### BF-2012

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2012	11034	Raw	1xG9 (Not Included)










#### BF-2013

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-2013	11074	Raw	1xG9 (Not Included)









domuslighting.com.au







#### BF-2014

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2014	11035	Raw	2xG9 (Not Included)











#### BF-2018

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2018	11075	Raw	1xG9 (Not Included)







**DOMUS** 












Item No.	Variants	Colour	Lamp
BF-2019	11076	Raw	2xG9 (Not Included)










## BF-2185

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2185	11036	Raw	1xG9 (Not Included)










Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.


Item No.	Variants	Colour	Lamp
BF-2020	11077	Raw	2xG9 (Not Included)







Raw modern round indirect wall light. Creates a soft and subtle feature for feature wall lighting. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2350	11080	Raw	1xG9 (Not Included)
























Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2440	11081	Raw	1xE27 (Not Included)










#### BF-2601A

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-2601A	11082	Raw	1xG9 (Not Included)














domuslighting.com.au



#### BF-2601B

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-2601B	11083	Raw	1xG9 (Not Included)







#### BF-2607A

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint

Item No.	$V_{ariants}$	Colour	Lamp
BF-2607A	11084	Raw	1xG9 (Not Included)







**DOMUS** 











#### BF-2607B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint

Item No.	$V_{ariants}$	Colour	Lamp
BF-2607B	11085	Raw	1xG9 (Not Included)










#### BF-2608A

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2608A	11090	Raw	2xG9 (Not Included)












Raw ceramic wall light. Ceramic areas can be painted with any water based paint

Item No.	$V_{ariants}$	Colour	Lamp
BF-7577	11042	Raw	1xE27 (Not Included)












#### BF-7578

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-7578	11044	Raw	1xE27 (Not Included)






















## Ceramic Wall Lights

#### BF-2608B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp
BF-2608B	11091	Raw	2xG9 (Not Included)












#### BF-7310

Raw ceramic wall light. Ceramic areas can be painted with any water based paint. Made in Italy.

Item No.	Variants	Colour	Lamp
BF-7310	11040	Raw	1xE27 (Not Included)
















## Ceramic Wall Lights

### BF-7603

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based

Item No.	$V_{ariants}$	Colour	Lamp
BF-7603	11049	Raw	1xE27 (Not Included)















BF-7949

installations only.

Item No. Variants Colour

Raw ceramic wall light complete with frosted

BF-7949 11101 Raw 1xE27 (Not Included)

glass. Ceramic areas can be painted with any water based paint. Corner mounted






300mm





Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based

Item No.			Lamp
BF-7908	11051	Raw	1xE27 (Not Included)



#### BF-8042

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.			Lamp
BF-8042	11102	Raw	1xE27 (Not Included)





251


























#### BF-8235

Raw ceramic wall light complete with open slot. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-8235	11115	Raw	1xE27 (Not Included)












Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-8258	11116	Raw	1xE27 (Not Included)








Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.	Variants	Colour	Lamp	
BF-8284	11121	Raw	2xG9 (Not Included)	












#### BF-8286

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.	$V_{ariants}$	Colour	Lamp
BF-8286	11122	Raw	1xE27 (Not Included)

















**DOMUS**°





255






#### BF-8259

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based

Item No.			Lamp
BF-8259	11118	Raw	1xE27 (Not Included)













BF-8411

Item No. Variants Colour BF-8411 11131 Raw

paint.


Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based

460mm

1xE27 (Not Included)

Raw ceramic wall light. Light emits both ways. Ceramic areas can be painted with any water based paint.










BF-8276 Raw ceramic wall light. Ceramic areas can be painted with any water based paint.





















### Camino Series

- · Cast Aluminium, powder coated.
- Inbuilt LED driver included (240V Version).
- Tricolour Switchable.
- Fully dimmable with suitable dimmers (240V Version).















- · Cast Aluminium, powder coated.
- Inbuilt LED driver included (240V Version).
- Tricolour Switchable.
- Fully dimmable with suitable dimmers (240V Version).
























Cut-out: Ø45mm

Item No.












domuslighting.com.au

Cut-out: Ø45mm




							3000K	4000K	JUUUK	
CAMINO-12V-RND	ASY	21766	21768	3W	54	TRIO	62lm	73lm	66lm	
CAMINO-IZY-KIND	SLOT	21749	21780	3 44	54	IKIO	OZIM	7 Jim	OOlm	
CAMINO 2/IOV DND	ASY	21747	21748	3W	54	TRIO	62lm	73lm	66lm	
CAMINO-240V-RND	SLOT	21741	21742	3 44	34	IRIO	OZIM	/ Jlm	OOlm	
CAMINO-12V-SQR	ASY	21761	21762	3W	54	TRIO	62lm	73lm	66lm	
CAMINO-121-3QR	SLOT	21781	21782	3 //	34	IRIO	OZIM	/ 3lm	OOlm	
	ASY	21745	21746	2147	E d	TDIO	/ 01	721	//1	
CAMINO-240V-SQR	SLOT	21743	21744	3W	54	TRIO	62lm	73lm	66lm	











Cut-out: L125xW50mm

	Variant					Lumen Output				
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White		
	Dlk	vv ht				3000K	4000K	5000K		
CAMINO-12V-RECT	21764	21770	3W	54	TRIO	120lm	140lm	125lm		
CAMINO-240V-RECT	21767	21763	3W	54	TRIO	120lm	140lm	125lm		

**DOMUS**°









## LED Battens





Fully complaint to AS/NZS 2293 standards Compliance: Battery:

LiFePO4 battery type, 6.4V, 7 Hour Charging Time,

1.5 Hours Discharging Time

1500 mAh at 0.2 CmA Battery Capacity:

Sustained Emergency: Rated Duration: 120 Min

Classification: C0: D50, C90: D32












259





### **Bolt Series**

- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.

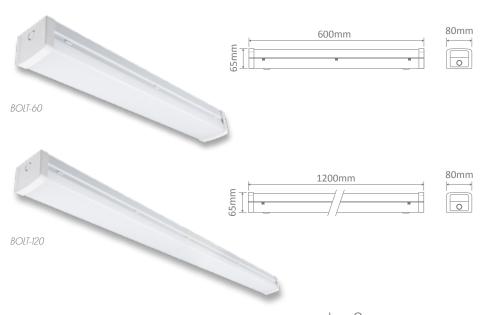

					Lumen Output					
Item No.	Variants	Wattage	IP Rating	CCT	Warm White	Neutral White	White			
					3000K	4000K	5700K			
BOLT-60	66000	10/21W	44	TRIO	810/1665lm	900/1850lm	900/1850lm			
BOLT-120	66003	21/42W	44	TRIO	1665/3420lm	1850/3800lm	1850/3800lm			

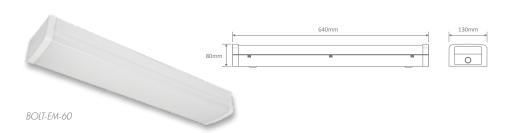

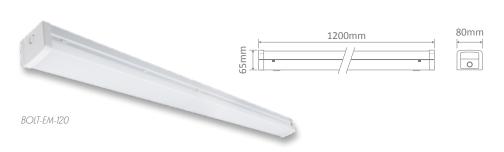

		Maxi	mum S	pacing	<sub>Js</sub> (M)											
Luminaire Classificatio		Mour	Mounting Height (M)													
Classificatio	115	2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15
C0-C180	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7
C90-C270	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6

					Lumen Output					
Item No.	Variants	Wattage	IP Rating	CCT	Warm White	Neutral White	White			
					3000K	4000K	5700K			
BOLT-60-EM	66007	10/20W	44	TRIO	900/1800lm	1000/2000lm	1000/2000lm			
BOLT-120-EM	66006	10/40W	44	TRIO	900/3600lm	1000/4000lm	1000/4000lm			

- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.



















					Lumen Output					
Item No.	Variants	Wattage	IP Rating	CCT	Warm White	Neutral White	White			
					3000K	4000K	5500K			
HYDRO-60	66012	5/20W	65	TRIO	1951lm	2195lm	2129lm			
HYDRO-120	66017	10/40W	65	TRIO	3867lm	4362lm	4212lm			

Fully complaint to AS/NZS 2293 standards Compliance: LiFePO4 battery type, 6.4V, 7 Hour Charging Time, Battery:

1.5 Hours Discharging Time

1500 mAh at 0.2 CmA Battery Capacity:

Sustained Emergency: Rated Duration: 120 Min

Classification: C0: D50, C90: D32















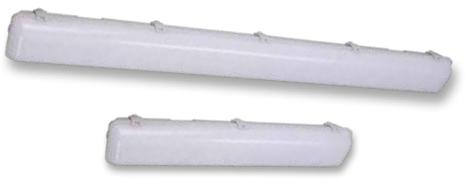



		Maxi	mum S	pacing	<sub>Js</sub> (M)											
Luminaire Classificatio		Mour	nting H	eight (	M)											
Classificatio	ΠS	2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15
C0-C180	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7
C90-C270	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6

					Lumen Output					
Item No.	Variants	Wattage	IP Rating	CCT	Warm White	Neutral White	White			
					3000K	4000K	5700K			
HYDRO-60-EM	66020	10/20W	65	TRIO	1951lm	2195lm	2129lm			
HYDRO-120-EM	66021	10/40W	65	TRIO	3867lm	4362lm	4212lm			










SHADOW-1LT Polished Copper



Stainless Steel









I. N			Variant			147	ID D	Lamp	
Item No.	Blk	Сор	Tsl	Sts	Wht	Wattage	IP Rating		
SHADOW-1-WB	49011	49014	49013	49015	49012	6W	4.5	No lamp	
SHADOW-I-WD	49016	49019	49018	49020	49017	OVV	65	GU10 TRIO	

















SHADOW-2LT Polished Copper








Exterior

Titanium Silver

Aluminium models

Stainless Steel & Copper models



I. NI			$V_{ariant}$			\A/	ID D	1
Item No.	Blk	Сор	Tsl	Sts	Wht	Wattage	IP Rating	Lamp
CITADOM 3 MB	49021	49024	49023	49025	49022	2×6W	4.5	No Lamp
SHADOW-2-WB	49026	49029	49028	49030	49027	ZXOVV	65	GU10 TRIO
















I. NI	Variant					\\/	ID D	1	
Item No.	Blk	Сор	Tsl	Sts	Wht	Wattage	IP Rating	Lamp	
SHADOW-1-ADI	49041	49044	49043	49045	49042	6W	6.5	No Lamp	
SHADOW-I-ADJ	49046	49049	49048	49050	49047	OVV	65	GU10 TRIO	

Exterior

268














Titanium Silver Black White





I N.		Variant					\A/	IP Ratina	1
It	Item No.		Сор	Tsl	Sts	Wht	Wattage	IP Kating	Lamp
CHAD	O/M 3 YDI	49051	49054	49053	49055	49052	2 6\\/	4.5	No Lamp
SHAD	ADOW-2-ADJ	49056	49059	49058	49060	49057	2×6W	65	GU10 TRIO



domuslighting.com.au

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.






















270

	Variant						Lumen Output			
Item No.	DII	D	14/1	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	Blk	Dgr	Wht				3000K	4000K	5700K	
FINN-8	22655	22656	22657	8W	65	TRIO	650lm	680lm	700lm	

**DOMUS**°

- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.






















	Vari	iant				Lumen Output			
Item No.	DII	Wht	Wattage	<b>IP</b> Rating	CCT	Warm White	Neutral White	White	
	Blk	VV ht				3000K	4000K	5700K	
ZELDA-18	22668	22669	18W	65	TRIO	1600lm	1730lm	1850lm	

**DOMUS**®

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.














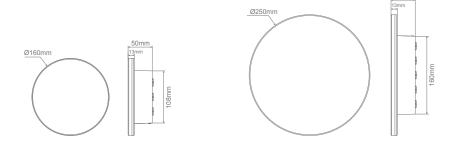

		Variant					Lumen Output			
	Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
			vv ht				3000K	4000K	5700K	
	HALO-8	22681	22682	8	65	TRIO	510lm	565lm	640lm	
	HALO-15	22683	22684	16W	65	TRIO	1000lm	1130lm	1260lm	

#### Livi Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.


















LIVI-8-WHT







95mm	Ы
93.5mm	1
•	

			Variants					Lumen Output			
	Item No.	Blk	Dar	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
		Dlk	Dgr	vv ht				3000K	4000K	5700K	
	LIVI-5	22689	22690	22691	5W	65	TRIO	340lm	365lm	390lm	
Ī	LIVI-8	22692	22693	22694	8W	65	TRIO	580lm	600lm	615lm	





## Miley 10 Series











domuslighting.com.au

113mm		120mm
	229mm	

	Var	iant				Lumen Output			
Item No.	Blk	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
	DIK	V V III				3000K	4000K	5700K	
MILEY-10	22664	22665	10W	65	TRIO	350lm	375lm	400lm	

## Alpha Series






























ALPHA-SM



ALPHA-2-WB







Item No.	Blk	Variant Alu	Wht	Wattage	IP Rating	CCT	3000K	umen Outpu 4000K	6500K
ALPHA-1-WB	19128	19130	19129	1×6W	54	TRIO	500lm	550lm	550lm
ALI TIA-1-170	19388	19396	19391	1,0 11	J .	No Lamp	N/A		
ALPHA-2-WB	19131	19133	19132	2×6W	54	TRIO	2x500lm	2x550lm	2x550lm
ALFTIA-Z-VVD	19794	19397	19797	ZXUVV	54	No Lamp		N/A	
	19134	19137	19136	4 / \\	E d	TRIO	500lm	550lm	550lm
	19808	19415	19811	1x6W	54	No Lamp		N/A	



## Piper 1 Series















## Piper 1 Series

















Exterior














192mm		100mm	192mm	100mm
	108mm			80mm

I. N	Variant			\A/	IP Ratina	CCT	Lumen Output	
Item No.	Blk	Dgr	Wht	Wattage	IP Kating	CCI	Lumen Output	
	49252	49255	49258			3000K	1100lm	
PIPER-1-RND	49251	49254	49257	1x12W	65	5000K	1100lm	
	49250	49253	49256			No Lamp	N/A	

Item No.	Variant			\A/	ID D	ССТ	
	Blk	Dgr	Wht	Wattage	IP Rating	CCT	Lumen Output
PIPER-1-SQR	49262	49265	49268	1×12W	65	3000K	1100lm
	49261	49264	49267			5000K	1100lm
	49260	49263	49266			No Lamp	N/A

Exterior

## Piper 2 Series




















Item No.	Variant			Wattage	IP Ratina	CCT	Lumen Output
	Blk	Dgr	Wht	vvattage	IP Kating	CCI	Lumen Output
PIPER-2-RND	49211	49215	49223	2x12W	65	3000K	2 x 1100lm
	49213	49217	49225			5000K	2 x 1100lm
	49210	49214	49222			No Lamp	N/A

## Piper 2 Series

- To suit LED 12W PAR-30 lamps.
- Cast Aluminium, powder coated.




















Item No.	Variant			147	ID D	ССТ	
	Blk	Dgr	Wht	Wattage	IP Rating	CCT	Lumen Output
PIPER-2-SQR	49227	49231	49239	2×12W	65	3000K	2 x 1100lm
	49229	49233	49241			5000K	2 x 1100lm
	49226	49230	49238			No Lamp	N/A





## Mojo Series






















MOJO-10

MOJO-20



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht	vvattage	ir Kating	CCI	Lumen Output
мОЈО-10	19660	19662	19664	10W	65	3000K	300lm
	19661	19663	19665			5000K	350lm
MOJO-20	19670	19672	19674	2.40\\/	65	3000K	2x300lm
	19671	19673	19675	2x10W		5000K	2x350lm



## Whisper Series


















Tempered Opal Glass, cast Aluminium backing.Inbuilt LED driver included.





Item No.	Var	iant	Wattage	IP Ratina	CCT	Lumen Output
	Blk	Wht	VVattage	IP Kating		
WHISPER-6	19680	19678	10.5W	65	3000K	290lm
	19681	19679	10.5		5000K	340lm



#### Dash Series

- Tempered Opal Glass, cast Aluminium backing.
- Inbuilt LED driver included.
- Available as Up/Down or Down only Luminaire.




















DASH-8-13-WHT







Item No.	Variant			\A/	IP Rating	CCT		
	Blk	Dgr	Wht	Wattage	IP Rating	CCI	Lumen Output	
	DASH-8	19900	19902	19904	8W	65	3000K	600lm
U.		19901	19903	19905			5000K	620lm
D	DASH-13	19942	19944	19946	13W	4.E	3000K	6100lm
DF		19943	19945	19947	13 77	65	5000K	1050lm

**DOMUS**°



### Sierra Series

- Cast Aluminium, powder coated.
- Adjustable integrated light angle slides.
- Inbuilt LED driver included.























	Item No.	Variant		Wattage	IP Ratina	CCT	Lumen Output	
	item ino.	Blk	Dgr	Wht	vvattage	ir Kating	CCI	Lumen Output
	SIERRA-12-RND	19634	19630	19632	12W	65	3000K	400lm
	SIERKA-IZ-KIND	19635	19631	19633			5000K	450lm
	SIERRA-12-SQR	19640	19636	19638	12W	65	3000K	400lm
	SIERRA-12-SQR	19641	19637	19639			5000K	450lm



# **Bell Series**

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.





















Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output	
item i vo.	Blk	Dgr	Wht	vvattage	ir Rating	CCI	Lumen Output
BELL-8	19370	19372	19374	8W	65	3000K	300lm
DELL-O	19371	19373	19375			5000K	350lm
BELL-13	19376 19378 19	19380	19380	, ,	3000K	500lm	
DELL-13	19377	19379	19381	13W	65	5000K	550lm





























# Edge Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



**Block Series** 

BLOCK-6

• Cast Aluminium, powder coated.

· Anti-glare internal reflector.


• Inbuilt LED driver included.




(240V)









	115mm	15mm
65mm	<del> </del>	35mm

domuslighting.com.au

		170mm	0
65mm		_	28mm

	Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	item 140.	Blk	Dgr	Wht	vvattage	II Rutting	CCI	Lumen Output
	EDGE-4	19692	19694	19696	4W	65	3000K	150lm
		19693	19695	19697			5000K	180lm
	EDGE 0	19684 19686 19688	19688	01.1		3000K	300lm	
	EDGE-8	19685	19687	19689	W8	65	5000K	350lm

Item No.	Variant			Wattage	IP Ratina	CCT	Lumen Output	
item ino.	Blk	Dgr	Slr	Wht	vvattage	ir Kating	CCI	Lumen Output
BLOCK-6	19544	19546	19570	19572	2x3W	65	3000K	500lm
DLOCK-0	19545	19547	19571	19573			5000K	550lm
BLOCK-12	19548	19562	19576	19578	2 ()4/	65	3000K	950lm
BLOCK-IZ	19549	19563	19577	19579	2×6W		5000K	1100lm

Exterior

Exterior

#### Kira Series

- Adjustable lens function, from a narrow 15° beam to a wide 60° beam angle.
- Tilt adjustable head in a Black, Dark Grey or White powder coated frame.
















60° to 15° Beam Angle Variation

Ø70mm





I. NI	Variant			Wattage	IP Ratina	CCT	Lumen Output
Item No.	Blk	Dgr	Wht	vvattage	IP Kating	CCI	Lumen Output
VIDA 11 ADI	20264	20268	20266	11W	65	3000K	450lm
KIRA-11-ADJ	20265	20269	20267	IIVV		5000K	470lm

**DOMUS** 

### Casa Series











• Featuring a Black, White or Dark Grey powder coated Aluminium frame with an opal diffuser or clear diffuser with internal louvres.





CASA-LOUVRE





	Item No.	Variant			Wattage	IP Ratina	I D	
- 1		Blk	Dgr	Wht	vvattage	IP Kating	Lamp Base	
	CASA	10713	10717	10716	25/4/44	E	E27	
CA	SA-LOUV	10747	10751	10750	35W Max	54	EZ/	





domuslighting.com.au

			1
	•	0	
			120mm

294

1 1	Var	iant	14/	ID D	Lamp Base	
Item No.	Blk	Dgr	Wattage	IP Rating		
CLARO	19890	19891	60W Max	65	E27	

### Como Series

• Black or Dark Grey powder coated Aluminium frame, with an opal glass enclosure to the LED module behind.

















Item No.	Variant		Wattage	IP Ratina	CCT	Lumen Output	
item ivo.	Blk	Dgr	vvattage	ir Kating	CCI	Lumen Output	
COMO-6	19882	19884	6W	65	3000K	420lm	
COMO-6	19883	19885			5000K	440lm	

**DOMUS**°













# Halo Series

- Indirect Halo effect
- Front glare reduction
















Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
CUBA-10	19880	10W	/ 5	3000K	880lm
CUDA-IU	19881	10 44	65	5000K	920lm



	<b>-</b>	Ø188mm	-
<b>*</b> *	I		
20mm		0	\
54mm			
J-4111111			
		Ø240mm	

L N	Var	iant	\A/	IP Rating	CCT	Lumen Output	
Item No.	Blk	Wht	Wattage	IP Kating	CCI		
HALO-12	19894	19898	10W	4.5	3000K	700lm	
HALO-IZ	19895	19899	10 44	65	5000K	700lm	





# LED Wall Lights

# York Series













- Cast Aluminium, powder coated, opal glass diffuser.Inbuilt LED driver included.









<u></u>	50mm	95r
IP Rating	ССТ	Lumen Out
	3000K	3501

YORK-12

I. NI		Variant		\A/	ID D	CCT		
Item No.	Blk	Dgr	Wht	Wattage	IP Rating	CCT	Lumen Outpu	
YORK-7	19648	19644	19646	7W	65	3000K	350lm	
TORK-/	19649	19645	19647	7 ٧٧	05	5000K	400lm	
YORK-12	19654	19650	19652	12W	4.5	3000K	800lm	
YORK-12 19655 1965		19651	19653	IZ VV	65	5000K	850lm	







# Zone Series













- Injection moulded polycarbonate body.
- Inbuilt LED driver included.
- Clear and frosted tempered glass fascia.



ZONE-2






Cutout: Ø68mm



ZONE-4






Cutout: 114mm x 68mm



ZONE-5



Cutout: 160mm x 68mm

domuslighting.com.au

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
ZONE 2	ZONE-2 19720		65	3000K	70lm
ZONE-Z	19721	2W	05	5000K	80lm
ZONE-4	19722	d) A /	/ [	3000K	160lm
ZONE-4	19723	4W	65	5000K	180lm
70NF F	19724	F\4/	/ 5	3000K	280lm
ZONE-5	19725	5W	65	5000K	320lm







# LED Step Lights

# Zac Series














- Cast Aluminium, powder coated.
- Inbuilt LED driver included.






ZAC-4-RND

ZAC-4-SQR





Cutout without recessed box: (Ø) 100mm Cutout with recessed box: (Ø) 110mm






Cutout without recessed box: (L) 100mm x (H) 100mm Cutout with recessed box: (L) 110mm x (H) 110mm

Item No.		Var	iant		Wattage	IP Ratina	CCT	Lumen Output	
Item INo.	Blk	Dgr	Slr	Wht	vvattage	IP Kating	CCI		
ZAC-4-12V-RND	19770	19772	19774	19776	4W	4.5	3000K	200lm	
ZAC-4-IZV-KND	19771	19773	19775	19777	4 4 4 4	65	5000K	250lm	
ZAC-4-12V-SQR	19778	19780	19782	19784	41147	/ [	3000K	200lm	
ZAC-4-12V-5QR	19779	19781	19783	19785	4W	65	5000K	250lm	

Item No.		Variant			Wattage	IP Rating	CCT		
Item INo.	Blk	Dgr	Slr	Wht	Wattage	IP Kating	CCI	Lumen Output	
ZAC-4-RND	19727	19729	19731	19733	4W	65	3000K	200lm	
ZAC-4-KND	19728	19730	19732	19734	4٧٧	0.5	5000K	250lm	
ZAC-4-SQR	19735	19737	19739	19741	4W	4.5	3000K	200lm	
ZAC-4-3QK	19736	19738	19740	19742	477	65	5000K	250lm	



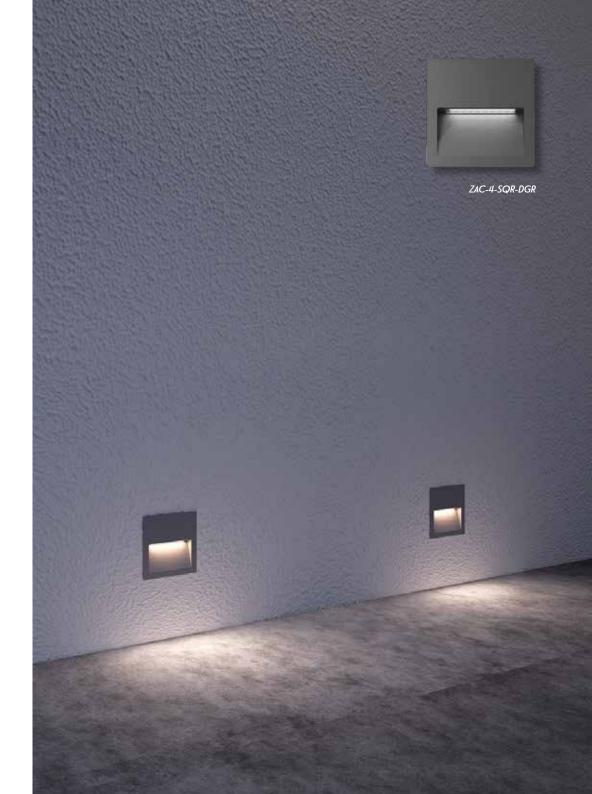



# LED Step Lights

### Zac Series














- Cast Aluminium, powder coated.
- Inbuilt LED driver included.






Cutout without recessed box: (L) 210mm x (H) 60mm Cutout with recessed box: (L) 220mm x (H) 70mm

Item No.		Vari	iant		Wattage	Voltage	IP Ratina	CCT	
	Blk	Dgr	Slr	Wht	VVattage	voitage	ir Kating	CCI	Lumen Output
ZAC-8-12V	19786	19788	19790	19792	8W	12V	4.5	3000K	300lm
ZAC-0-IZV	19787	19789	19791	19793	OVV	IZV	65	5000K	350lm

Item No.		Var	iant		Wattage	Voltage	IP Ratina	CCT	Lumen Output
Item INo.	Blk	Dgr	Slr	Wht	vvattage	Voltage	IP Kating	CCI	Lumen Output
ZAC-8	19760	19762	19764	19766	8W	2401/	4.5	3000K	300lm
ZAC-0	19761	19763	19765	19767	OVV	240V	65	5000K	350lm

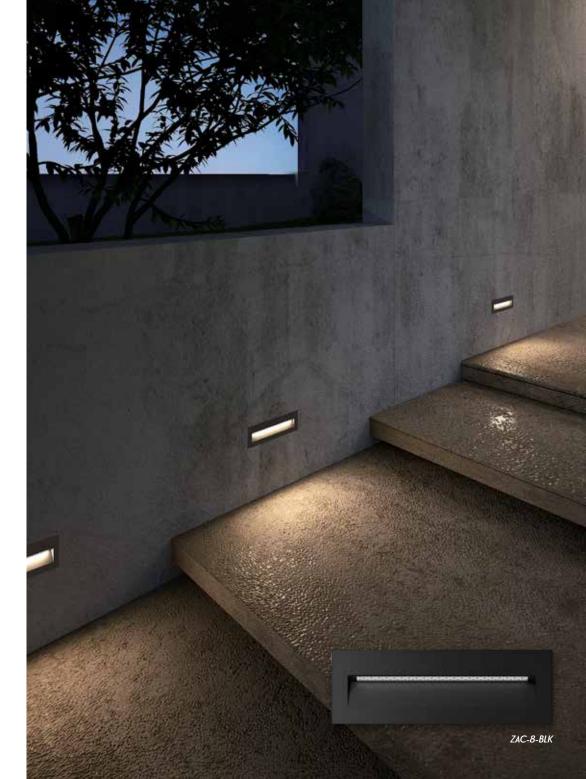

304













- Cast Aluminium, powder coated.
- Inbuilt LED driver included.











domuslighting.com.au

Item No.		Var	iant		\\/	V-1	IP Rating	CCT	Lumen Output
item ino.	Blk	Dgr	Slr	Wht		voitage	ir Kating	CCI	Lumen Output
ZEVE O 12V DND	19870	19866	19864	19868	9W	12V	65	3000K	800lm
ZEKE-9-12V-RND	19871	19867	19865	19869	9 0 0	IZ V	0.5	5000K	900lm
7FVF 0 10V COD	19878	19874	19872	19876	0)4/	401/	/ 5	3000K	800lm
ZEKE-9-12V-SQR	19879	19875	19873	19877	9W	12V	65	5000K	900lm

Item No.		Var	iant		\A/	V-1	IP Rating	CCT	Lumen Output
item ino.	Blk	Dgr	Slr	Wht	vvattage	voitage	ir Kating	CCI	Lumen Output
ZEVE O DNID	19514	19488	19486	19506	9W	240V	65	3000K	800lm
ZEKE-9-RND	19515	19489	19487	19507	7 //	Z4U V	0.5	5000K	900lm
7FVF 0 COD	19516	19492	19490	19508	0)4/	2401/	/ -	3000K	800lm
ZEKE-9-SQR	19517	19493	19491	19509	9W	240V	65	5000K	900lm

### **Zeke-4 Series**













- Cast Aluminium, powder coated. Inbuilt LED driver included.









Item No.		Var	iant		Wattage	Voltage	IP Ratina	CCT	Lumen Output
item ino.	Blk	Dgr	Slr	Wht	vvattage	voltage	ir Kating	CCI	Lumen Output
ZEVE /L 12V DND	19846	19842	19840	19844	4W	12V	65	3000K	300lm
ZEKE-4-12V-RND	19847	19843	19841	19845	4 ٧٧	IZ V	0.5	5000K	350lm
7FVF (L40V COD	19854	19850	19848	19852	41147	401/	/ -	3000K	300lm
ZEKE-4-12V-SQR	19855	19851	19849	19853	4W	12V	65	5000K	350lm

Item No.		Var	iant		Wattage	Voltage	IP Rating	CCT	Lumen Output
item 140.	Blk	Dgr	Slr	Wht	vvattage	vollage	ii itatiiig	CCI	Lumen Output
ZEKE (LDND	19526	19702	19700	19704	4W	240V	65	3000K	300lm
ZEKE-4-RND	19527	19703	19701	19705	4 ٧٧	2401	0.5	5000K	350lm
ZEKE-4-SQR	19528	19708	19706	19710	41147	2401	/ 5	3000K	300lm
ZENE-4-3QR	19529	19709	19707	19711	4W	240V	65	5000K	350lm

**DOMUS**°
















308



Item No.		Var	iant		Wattage	Voltage	IP Rating	CCT	Luman Outnut
item ino.	Blk	Dgr	Slr	Wht	vvattage	voltage	ir Kating	CCI	Lumen Output
7FVF 0 10V	19862	19858	19856	19860	8W	12V	4.5	3000K	500lm
/FKF × 1/V	19863	19859	19857	19861	OVV	1ZV	65	5000K	550lm

Item No.		Var	iant		Wattage	Voltage	IP Ratina	CCT	Lumen Output
item ino.	Blk	Dgr	Slr	Wht	vvattage	voltage	ir Kating	CCI	Lumen Output
ZEKE-8	19542	19714	19712	19716	8W	240V	65	3000K	500lm
ZENE-O	19543	19715	19713	19717	OVV	2401	05	5000K	550lm

### You Series

- Cast Aluminium powder coated.
- Inbuilt LED driver included.







Item No.


YOU-3-RND

YOU-3-SQR










Depth without recessed box: (D) 46mm Cutout without recessed box: (Ø) 70mm

### Recessed Box (Included)



Variant Wht

19985


19986

19987

19988

Blk 19989

19990 19991



IP Rating

54

54

5000K

Wattage

3W

3W

CCT	Lumen Output
3000K	200lm
5000K	220lm
3000K	200lm

220lm

Exterior








## Anodised Aluminium.

· Adjustable and Directional.





Item No.	Variant Alu	Wattage	IP Rating	CCT	Lumen Output
	19408			3000K	450lm
ELITE-1-ADJ	19409	6W	54	5000K	500lm
	19416			No Lamp	N/A

### Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- · Adjustable and Directional.

















MURO-PRO-30









	Variant						Lumen Output			
Item No.	Blk	Dgr	Wht	Wattage	IP Rating	CCT	Warm White	Neutral White	White	
							3000K	4000K	5000K	
MURO-PRO-15	25053	25054	25055	15W	54	TRIO	950lm	1050lm	1000lm	
MURO-PRO-30	25059	25060	25061	2×15W	54	TRIO	1900lm	2100lm	2000lm	

**DOMUS**°



#### Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- · Adjustable and Directional.
- PIR detection sensor (Passive Infrared Sensor)















MURO-PRO-30S













Lumen Output Variant Item No. Wattage IP Rating CCT Warm White Neutral White White Wht 3000K 4000K 5000K MURO-PRO-15S 25056 25057 25058 15W 44 TRIO 950lm 1050lm 1000lm MURO-PRO-25062 25063 25064 2×15W 44 TRIO 1900lm 2100lm 2000lm

### Flash-20 Series











- · Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- · Adjustable and Directional.



Item No.		Var	iant		Wattage	IP Rating	CCT	Lumen Output	
item ino.	Blk	Dgr	Slr	Wht	vvattage	ir rating	CCI	Lumen Output	
FLASH-20	19620	19564	19584	19586	2014/	4.5	3000K	2000lm	
FLASH-ZU	19621	19565	19585	19587	20W	65	5000K	2200lm	



domuslighting.com.au

#### **Zoom Series**

- COB LED chip.
- Filters and Hood included (Zoom-12).
- · Adjustable and Directional.





















Kira Spike



- Tilt adjustable head

















ZOOM-SPIKE-30W

Change the light effect by adding a colour filter.









Item No.	Item No. Variant Blk		IP Rating	CCT	Lumen Output	Requires
ZOOM-12	ZOOM-12 25690		67	5000K	500lm	12V DC Constant Voltage LED Driver - Wire in Parallel
ZOOM-30 25693 25695		30W	67	3000K	2124lm 2195lm	12V DC Constant Voltage LED  Driver - Wire in Parallel





60° to 15° Beam Angle Variation

# Elite Spike

# **Shadow Series**

- · Adjustable and Directional.
- Available in Black and Anodised Aluminium.





















Item No.		Variant		\A/	ID D	CCT	Lu	Lumen Output		
Item INo.	Blk	Sts	Alu	vvattage	IP Rating	CCI	3000K	4000K	6500K	
ELITE-SPIKE	19148	N/A	19147	6W	54	MR16 TRIO	500lm	550lm	550lm	
ELITE-SPIKE	19666	N/A	19499	OVV	34	No Lamp		N/A		
SHADOW 1 CDN	49071	49072	N/A	6W	65	No lamp		N/A		
SHADOW 1 GDN -	49073	49074	N/A	OVV	05	MR16 TRIO	500lm	550lm	550lm	

**DOMUS** 

Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel












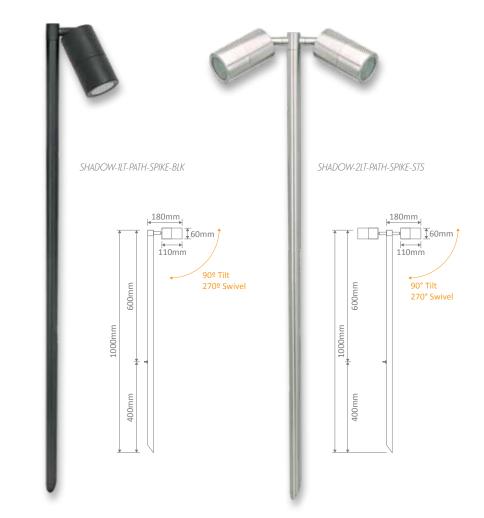

I. N	Var	iant	Wattage	IP Rating	CCT	Lumen Output			
SHADOW-1-PTH	Blk	Sts	vvattage	IP Kating	CCI	3000K	4000K	6500K	
CUADOW 1 DTU	49081	49082	6W	4.5	No lamp		N/A		
SHADOW-I-PIH	49083	49084	OVV	65	MR16 TRIO	500lm	550lm	550lm	
CHADOW 2 DTH	49086	49087	6W	4.5	No lamp		N/A		
	49088	49089	OVV	65	MR16 TRIO	500lm	550lm	550lm	

Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel












5 Pack DIY LED Deck Light kit, 5x0.6W, complete with plug and play cable and 12V DC LED Driver with flex and plug. 316 Stainless steel body with opal glass diffuser. Upgradable to maximum 10 lights by adding optional single deck light. Optional RF hand held dimmer (21100) also available upon request. Complete with 1 metre of cable per head. Note: 1.8m Flex and Plug to LED Driver. Driver to first light is 50cm, each light has 1m left and right, so max 2m spacing.

### Single Colour 5 Pack Kit





Cutout: Ø25mm

#### **RGB Colour 5 Pack Kit**







**DOMUS** 



### Single Head





Single head only to suit 5 Pack DIY LED Deck Light kit. Designed only to be used with kits to allow for extra lights to be added. 316 Stainless steel body with opal glass diffuser. Complete with 1 metre of cable per head. Must be used only with VIVID series as an additional accessory to increase the number of heads from 5 to a maximum of 10 heads.



### Single Colour Dimming Controller



Exterior

Single colour dimming controller and RF remote control to suit 5 Pack DIY LED Deck Light kit. Designed for use with Warm White and White 5 pack LED Deck light kits only. Must be used with single colour 5 Pack LED Deck Light Kits only.



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
	21101	5×0.6W	67	3000K	5x13lm
VIVID-5PK			07	5000K	5x14lm
	21103	5×0.6W	67	RGB	N/A
	21104			3000K	13lm
VIVID-1	21105	0.6W	67	5000K	14lm
	21106			RGB	N/A
VIVID-DIM	21100	N/A	N/A	N/A	N/A

# LED Inground Lights

### Deka Series

• COB LED chip.













- Anodised Aluminium or Solid Brass fascia.
- Black anodised Aluminium body.
- 60 Degrees beam angle (on open face).
- Installation cannister included.

## Open/Eyelid



DEKA-EYELID (Brass)



DEKA-1WAY (Aluminium)



1-4 Ways

DEKA-1WAY (Brass)



DEKA-EYELID (Aluminium)

DEKA-RND (Aluminium)



DEKA-RND (Brass)



DEKA-2WAY (Aluminium)



DEKA-2WAY (Brass)



DEKA-SQR (Aluminium)

320



DEKA-SQR (Brass)



DEKA-3WAY (Aluminium)



DEKA-3WAY (Brass)




DEKA-4WAY (Aluminium)



DEKA-4WAY (Brass)

# Covers: SQR, RND 1,2,3,4 Way & Eyelid



SQR, RND

1,2,3,4 Way & Eye Lid

Cutout:Ø77mm

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
DEKA BODY	19458	3W	6 E	3000K	300lm	12V DC Constant Voltage LED
DEKA BODI	19459	3 44	65	5000K	350lm	Driver — Wire in Parallel

M NIO	Variant			
MINO.	Alu	Brs		
Round Cover	19424	19438		
Square Cover	19426	19440		
Eyelid Cover	19436	19450		
1-Way	19428	19442		
2-Way	19430	19444		
3-Way	19432	19446		
4-Way	19434	19448		
	Square Cover Eyelid Cover 1-Way 2-Way 3-Way	Round Cover 19424 Square Cover 19426 Eyelid Cover 19436 1-Way 19428 2-Way 19430 3-Way 19432		

Please order this product in two parts using two codes, one for the body and another for the fascia.








Exterior

# Electromagnetic Induction


No direct cable connection from base unit to LED Light.



Induction technology passes current to LED Light through magnetic process to illuminate LED.



No more failed Inground lights from filling up with water, simply provide a 24V DC waterproof connection to the unit.



### Magneto Series

Introducing a revolutionary new design in inground lighting. The MAGNETO series from Domus features induction technology to transfer electrical current from the base pot to the light unit WITHOUT any cable connection. This avoids water syphoning through the cables and causing the LED light to prematurely fail due to moisture. Also provides for a very easy maintenance by simply unscrewing the light unit and replacing it without the need for an electrician. Ideal as a path light or inground light close to walls or columns to achieve wall washing or v-line effects. 3W 24V DC LED Inground light, 316 Stainless Steel Light Unit, optic lens diffuser. Available as a spot or flood.
























Item No.	Variant	Wattage	IP Rating	CCT	Beam Angle	Lumen Output	Requires
MAGNETO 3	21082	21082 3W 67 3000K 60°	95lm	24V DC Constant Voltage			
60D	21083	344	0/	5000K	00	93lm	LED Driver - Wire in Parallel
MAGNETO 3	21080	2).17	.7	3000K	0.50	0.51	24V DC Constant Voltage
25D	21081	3W	67	5000K	25°	95lm	LED Driver - Wire in Parallel

# Magneto Series













## Magneto Series
















Exterior








Cutout: Ø110-120mm

Ø102mm



Magneto-18-45°





Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
MAGNETO-9-45D	21086	9W	67	3000K	675lm	24V DC Constant Voltage
MAGNETO-9-45D	21088	9 44		5000K	720lm	LED Driver - Wire in Parallel

**DOMUS** 

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
111 CNETO 40 (IED	21095	18W	67	3000K	1350lm	24V DC Constant Voltage
MAGNETO-18-45D	21098	10 44	67	5000K	1450lm	LED Driver - Wire in Parallel

domuslighting.com.au

110°

#### Modula Series

- COB LED chip.
- Anodised Aluminium.
- Black anodised Aluminium body.
- 45 Degrees beam angle.
- Installation cannister included.




MODULA-9-RND




(3yr) (45) (65)

MODULA-9-SQR



Cutout: Ø110mm

326



Cutout: Ø110mm

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
MODULA-9-RND	19420	0)4/ 45		3000K	900lm	24V DC Constant Voltage
MODULA-9-KND	19421	9W	65	5000K	950lm	LED Driver - Wire in Parallel
19422	/ 5	3000K	900lm	24V DC Constant Voltage		
MODULA-9-SQR	19423	9W	65	5000K	950lm	LED Driver - Wire in Parallel

#### Versa Series

- Polycarbonate Body and Diffuser.
- IKO8 Impact rated.
- Triple wattage option.
- Inbuilt LED driver included.
- Side Conduit entry.

domuslighting.com.au




VERSA-300-PLN



(240V) (65)

VERSA-300-ELID



		Variant		Wattage			Lumen Output			
	Item No. Blk Wht (Switchable)	RII.	\A/L_4		CCT	Watt	Warm White	Neutral White	White	
		(Switchable)			3000K	4000K	5700K			
	VERSA-300-		800 19802 1			15W	1380lm	1420lm	1470lm	
	1980	19800		15W/18W/25W	TRIO	18W	1560lm	1650lm	1710lm	
	PLN					25W	2080lm	2200lm	2320lm	
	VERSA-300-					15W	830lm	850lm	880lm	
		19804 19806	15W/18W/25W	TRIO	18W	940lm	990lm	1050lm		
	EYE					25W	1250lm	1320lm	1400lm	

**DOMUS**°

Exterior

# Polyring Oval Series











- Injection Moulded Thermoplastic body.
- · Polycarbonate opal diffuser.




POLY-270-OVL-PLN




POLY-270-OVL-EYE







328



Item No.	Variant		IP Rating	Requires
item ivo.	Blk	Wht	ir Kating	Requires
POLYRING-OVL-SML-PLN	18623	18621	65	1xE27 Globe (Not Included)
POLYTING-OVL-SML-EYE	18619	18617	65	1xE27 Globe (Not Included)

# Polyring Oval Large Series



Polycarbonate Lights







- Injection Moulded Thermoplastic body. · Polycarbonate opal diffuser.





POLY-295-OVL-PLN

POLY-295-OVL-EYE





domuslighting.com.au



H H	102mm

Item No.	Blk	iant Wht	IP Rating	Requires
POLYRING-OVL-LGE-PLN	18588	18481	65	1xE27 Globe (Not Included)
POLYRING-OVL-LGE-EYE	18479	18477	65	1xE27 Globe (Not Included)





# Polyring Round Series













# • Injection Moulded Thermoplastic body.

· Polycarbonate opal diffuser.









domuslighting.com.au

Item No	Var	iant	ID D	D	
Item INo.	Blk Wht		IP Rating	Requires	
POLYRING-RND-PLAIN	18592	18590	65	1xE27 Globe	
POLIKING-KIND-PLAIN	10372	10370	05	(Not Included)	
POLYRING-RND-ELID	18475	18473	65	1xE27 Globe	
POLIKING-KND-ELID	104/3	104/3	05	(Not Included)	

# Polydome Series



Polycarbonate Lights








- Injection Moulded Thermoplastic body.
- · Polycarbonate opal diffuser.




POLYDOME-250






POLYDOME-340







POLYDOME-425

I N.		Variant		IP Rating	Requires	
Item No.	Blk	Slr	Wht	ir Kating		
POLYDOME-250	18645	18647	18643	66	1xE27 Globe (Not Included)	
POLYDOME-340	18639	18641	18637	66	1xE27 Globe (Not Included)	
POLYDOME-425	18651	18653	18649	66	2xE27 Globes (Not Included)	

**DOMUS**°





# Polyslim-270 Series












- Injection Moulded Thermoplastic body.
- · Polycarbonate opal diffuser.





I. N		Variant		IP Ratina	р.	
Item No.	Blk	Blk Slr Wh		IP Kating	Requires	
POLYSLIM-270	18631	18595	18629	65	1xE27 Globe (Not Included)	

**DOMUS** 



# Polycarbonate Lights

# Polywall Series









- Injection Moulded Thermoplastic body.
- · Polycarbonate opal sphere.

domuslighting.com.au



I. NI		Var	ID D	D .		
Item No.	Blk/Smk	Blk/Opl	Wht/Smk	Wht/Opl	IP Rating	Requires
POLYWALL-200	18616	18615	18614	18613	43	1xE27 Globe (Not Included)

# Polymount Series











#### • Injection Moulded Thermoplastic Post and Base.

• Polycarbonate Sphere.



I. N		Var	iant		ID D	Requires	
Item No.	Blk/Smk	Blk/Opl	Wht/Smk	Wht/Opl	IP Rating	Kequires	
POLYMOUNT 250	18610	18609	18612	18611	44	1xE27 Globe (Not Included)	

**DOMUS** 



## Polysphere Series







Opal






Polycarbonate Lights

- Injection Moulded Thermoplastic Base.
- · Polycarbonate Sphere.
- Designed to suit 60mm OD posts.





domuslighting.com.au

Sphere Hole Size:							
Inner Hole	Outer Hole						
92mm	99mm						
110mm	118mm						
120mm	139mm						
165mm	178mm						

Item No		iant	ID D	Requires	
Item INo.	Blk/Opl	Blk/Smk	IP Rating		
POLYSPHERE 200	18599	18600	44	1xE27 Globe (Not Included)	
POLYSPHERE 250	18601	18602	44	1xE27 Globe (Not Included)	
POLYSPHERE 300	18603	18604	44	1xE27 Globe (Not Included)	
POLYSPHERE 400	18605	18606	44	1xE27 Globe (Not Included)	



145mm

Exterior

337

### 60mm Aluminium Post Series

336







Item No.		Size				
item ino.	Blk	Grn	Slr	Bge	Wht	Size
AP-6010	10820	10822	10821	10819	10824	60x1000mm
AP-6015	10826	10828	10827	10825	10830	60x1500mm
AP-6020	10832	10834	10833	10831	10836	60x2000mm
AP-6025	10838	10840	10839	10837	10842	60x2500mm

### 76mm Aluminium Post Series





- BB-100 base can hold 60mm post internally or 76mm post externally.
- Please note that 76mm post must be mechanically fixed to base manually, as there is no provision on the post nor the base supplied. Contractor to supply screw fixings and screws and assemble.




Item No.		Variant				Size
Item INo.	Blk Grn		Wht Bge		Slr	Size
AP-7610	10850	10852	10853	10849	10851	76×1000mm
AP-7615	10855	10857	10858	10854	10856	76x1500mm
AP-7620	10860	10862	10863	10859	10861	76×2000mm
BB-100	10696	10698	10699	10695	10697	Suits 60mm & 76mm post

# BL-100

Exterior









BL-A1-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.

domuslighting.com.au

Item No.			IP Rating	D .					
Item INo.	Blk	Grn	Wht	Bge	Slr	Spare Glass	IP Kating	Requires	
BL -100	10701	10703	10704	10700	10702	10773	44	1xE27 Globe (Not Included)	
BL-A1-60	10724	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

# BL-100-1M-KIT







1168mm	

Item No.			Variant	IP Ratina	D .		
Item INo.	Blk Grn Wht Bge		Slr	IP Kating	Requires		
BL -100-1M-KIT	10729	10731	10732	10728	10730	44	1xE27 Globe (Not Included)

# BL-200







- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.



BL-A2-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.

Item No.			Variant			IP Rating	Lamp Base	
Rem 1 to:	Blk	Grn	Wht	Bge	Slr	ii nataig		
BL -200	10707	10709	10710	10706	10708	44	E27 (Lamp Not included)	
BL-A2-60	10725	N/A	N/A	N/A	N/A	N/A	N/A	

# BL-200-1M-KIT







- Cast Aluminium, powder coated.

٠	1 Metre	long,	76 <sub>mm</sub>	wide	OD	pos
---	---------	-------	------------------	------	----	-----



I. NI			Variant	IP Ratina	I D		
Item No.	Blk	Grn	Wht	Bge	Slr	IP Kating	Lamp Base
BL -200-1M-KIT	10735	10737	10738	10734	10736	44	E27 (Lamp Not included)



Ø83mm

1164mm

# BL-300

(44)









BL-A2-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.

domuslighting.com.au

Item No.			Variant			IP Rating	Lamp Base
	Blk	Grn	Wht	Bge	Slr	ii itatiiig	Edinp Dasc
BL -300	10719	10721	10722	10718	10720	44	E27 (Lamp Not included)
BL-A2-60	10725	N/A	N/A	N/A	N/A	N/A	N/A

# BL-300-1M-KIT







- Cast Aluminium, powder coated.
- 1 Metre long, 76mm wide OD post.

		W
		Ш
	Variant	

I. NI			Variant			ID D	I D
Item No.	Blk	Grn	Wht	Bge	Slr	IP Rating	Lamp Base
BL -300-1M-KIT	10741	10743	10744	10740	10742	44	E27 (Lamp Not included)

**DOMUS**®

1164mm

Ø83mm













- Cast Aluminium, powder coated.
- Clear Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-652 Wall Bracket Curved Arm




GT-654 Wall Bracket Straight Arm





105mm 245mm



122mm 176mm 50mm

310mm 410mm


GT-653 Post Bracket to suit 60mm post mounting only







domuslighting.com.au



Item No & Variant

GT-650

15800

15801

15802

15803

15805

GT-653

16016

16017

16018


16019

16020



Globe

E27



Item No	& Variant	Colour		Globe
GT-652	GT-654	Colour		Globe
15806	15812		Beige	
15807	15813		Black	
15808	15814		Burgundy	E27
15809	15815	Green		
15811	15817		White	

שכט	G1-054		
06	15812	Beige	
07	15813	Black	
80	15814	Burgundy	E27
09	15815	Green	
311	15817	White	

Traditional Exterior

Colour

Beige

Black

Burgundy

Green

White

345

Traditional Exterior

GT-657 Twin Head on Post 1.35m



GT-656 Single Head on Post 1.35m



Width per model: Single Head - 430mm Double Head - 840mm



Item No & Variant			Colour	Globe
GT-656	GT-657	,	Colour	Globe
15818	15824		Beige	
15819	15825		Black	
15820	15826		Burgundy	E27*
15821	15827	Green		
15823	15829		White	

\*The amount of globes needed will depend on the quantity of heads.






domuslighting.com.au

GT-658 Single Head on Post 1.98m





347

Item No	& Variant	,	Colour	Globe
GT-658	GT-659	(	Lolour	Globe
15830	15836		Beige	
15831	15837		Black	
15832	15838		Burgundy	E27*
15833	15839		Green	
15835	15841		White	

\*The amount of globes needed will depend on the quantity of heads.





GT-662 Twin Head on Post 2.35m



Width per model: Single Head - 430mm Double Head - 840mm Triple Head - 820mm

It	Item No & Variant				CLI
GT-660	GT-662	GT-664		Colour	Globe
15842	15848	15854		Beige	
15843	15849	15855		Black	
15844	15850	15856		Burgundy	E27*
15845	15851	15857		Green	
15847	15853	15859		White	


\*The amount of globes needed will depend on the quantity of heads.





GT-1068 Single Head on Plain Post 2.40m





It	Item No & Variant			6.1		
GT-1064	GT-1066	GT-1068	(	Colour	Globe	
15860	15866	15872		Beige		
15861	15867	15873		Black		
15862	15868	15874		Burgundy	E27*	
15863	15869	15875		Green		
15865	15871	15877		White		

\*The amount of globes needed will depend on the quantity of heads.



domuslighting.com.au





Traditional Exterior

### Lisbon Series

• Cast Aluminium, powder coated. · Polycarbonate Sphere.














GT-600 Wall Bracket (250mm Sphere)

· Made-To-Order. Production lead times apply.

GT-602 Wall Bracket (300mm Sphere)









Traditional Exterior

350










GT-606 (250mm Sphere) GT-607 (300mm Sphere) Single Head on Post 1.32m







	Item No 8	& Variant		,	Colour	Globe
GT-606	GT-607	GT-608	GT-609		olour	Globe
15674	15680	15686	15692		Beige	
15675	15681	15687	15693		Black	
15676	15682	15688	15694		Burgundy	E27*
15677	15683	15689	15695		Green	
15679	15685	15691	15697		White	

<sup>\*</sup>The amount of globes needed will depend on the quantity of heads.






GT-614 (250mm Sphere) GT-615 (300mm Sphere) Double Head on Post 1.94m



GT-612 (250mm Sphere) GT-613 (300mm Sphere) Single Head on Post 1.94m





	Item No & Variant				Colour	Globe
GT-612	GT-613	GT-614	GT-615	,	olour	Globe
15698	15704	15710	15716		Beige	
15699	15705	15711	15717		Black	
15700	15706	15712	15718		Burgundy	E27*
15701	15707	15713	15719		Green	
15703	15709	15715	15721		White	


\*The amount of globes needed will depend on the quantity of heads.





GT-618 (250mm Sphere) GT-619 (300mm Sphere) Single Head on Post 2.29m



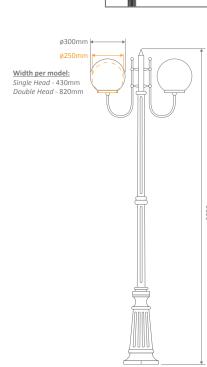

Item No & Variant		,	Colour	Globe		
GT-618	GT-619	GT-620	GT-621	,	olour	Globe
15722	15728	15734	15740		Beige	
15723	15729	15735	15741		Black	
15724	15730	15736	15742		Burgundy	E27*
15725	15731	15737	15743		Green	
15727	15733	15739	15745		White	


\*The amount of globes needed will depend on the quantity of heads.





GT-622 (250mm Sphere) GT-623 (300mm Sphere) Triple Head on Post 2.54m





Item No & Variant			CI		Globe	
GT-622	GT-623	GT-626	GT-627	Colour Gl		Globe
15746	15752	15770	15776		Beige	
15747	15753	15771	15777		Black	
15748	15754	15772	15778		Burgundy	E27*
15749	15755	15773	15779		Green	
15751	15757	15775	15781		White	


<sup>\*</sup>The amount of globes needed will depend on the quantity of heads.



GT-624 (250mm Sphere) GT-625 (300mm Sphere) Triple Head on Post 2.29m



domuslighting.com.au



Variant		C 1		
GT-624	GT-625	Colour		Globe
15758	15764		Beige	
15759	15765	Black		
15760	15766		Burgundy	3xE27
15761	15767	Green		
15763	15769		White	





Traditional Exterior


355





GT-1002 Twin Head on Plain Post 2.4m





Item No & Variant		C 1		Globe	
GT-1001	GT-1002	GT-1003	Colour		
15782	15788	15794		Beige	
15783	15789	15795		Black	F27*
15784	15790	15796		Burgundy	EZ/
15785	15791	15797		Green	
15787	15793	15799		White	

\*The amount of globes needed will depend on the quantity of heads.

### Siena Series











- Cast Aluminium, powder coated.
- · Polycarbonate Sphere.
- Made-To-Order. Production lead times apply.


GT-544 (200mm Sphere) GT-545 (250mm Sphere) Wall Bracket






GT-502 (200mm Sphere)

Wall Bracket





Item No & Variant		Colour		Globe	
GT-544	GT-545	Colour		Globe	
15566	15572	Beige			
15567	15573	Black			
15568	15574		Burgundy	1×E27	
15569	15575		Green		
15571	15577		White		

Item No & Variant	Colour		Globe
15518	Beige		
15519		Black	
15520		Burgundy	1xE27
15521		Green	
15523		White	










White

GT-530 (200mm Sphere) GT-531 (250mm Sphere) 80mm Pillar Mount






Item No	& Variant	,	~ I	Globe
GT-530	GT-531	Colour		Globe
15536	15542	Beige		
15537	15543	Black		
15538	15544	Burgundy		1xE27
15539	15545	Green		
15541	15547		White	

GT-535 (200mm Sphere) GT-536 (250mm Sphere) GT-537 (300mm Sphere) Pendant

15535

15529





Item No & Variant			CI		Globe
GT-535	GT-536	GT-537	,	Colour	
15548	15554	15560		Beige	
15549	15555	15561		Black	
15550	15556	15562		Burgundy	1xE27
15551	15557	15563		Green	
15553	15559	15565		White	



GT-553 (250mm Sphere) GT-554 (300mm Sphere) Single Sphere on Post 950mm





Item No	& Variant	C 1		Globe
GT-553	GT-554	Colour		Globe
15578	15584		Beige	
15579	15585	Black		
15580	15586	Burgundy		1xE27
15581	15587	Green		
15583	15589		White	

GT-567 (250mm Sphere) GT-568 (300mm Sphere) Twin Sphere on Post 1.1m



domuslighting.com.au



Item No	& Variant	Colour		Globe
GT-567	GT-568	Colour		Globe
15638	15644	Beige		
15639	15645	Black		
15640	15646	Burgundy		2×E27
15641	15647	Green		
15643	15649		White	

Traditional Exterior

359

**DOMUS**°



Item No	& Variant	,	^ I	Globe	
GT-555	GT-556	Colour		Globe	
15590	15596	Beige			
15591	15597	Black			
15592	15598		Burgundy	1xE27	
15593	15599		Green		
15595	15601		White		

GT-569 (250mm Sphere) GT-570 (300mm Sphere) Twin Sphere on Post 1.75m




Item No	& Variant	Colour		Globe
GT-569	GT-570	Colour		Clobe
15650	15656		Beige	
15651	15657	Black		
15652	15658		Burgundy	2×E27
15653	15659		Green	
15655	15661		White	

**DOMUS** 

GT-557 (250mm Sphere) GT-558 (300mm Sphere) Single Sphere on Post 1.96m





Var	iant	C 1		CLI	
GT-557	GT-558	Colour		Globe	
15602	15608		Beige		
15603	15609	Black			
15604	15610	Burgundy		E27	
15605	15611	Green			
15607	15613		White		

Traditional Exterior

361




Siena

GT-562 (250mm Sphere) GT-563 (300mm Sphere) Triple Spheres on Post 2.1m





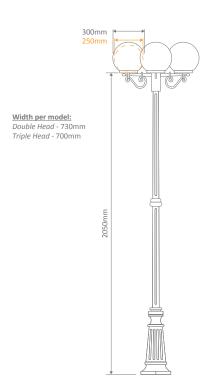

Item No & Variant				2 1	CLI	
GT-560	GT-561	GT-562	GT-563	Colour Globe		Globe
15614	15620	15626	15632		Beige	
15615	15621	15627	15633		Black	
15616	15622	15628	15634		Burgundy	E27*
15617	15623	15629	15635		Green	
15619	15625	15631	15637		White	

\*The amount of globes needed will depend on the quantity of heads.
















Vienna

- Cast Aluminium, powder coated.
- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-671 Wall Bracket Straight Arm Facing Up






Variant	Colour	Globe
15884	Beige	
15885	Black	
15886	Burgund	y 1xB22
15887	Green	
15889	White	

GT-672 Wall Bracket Straight Arm Facing Down






Variant	Colour		Globe
15890		Beige	
15891		Black	
15892		Burgundy	1×B22
15893		Green	
15895		White	



362






Variant	Colour		Globe
15956	Beige		
15957	Black		
15958	Burgundy		1×B22
15959	Green		
15961		White	

GT-1032 Wall Bracket Curved Arm Facing Down






Variant	Colour		Globe
15962	Beige		
15963	Black		
15964	Burgundy		1xB22
15965	Green		
15967		White	


GT-670 Single Pendant





Variant	Colour		Globe
15878	Beige		
15879		Black	
15880	Burgundy		1xB22
15881		Green	
15883		White	





Variant	Colour	Globe
15896	Beige	
15897	Black	
15898	Burgundy	1×B22
15899	Green	
15901	White	


GT-689 Post Top





Variant	Colour		Globe
15950		Beige	
15951		Black	
15952		Burgundy	1xB22
15953		Green	
15955		White	






Variant	(	Colour	Globe
15902		Beige	
15903		Black	
15904		Burgundy	1xB22
15905		Green	
15907		White	

GT-675 Twin Head on Post 1.46m





Variant	(	Colour	Globe
15908		Beige	
15909		Black	
15910		Burgundy	2xB22
15911		Green	
15913		White	

domuslighting.com.au





Variant	(	Colour	Globe
15914		Beige	
15915		Black	
15916	Burgundy		1xB22
15917		Green	
15919		White	

GT-677 Double Head on Post 2.08m






Variant	Colour	Globe
15920	Beige	
15921	Black	
15922	Burgundy	2×B22
15923	Green	
15925	White	

367

Variant	С	olour	Globe
15926		Beige	
15927		Black	
15928		Burgundy	1xB22
15929		Green	
15931		White	

GT-680 Twin Head on Post 2.44m






Variant	Colour		Globe
15932	Beige		
15933		Black	
15934	Burgundy		2×B22
15935		Green	
15937	White		

### GT-682 Triple Head on Post 2.44m





Variant	Colour	Globe
15938	Beige	
15939	Black	
15940	Burgundy	3xB22
15941	Green	
15943	White	

### GT-1044 Twin Curved Arm Head on Post 2.35m



Variant	Colour	Globe
15968	Be	ige
15969	Blo	ack
15970	Burg	undy 2xB22
15971	Gr	een
15973	W	nite

GT-1045 Triple Curved Arm Head on Post 2.35m



Vo	riant	Colour		Globe
15	974	Beige		
15	975	Black		
15	976	Burgundy		3×B22
15	977	Green		
15	979		White	

# Vienna Large Series












- Cast Aluminium, powder coated.
- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-691 Large Wall Bracket













Variant	Colour		Globe
15992		Beige	
15993		Black	
15994		Burgundy	1xB22
15995		Green	
15997		White	



GT-694 Large Wall Bracket Curved Arm Facing Up










372



Variant	Colour		Globe
16123		Beige	
16124		Black	
16125		Burgundy	1xB22
16126		Green	
16127		White	

Variant	Colour	Globe
16128	Beige	
16129	Black	
16130	Burgundy	1xB22
16131	Green	
16132	White	



GT-693 Large Pillar Mount



118mm
300mm 300mm
440mm

GT-690 Large Pendant

Variant	Colour	Globe
15998	Beige	
15999	Black	
16000	Burgundy	1xB22
16001	Green	
16003	White	

Variant	Colour		Globe
15980		Beige	
15981		Black	
15982		Burgundy	1xB22
15983		Green	
15985		White	

GT-696 Large Post Top





Variant	Colour	Globe
16004	Beige	
16005	Black	
16006	Burgundy	1×B22
16007	Green	
16009	White	

**DOMUS**°






#### Globe $V_{ariant}$ Colour 16010 Beige 16011 Black 16012 1xB22 Burgundy 16013 Green 16015 White

- Cast Aluminium, powder coated.
- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.


GT-131 Wall Bracket Straight Arm Facing Up







W.	. 1	CLI
Variant	Colour	Globe
14972	Beige	
14973	Black	
14974	Burgundy	1xB22
14975	Green	
14977	White	



Variant	Colour	Globe
14978	Beige	
14979	Black	
14980	Burgundy	1×B22
14981	Green	
14983	White	













GT-132 Wall Bracket


Straight Arm Facing Down



GT-1073 Wall Bracket

Curved Arm Facing Up






Variant	(	Colour	Globe
15038		Beige	
15039		Black	
15040		Burgundy	1xB22
15041		Green	
15043		White	

GT-1074 Wall Bracket Curved Arm Facing Down





Variant	Colour		Globe
15044		Beige	
15045		Black	
15046		Burgundy	1xB22
15047		Green	
15049		White	

GT-133 Pillar Mount






14984         Beige           14985         Black           14986         Burgundy           14987         Green	Variant	Colour	Globe
14986 Burgundy 1xB22 14987 Green	14984	Beige	
14987 Green	14985	Black	
	14986	Burgundy	1xB22
44000	14987	Green	
14989 White	14989	White	











Variant	Colour	Globe
15032	Beige	
15033	Black	
15034	Burguno	ly 1xB22
15035	Green	
15037	White	


Variant	Colour	Globe
14966	Beige	
14967	Black	
14968	Burgundy	1xB22
14969	Green	
14971	White	



Variant	Colour	Globe
14990	Beige	
14991	Black	
14992	Burgundy	1×B22
14993	Green	
14995	White	

GT-135 Twin Head on Post 1.49m






Variant	Colour	Globe
14996	Beige	
14997	Black	
14998	Burgund	y 2xB22
14999	Green	
15001	White	

# **DOMUS**

domuslighting.com.au






Variant	Colour	Globe
15002	Bei	ge
15003	Bla	ck
15004	Burgu	ındy 1xB22
15005	Gre	en
15007	Wh	ite

GT-137 Twin Head on Post 2.11m





Variant	Colour		Globe
15008		Beige	
15009		Black	
15010		Burgundy	2×B22
15011		Green	
15013		White	

Traditional Exterior

379



\*The amount of globes needed will depend on the quantity of heads.





**DOMUS** 

Variant	C	Colour	Globe
15014		Beige	
15015		Black	
15016		Burgundy	1xB22
15017		Green	
15019		White	




domuslighting.com	au

Traditional Exterior



382





Item No & Variant		Colour		Globe
GT-1077	GT-1078	,	olour	Globe
15050	15056		Beige	
15051	15057		Black	
15052	15058		Burgundy	B22*
15053	15059		Green	
15055	15061		White	

\*The amount of globes needed will depend on the quantity of heads.

domuslighting.com.au

# Chester Large Series

- Cast Aluminium, powder coated.
- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-161 Large Up Wall Bracket





W
*

GT-162 Large Down Wall Bracket

570mm 140mm	
350mm	

Variant	Colour		Globe	
15062		Beige		
15063		Black		
15064		Burgundy	1xB22	
15065		Green		
15067		White		

**DOMUS**°

Variant	Colour		Globe
15068		Beige	
15069		Black	
15070		Burgundy	1×B22
15071		Green	
15073		White	



GT-171 Large Wall Bracket Curved Arm Facing Up



GT-172 Large Wall Bracket Curved Arm Facing Down



380mm 655mm

384



Variant	Colour		Globe
15098		Beige	
15099		Black	
15100		Burgundy	1xB22
15101		Green	
15102		White	

Variant	Colour		Globe
15103		Beige	
15104		Black	
15105		Burgundy	1xB22
15106		Green	
15107		White	

GT-163 Large Pillar Mount





Variant	Colour	Globe
15074	Beig	е
15075	Blac	k
15076	Burgui	ndy 1xB22
15077	Gree	en
15079	Whit	te

GT-166 Large Post Top






Variant	Colour	Globe
15086	Beige	
15087	Black	
15088	Burgundy	1×B22
15089	Green	
15091	White	

GT-165 Large Pendant






Variant	Colour	Globe
15080	Beige	
15081	Black	
15082	Burgundy	/ 1 <sub>x</sub> B22
15083	Green	
15085	White	









Variant	С	olour	Globe
15092		Beige	
15093		Black	
15094		Burgundy	1×B22
15095		Green	
15097		White	

# Paris Series



- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.


GT-231 Wall Bracket












Variant	Colour	Globe
15116	Beige	
15117	Black	
15118	Burgund	1xB22
15119	Green	
15121	White	

domuslighting.com.au

Variant	Colour	Globe
15122	Beig	ge
15123	Blac	sk
15124	Burgu	ndy 1xB22
15125	Gre	en
15127	Whi	te



Variant	Colour		Globe
15128		Beige	
15129		Black	
15130		Burgundy	1xB22
15131		Green	
15133		White	

GT-249 Post Top






Variant	Colour		Globe
15182		Beige	
15183		Black	
15184	Bu	ırgundy	1xB22
15185		Jreen	
15187	\	White	

GT-230 Pendant






Variant	Colour	Globe
15110	Beige	
15111	Black	
15112	Burgundy	1xB22
15113	Green	
15115	White	

domuslighting.com.au

### GT-245 Wall Mounted





Variant	Colour	Globe
15176	Beige	
15177	Black	
15178	Burgundy	1xE27
15179	Green	
15181	White	

GT-234 Single Head on Post 1.31m



Variant	Colour		Globe
15134		Beige	
15135		Black	
15136		Burgundy	1xB22
15137		Green	
15139		White	





388



(	Colour	Globe
	Beige	
	Black	
	Burgundy	2xB22
	Green	
	White	
	(	Black Burgundy Green

GT-236 Single Head on Post 1.94m





Variant	(	Colour	Globe
15146		Beige	
15147		Black	
15148		Burgundy	1xB22
15149		Green	
15151		White	

domuslighting.com.au


### GT-237 Twin Head on Post 2.09m



Variant	C	Colour	Globe
15152		Beige	
15153		Black	
15154		Burgundy	2×B22
15155		Green	
15157		White	

GT-238 Single Head on Post 2.3m






Variant	Colour	Globe
15158	Beige	
15159	Black	
15160	Burgundy	1×B22
15161	Green	
15163	White	

domuslighting.com.au

Traditional Exterior

391





Itam No.	& Variant			
GT-240	GT-242	(	Colour	Globe
15164	15170		Beige	
15165	15171		Black	
15166	15172		Burgundy	B22*
15167	15173		Green	
15169	15175		White	

\*The amount of globes needed will depend on the quantity of heads.

# Avignon Series



- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-271 Wall Bracket











Variant	(	Colour	Globe
15194		Beige	
15195		Black	
15196		Burgundy	1xB22
15197		Green	
15199		White	

domuslighting.com.au

Variant	Colour	Globe
15200	Beige	
15201	Black	
15202	Burgundy	1xB22
15203	Green	
15205	White	

Traditional Exterior



Variant	Colour	Globe
15206	Beige	
15207	Black	
15208	Burgundy	1xB22
15209	Green	
15211	White	

GT-289 Post Top






Variant	Colour	Globe
15254	Beige	
15255	Black	
15256	Burgundy	1xB22
15257	Green	
15259	White	

GT-270 Pendant





Variant	Colour	Globe
15188	Beig	е
15189	Blac	<
15190	Burgur	ndy 1xB22
15191	Gree	n
15193	Whit	e

# **DOMUS**°

domuslighting.com.au

## GT-274 Single Head on Post 1.25m






Variant	Colour	Globe
15212	Beige	
15213	Black	
15214	Burgundy	1xB22
15215	Green	
15217	White	

GT-275 Twin Head on Post 1.4m





Variant	Colour		Globe
15218		Beige	
15219		Black	
15220		Burgundy	2×B22
15221		Green	
15223		White	

domuslighting.com.au

GT-276 Single Head on Post 1.9m



Variant	Colour	Globe
15224	Beige	
15225	Black	
15226	Burgundy	1xB22
15227	Green	
15229	White	

GT-277 Twin Head on Post 2.05m



(	Colour	Globe
	Beige	
	Black	
	Burgundy	2×B22
	Green	
	White	
		Black Burgundy Green





4		215mm
,	_	


Variant	Colour	Globe
15236	Beige	
15237	Black	
15238	Burgundy	1×B22
15239	Green	
15241	White	







Width per model: Double Head - 640mm Triple Head - 620mm



Item No	& Variant		Colour	Globe
GT-280	GT-282	Colour		Globe
15242	15248		Beige	
15243	15249		Black	
15244	15250		Burgundy	B22*
15245	15251		Green	
15247	15253		White	

\*The amount of globes needed will depend on the quantity of heads.

# **Turin Series**



- · Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

GT-421 Wall Bracket












Variant	Colour	Globe
15416	Beige	
15417	Black	
15418	Burgundy	1×B22
15419	Green	
15421	White	

domuslighting.com.au

**DOMUS**°

Variant	(	Colour	Globe
15422		Beige	
15423		Black	
15424		Burgundy	1xB22
15425		Green	
15427		White	





Variant	C	olour	Globe
15428		Beige	
15429		Black	
15430		Burgundy	1xB22
15431		Green	
15/133		White	

GT-439 Post Top






Variant	Colour	Globe
15476	Beige	
15477	Black	
15478	Burgundy	1xB22
15479	Green	
15481	White	

GT-420 Pendant






Variant	Colour	Globe
15410	Beige	
15411	Black	
15412	Burgundy	1xB22
15413	Green	
15415	White	

domuslighting.com.au

GT-424 Single Head on Post 1.32m





Variant	Colour	Globe
15434	Beige	
15435	Black	
15436	Burgundy	/ 1xB22
15437	Green	
15439	White	

GT-425 Twin Head on Post 1.49m





Variant	Colour	Globe
15440	Beige	
15441	Black	
15442	Burgundy	2xB22
15443	Green	
15445	White	


domuslighting.com.au

400

Colour	Globe
Beige	
Black	
Burgundy	1xB22
Green	
White	
	Beige Black Burgundy Green

GT-427 Twin Head on Post 2.11m






Colour	
Beige	
Black	
Burgundy	
Green	
White	
	Beige Black Burgundy Green

GT-428 Single Head on Post 2.37m





Variant	Colour	Globe
15458	Beige	
15459	Black	
15460	Burgundy	1xB22
15461	Green	
15463	White	

402


domuslighting.com.au

405









Item No & Variant			Colour	Globe
GT-430	GT-432	Cotour		Clobe
15464	15470		Beige	
15465	15471		Black	
15466	15472		Burgundy	B22*
15467	15473		Green	
15469	15475		White	

\*The amount of globes needed will depend on the quantity of heads.

# Turin Large Series











- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.

GT-481 Large Wall Bracket






Variant	(	Colour	Globe
15482		Beige	
15483		Black	
15484		Burgundy	1xB22
15485		Green	
15487		White	

### GT-482 Large Wall Bracket





Variant	Colour		Globe
15488	Beige		
15489		Black	
15490	Burgundy		1xB22
15491		Green	
15493		White	



GT-492 Up Large Curved Wall Bracket










Variant	Colour	Globe
16133	Beige	
16134	Black	
16135	Burgundy	1xB22
16136	Green	
16137	White	

Variant	Colour	Globe
16138	Beige	
16139	Black	
16140	Burgundy	1xB22
16141	Green	
16142	White	

domuslighting.com.au

### GT-483 Large Pillar Mount





Variant	Colour	Globe
15494	Beige	e
15495	Black	c
15496	Burgun	dy 1xB22
15497	Gree	n
15499	White	e

GT-486 Large Post Top






Variant	Colour	Globe
15506	Beige	
15507	Black	
15508	Burgundy	1xB22
15509	Green	
15511	White	

GT-485 Large Pendant






Variant	Colour	Globe
15500	Beige	
15501	Black	
15502	Burgundy	1×B22
15503	Green	
15505	White	







Traditional Exterior



Variant	Colour	Globe
15512	Beige	
15513	Black	
15514	Burgundy	1xB22
15515	Green	
15517	White	

## **Mounting Adaptors**







GTA-96 Pillar Mount Base



GTA-832 Base & Adaptor Plate









Item No & Variant					Colour
GTA-95 GTA-96 GTA-832 GTA-833		olour			
16075	16081	16063	16144		Beige
16076	16082	16064	16145		Black
16077	16083	16065	16146		Burgundy
16078	16084	16066	16147		Green
16080	16086	16068	16148		White

## Post Top Adaptors












GTA-150, 151, 152 GTA-142 60mm (76mm, 80mm, 82mm)

	Item No & Variant						~
GTA-140	GTA-141	GTA-142	GTA-150	GTA-151	GTA-152	Colour	
16021	16027	16033	16103	16113	16119		Beige
16022	16028	16034	16104	16114	16120		Black
16023	16029	16035	16105	16115	16121		Burgundy
16024	16030	16036	16106	16116	16122		Green
16026	16032	16038	16102	16112	16118		White






GTA-72 Monaco Series Diffuser Ring





GTA-652 Monaco Series Diffuser Only






410


GTA-94 Thread Adaptor Plate








**GTA-222 GTA-221 GTA-220** 95cm Post 1.57m Post 1.93m Post






GTA-222-221 (Base)

GTA-220 (Base)



GTA-335 Exterior Arm





GTA-98 Cap to Suit 60mm Post

Item No	& Variant	CI			
GTA-335	GTA-98	Colour			
16057	N/A		Beige		
16058	16087		Black		
16059	N/A		Burgundy		
16060	N/A		Green		
16062	16088		White		













• 12V DC Constant Voltage.















Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP12/10	20198			1-10W	/7
WP12/15	20200	200-260V	401/	1.5-15W	
WP12/30	20201	(50/60Hz)	12V	3-30W	67
WP12/60	20202			6-60W	


Constant Voltage - Wire in Parallel
















Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP12/100	20203			10-100W	
WP12/150	20204	200-260V	40\/	15-150W	67
WP12/200	20199	(50/60Hz)	12V	20-200W	
WP12/250	20259			25-250W	

Constant Voltage - Wire in parallel



Power Supplies

# WP-24V Series















• 24V DC Constant Voltage.
















Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP24/10	20249			1-10W	
WP24/15	20250	200-260V (50/60Hz)	24V	1.5-15W	47
WP24/30	20251		241	3-30W	67
WP24/60	20252			6-60W	

Constant Voltage - Wire in parallel














Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating	
WP24/100	20253			10-100W		
WP24/150	20254	200-260V	24114	15-150W	/7	
WP24/200	20257	(50/60Hz)	24V	20-200W	67	
WP24/250	20258			25-250W		

Constant Voltage - Wire in parallel



Power Supplies



### WP-350mA Series












350mA Constant Current.





### WP-700mA Series

700mA Constant Current.
















Item No.	Variant	Input Voltage	Output Voltage	Output Current	Wattage	IP Rating
WP350MA/3	20248	200-260V AC (50/60Hz)	7-9V		2.5 -3W	
WP350MA/10	20255		26-30V	350mA	9-10W	47
WP350MA/20	20260		40-57V		14-20W	
WP700MA/3	20393		3-5V		2-3W	67
WP700MA/10	20395		12-15V	700mA	8.5-10W	
WP700MA/20	20256		25-30V		17.5-20W	

Constant Current - Wire in Series





#### 1. Definitions

- 1.1 "Domus" means Domus Lighting Pty Ltd, its successors and assigns or any person acting on behalf of and with the authority of Domus Lighting Pty Ltd.
- 1.2 "Customer" means the person/s buying the Goods as specified in any invoice, document or order, and if there is more than one Customer is a reference to each Customer jointly and severally.
- 1.3 "Goods" means all Goods or Services supplied by Domus to the Customer at the Customer's request from time to time (where the context so permits the terms 'Goods' or 'Services' shall be interchangeable for the other).
- 1.4 "Price" means the Price payable (plus any GST where applicable) for the Goods as agreed between Domus and the Customer in accordance with clause 6 below.
- 1.5 "GST" means Goods and Services Tax as defined within the "A New Tax System (Goods and Services Tax) Act 1999".

### 2. Acceptance

- 2.1 The Customer is taken to have exclusively accepted and is immediately bound, jointly and severally, by these terms and conditions if the Customer places an order for or accepts delivery of the Goods.
- 2.2 These terms and conditions may only be amended with the consent of both parties in writing, and shall prevail to the extent of any inconsistency with any other document or agreement between the Customer and Domus.
- 2.3 Goods are supplied by Domus only on the terms and conditions of trade herein to the exclusion of anything to the contrary in the terms of the Customer's order.

#### 3. Electronic Transactions Act 2000

3.1 Electronic signatures shall be deemed to be accepted by either party providing that the parties have complied with Section 9 of the Electronic Transactions Act 2000 or any other applicable provisions of that Act or any Regulations referred to in that Act.

#### 4. Change in Control

4.1 The Customer shall give Domus not less than fourteen (14) days prior written notice of any proposed change of ownership of the Customer and/or any other change in the Customer's details (including but not limited to, changes in the Customer's name, address, contact phone or fax number/s, or business practice). The Customer shall be liable for any loss incurred by Domus as a result of the Customer's failure to comply with this clause.

### 5. Sales Targets and Settlement Rebates

- 5.1 Any agreed sales targets and/or settlement rebates are subject to specific agreed conditions, with all agreements to be documented by Domus and signed by both parties. Rebates shall be granted as per the agreed terms.
- 5.2 Where the Customer fails to adhere to the agreed terms, Domus reserves the right to withdraw, cancel and/or modify the rebate structure.

### 6. Price and Payment

- 6.1 At Domus' sole discretion, the Price shall be either:
  - (a). as indicated on any invoice provided by Domus to the Customer; or
  - (b). the Price as at the date of delivery of the Goods according to Domus' current price list, with any claims of incorrect pricing to be made within thirty (30) days of delivery; or
  - (c). Domus' quoted price (subject to clause 6.2) which will be valid for the period stated in the quotation or otherwise for a period of thirty (30) days. Domus reserves the right to withdraw or change a quotation without notice prior to acceptance.
- 6.2 Domus reserves the right to change the Price:
  - (a). if a variation to the Goods which are to be supplied is requested (including any applicable plans or specifications); or
  - (b). in the event of increases to Domus in the cost of labour or materials (including, but not limited to, overseas transactions that may increase as a consequence of variations in foreign currency rates of exchange and/or international freight and insurance charges) which are beyond Domus' control.
- 6.3 Variations will be charged for on the basis of Domus' quotation, and will be detailed in writing, and shown as variations on Domus' invoice. The Customer shall be required to respond to any variation submitted by Domus within ten (10) working days. Failure to



- do so will entitle Domus to add the cost of the variation to the Price. Payment for all variations must be made in full at the time of their completion.
- 6.4 Time for payment for the Goods being of the essence, the Price will be payable by the Customer on the date/s determined by Domus, which may be:
  - (a). on delivery of the Goods;
  - (b). either thirty (30) days or sixty (60) days as per prior arrangement, following the end of the month, in which a statement is emailed or posted to the Customer's address notices;
  - (c). the date specified on any invoice or other form as being the date for payment; or
  - (d). failing any notice to the contrary, the date which is seven (7) days following the date of any invoice given to the Customer by
- 6.5 Payment may be made by cash, cheque, bank cheque, electronic/on-line banking, credit card (Visa or MasterCard only) a surcharge of up to one and a half percent (1.5%) will apply per transaction on all credit card payments, or by any other method as agreed to between the Customer and Domus.
- 6.6 The Customer shall not be entitled to set off against, or deduct from the Price, any sums owed or claimed to be owed to the Customer by Domus nor to withhold payment of any invoice because part of that invoice is in dispute.
- 6.7 Unless otherwise stated the Price does not include GST. In addition to the Price the Customer must pay to Domus an amount equal to any GST Domus must pay for any supply by Domus under this or any other agreement for the sale of the Goods. The Customer must pay GST, without deduction or set off of any other amounts, at the same time and on the same basis as the Customer pays the Price. In addition, the Customer must pay any other taxes and duties that may be applicable in addition to the Price except where they are expressly included in the Price.

#### 7. Delivery of Goods

- 7.1 Delivery ("Delivery") of the Goods is taken to occur at the time that:
  - (a). the Customer or the Customer's nominated carrier takes possession of the Goods at Domus' address; or
  - (b). Domus (or Domus' nominated carrier) delivers the Goods to the Customer's nominated address even if the Customer is not present at the address.
- 7.2 At Domus' sole discretion, the cost of delivery shall be:
  - (a). all purchase orders over three hundred dollars (\$300) including GST are free into store (FIS) within Australian Capital cities and Domus' nominated Regional centres, excluding NT and WA;
  - (b). all purchase orders under three hundred dollars (\$300) including GST, will incur a minimum delivery/freight charge of twenty dollars (\$20) plus GST.
  - (c). Custom profile orders over 3 metres in length, will incur an additional Freight & Handling charge.
- 7.3 For all areas outside Australian Capital cities and Domus' nominated Regional centres, Domus shall reserve the right to quote and charge a delivery/freight charge that represents the true cost of freight for the requested purchase order, or the Customer may nominate their own carrier and costs accepted by the Customer.
- 7.4 Any time specified by Domus for Delivery is an estimate only and Domus will not be liable for any loss or damage incurred by the Customer as a result of any delay. However, both parties agree that they shall make every endeavour to enable the Goods to be supplied at the time and place as was arranged between both parties. In the event that Domus is unable to supply the Goods as agreed solely due to any action or inaction of the Customer, then:
  - (a). any change in the date of Delivery will be accommodated to the extent that Domus is able to accommodate it, but in the event the change necessitates any variation under clause 6.2, the extra expenses will be charged to the Customer; and/or
  - (b). Domus shall be entitled to charge a reasonable fee for re-supplying the Goods at a later time and date.
- 7.5 Domus may deliver the Goods in separate instalments. Each separate instalment shall be invoiced and paid in accordance with the provisions in these terms and conditions.
- 7.6 The Customer warrants that any structures to which the Goods are to be affixed are able to withstand the installation thereof, and that any electrical connections (including, but not limited to, meter boxes, main switches, circuit breakers, and electrical cable) are of suitable capacity to handle the Goods once installed.

#### 8. Risk

# **DOMUS**



# Terms and Conditions

- 8.1 Risk of damage to or loss of the Goods passes to the Customer on Delivery and the Customer must insure the Goods on or before Delivery.
- 8.2 If any of the Goods are damaged or destroyed following delivery but prior to ownership passing to the Customer, Domus is entitled to receive all insurance proceeds payable for the Goods. The production of these terms and conditions by Domus is sufficient evidence of Domus' rights to receive the insurance proceeds without the need for any person dealing with Domus to make further enquiries.
- 8.3 If the Customer requests Domus to leave Goods outside Domus' premises for collection or to deliver the Goods to an unattended location, then such Goods shall be left at the Customer's sole risk.

### 9. Specifications

- 9.1 Whilst Domus shall endeavour to provide correct and accurate information in all datasheets, catalogues, brochures, instruction manuals, advertising materials and other documentation, all literature, is expressly illustrative and is by way of a general description of the Goods and Domus shall not be held liable where errors and/or omissions may occur.
- 9.2 The Customer shall be responsible for ensuring that the Goods ordered are suitable for their intended use, as in some instances the Goods are made to order and Domus offers no refund, either partial or fully, in the event of any cancellation by the Customer.
- 9.3 The Customer acknowledges and accepts that the supply of Goods for accepted orders may be subject to availability and if, for any reason, Goods are not, or cease to be, available, Domus reserves the right to substitute comparable products (or components thereof) and vary the Price as per clause 6.2. In all such cases Domus will notify the Customer in advance of any such substitution, and also reserves the right to place the Customer's order on hold until such time as Domus and the Customer agree to such changes.

#### 10. Title

- 10.1 Domus and the Customer agree that ownership of the Goods shall not pass until:
  - (a). the Customer has paid Domus all amounts owing to Domus; and
  - (b). the Customer has met all of its other obligations to Domus.
- 10.2 Receipt by Domus of any form of payment other than cash shall not be deemed to be payment until that form of payment has been honoured, cleared or recognised.
- 10.3 It is further agreed that, until ownership of the Goods passes to the Customer in accordance with clause 10.1:
  - (a). the Customer is only a bailee of the Goods and must return the Goods to Domus on request.
  - (b). the Customer holds the benefit of the Customer's insurance of the Goods on trust for Domus and must pay to Domus the proceeds of any insurance in the event of the Goods being lost, damaged or destroyed.
  - (c). the Customer must not sell, dispose, or otherwise part with possession of the Goods other than in the ordinary course of business and for market value. If the Customer sells, disposes or parts with possession of the Goods then the Customer must hold the proceeds of any such act on trust for Domus and must pay or deliver the proceeds to Domus on demand.
  - (d). the Customer should not convert or process the Goods or intermix them with other goods but if the Customer does so then the Customer holds the resulting product on trust for the benefit of Domus and must sell, dispose of or return the resulting product to Domus as it so directs.
  - (e). the Customer irrevocably authorises Domus to enter any premises where Domus believes the Goods are kept and recover possession of the Goods.
  - (f). Domus may recover possession of any Goods in transit whether or not delivery has occurred.
  - (g). the Customer shall not charge or grant an encumbrance over the Goods nor grant nor otherwise give away any interest in the Goods while they remain the property of Domus.
  - (h). Domus may commence proceedings to recover the Price of the Goods sold notwithstanding that ownership of the Goods has not passed to the Customer.

### 11. Personal Property Securities Act 2009 ("PPSA")

- 11.1 In this clause financing statement, financing change statement, security agreement, and security interest has the meaning given to it by the PPSA.
- 11.2 Upon assenting to these terms and conditions in writing the Customer acknowledges and agrees that these terms and conditions





constitute a security agreement for the purposes of the PPSA and creates a security interest in all Goods and/or collateral (account) – being a monetary obligation of the Customer to Domus for Services – that have previously been supplied and that will be supplied in the future by Domus to the Customer.

#### 11.3 The Customer undertakes to:

- (a). promptly sign any further documents and/or provide any further information (such information to be complete, accurate and up-to-date in all respects) which Domus may reasonably require to;
- register a financing statement or financing change statement in relation to a security interest on the Personal Property Securities Register;
- (ii). register any other document required to be registered by the PPSA; or
- (iii). correct a defect in a statement referred to in clause 11.3(a)(i) or 11.3(a)(ii);
- (b). indemnify, and upon demand reimburse, Domus for all expenses incurred in registering a financing statement or financing change statement on the Personal Property Securities Register established by the PPSA or releasing any Goods charged thereby:
- (c). not register a financing change statement in respect of a security interest without the prior written consent of Domus;
- (d). not register, or permit to be registered, a financing statement or a financing change statement in relation to the Goods and collateral (account) in favour of a third party without the prior written consent of Domus;
- (e). immediately advise Domus of any material change in its business practices of selling the Goods which would result in a change in the nature of proceeds derived from such sales.
- 11.4 Domus and the Customer agree that sections 96, 115 and 125 of the PPSA do not apply to the security agreement created by these terms and conditions.
- 11.5 The Customer waives their rights to receive notices under sections 95, 118, 121(4), 130, 132(3)(d) and 132(4) of the PPSA.
- 11.6 The Customer waives their rights as a grantor and/or a debtor under sections 142 and 143 of the PPSA.
- 11.7 Unless otherwise agreed to in writing by Domus, the Customer waives their right to receive a verification statement in accordance with section 157 of the PPSA.
- 11.8 The Customer must unconditionally ratify any actions taken by Domus under clauses 11.3 to 11.5.
- 11.9 Subject to any express provisions to the contrary (including those contained in this clause 11) nothing in these terms and conditions is intended to have the effect of contracting out of any of the provisions of the PPSA.

#### 12. Security and Charge

- 12.1 In consideration of Domus agreeing to supply the Goods, the Customer charges all of its rights, title and interest (whether joint or several) in any land, realty or other assets capable of being charged, owned by the Customer either now or in the future, to secure the performance by the Customer of its obligations under these terms and conditions (including, but not limited to, the payment of any money).
- 12.2 The Customer indemnifies Domus from and against all Domus' costs and disbursements including legal costs on a solicitor and own client basis incurred in exercising Domus' rights under this clause.
- 12.3 The Customer irrevocably appoints Domus and each director of Domus as the Customer's true and lawful attorney/s to perform all necessary acts to give effect to the provisions of this clause 12 including, but not limited to, signing any document on the Customer's behalf.

#### 13. Damaged/Faulty Goods, Warranties and Returns and Claims, Competition and Consumer Act 2010 (CCA)

- 13.1 The Customer must inspect the Goods on delivery and must within seven (7) days of delivery notify Domus in writing of any evident defect/damage, shortage in quantity, or failure to comply with the description or quote. The Customer must notify any other alleged defect in the Goods as soon as reasonably possible after any such defect becomes evident. Upon such notification the Customer must allow Domus to inspect the Goods. A Goods Returned Authority number (GRA) will be issued by Domus upon notification of Goods to be returned and shall accompany the Goods along with all other relevant documentation and a completed Warranty Claim Form.
- 13.2 The conditions applicable to the warranty given by clause 13.1 are as specified below:
  - (a). Damaged/Faulty Goods: Domus, in its absolute discretion, agrees to repair or replace or credit Goods that have been approved by Domus to be defective and in accordance with 13.1 and any instructions issued by Domus. Please note Credit



# Terms and Conditions

- Notes are only valid for twelve (12) months from date of issue. Suitable substitutes will be issued by Domus in the case where the product is discontinued or no longer serviceable;
- (b). Warranties: no warranties except those implied and which cannot be excluded by law are given by Domus in respect of Goods and Services. Warranty periods vary, subject to the individual product, and negotiated warranty periods may apply to Services. Any product(s) that have been modified shall render all warranties null and void;
- (c). Shortages: claims for "short deliveries" must be reported to Domus in writing within seven (7) days of delivery of Goods and in accordance with 13.1, no claims for short deliveries will be accepted after this time. The Customer will be responsible insuring that the total number of cartons delivered corresponds exactly with the delivery docket and/or the couriers consignment note;
- (d). Pricing: claims for "incorrect pricing" must be reported to Domus in writing within fourteen (14) days of delivery of Goods and/ or date of invoice. Domus reserves the right to reject any pricing claim submitted after fourteen (14) days of delivery of Goods and/or date of invoice.
- (e). Goods not Required by the Customer: Domus may in its absolute discretion accept non-defective Goods (excluding specials, project or discontinued Goods) for return in which case Domus may require the Customer to pay handling fees of up to twenty five percent (25%) of the value of the returned Goods plus any freight costs and provide the GRA number and all other relevant documents pertaining to the Goods.
- 13.3 Under applicable State, Territory and Commonwealth Law (including, without limitation the CCA), certain statutory implied guarantees and warranties (including, without limitation the statutory guarantees under the CCA) may be implied into these terms and conditions (Non-Excluded Guarantees).
- 13.4 Except as expressly set out in these terms and conditions or in respect of the Non-Excluded Guarantees, Domus makes no warranties or other representations under these terms and conditions including but not limited to the quality or suitability of the Goods. Domus' liability in respect of these warranties is limited to the fullest extent permitted by law.
- 13.5 If the Customer is a consumer within the meaning of the CCA in respect of any expressed warranties and guarantees, Domus' liability is limited to the extent permitted by section 64A of Schedule 2 and being either for a twelve (12) month, three (3) year or five (5) year period. For commercial applications, goods will only be warranted for a period of twelve (12) months only.
- 13.6 If Domus is required to replace the Goods under this clause or the CCA, but is unable to do so, Domus may refund any money the Customer has paid for the Goods.
- 13.7 If the Customer is not a consumer within the meaning of the CCA, Domus' liability for any defect or damage in the Goods is:
  - (a). limited to the value of any express warranty or warranty documentation provided to the Customer by Domus at Domus' sole discretion:
  - (b). limited to any warranty to which Domus is entitled, if Domus did not manufacture the Goods;
  - (c). otherwise negated absolutely.
- 13.8 At no time will a warranty be transferrable. Any warranty offered is made only to the original Customer who must produce the original sales invoice at the point of submitting a warranty claim.
- 13.9 Subject to this clause 13, returns will only be accepted provided that:
  - (a). the Customer has complied with the provisions of clause 13.1; and
  - (b). Domus has agreed that the Goods are defective; and
  - (c). the Customer has obtained a CRA number from Domus; and
  - (d). the Goods are returned within a reasonable time at the Customer's reasonable cost; and
  - (e). the Goods are returned in the condition in which they were delivered and with all packaging material, brochures and instruction material in as new condition as is reasonably possible in the circumstances.
- 13.10 Not with standing clauses 13.1 to 13.8 but subject to the CCA, Domus shall not be liable for any defect or damage which may be caused or partly caused by or arise as a result of:
  - (a). the Customer failing to properly maintain or store any Goods;
  - (b). the Customer using the Goods for any purpose other than that for which they were designed;
  - (c). the Customer continuing the use of any Goods after any defect became apparent or should have become apparent to a reasonably prudent operator or user;
  - (d). the Customer failing to follow any instructions or guidelines provided by Domus;
  - (e). fair wear and tear, any accident, or act of God.
- 13.11 Not with standing anything contained in this clause if Domus is required by a law to accept a return then Domus will only accept a







return on the conditions imposed by that law.

### 14. Third Party Claims

- 14.1 In the instance that Domus' Goods have been installed and then become defective, Domus shall not be responsible for any electrical costs involved. The defective Goods shall be returned to Domus in accordance with 13.1.
- 14.2 In the instance that Domus' Goods are agreed by Domus as defective on a commercial job, Domus reserves the right either reject or to use the following procedures to remedy and rectify the situation. Domus may:
  - (a). use Domus' qualified staff and resources; or
  - (b). obtain a quotation for the remedial/rectification work to be completed on Domus' behalf, with the quotation to be signed off by Domus' management prior to commencement of the said work and a work order being issued.
- 14.3 Failure of the Customer to meet all the procedure in 14.2 to occur may result in Domus not accepting any back charge claim made by the Customer.

#### 15. Intellectual Property

- 15.1 Where Domus has designed, drawn or developed Goods for the Customer, then the copyright in any designs and drawings and documents shall remain the property of Domus. Under no circumstances may such designs, drawings and documents be used without the express written approval of Domus.
- 15.2 The Customer warrants that all designs, specifications or instructions given to Domus will not cause Domus to infringe any patent, registered design or trademark in the execution of the Customer's order and the Customer agrees to indemnify Domus against any action taken by a third party against Domus in respect of any such infringement.

### 16. Protection of Reputation

16.1 Any misuse, misrepresentation or any other action that negatively impacts Domus' brand (including but not limited to online sales and/or marketing campaigns) which is deemed to damage and/or tarnish the reputation of Domus' brand, may result in Domus mitigating that damage by refusing the Customer the right to continue to represent Domus.

#### 17. Default and Consequences of Default

- 17.1 Interest on overdue invoices may accrue daily from the date when payment becomes due, until the date of payment, at a rate of two and a half percent (2.5%) per calendar month (and at Domus' sole discretion such interest shall compound monthly at such a rate) after as well as before any judgment.
- 17.2 If the Customer owes Domus any money, the Customer shall indemnify Domus from and against all costs and disbursements incurred by Domus in recovering the debt (including, but not limited to, internal administration fees, legal costs on a solicitor and own client basis, Domus' contract default fee, and bank dishonour fees).
- 17.3 Further to any other rights or remedies Domus may have under this contract, if a Customer has made payment to Domus, and the transaction is subsequently reversed, the Customer shall be liable for the amount of the reversed transaction, in addition to any further costs incurred by Domus under this clause 17 where it can be proven that such reversal is found to be illegal, fraudulent or in contravention to the Customer's obligations under this agreement.
- 17.4 Without prejudice to Domus' other remedies at law Domus shall be entitled to cancel all or any part of any order of the Customer which remains unfulfilled and all amounts owing to Domus shall, whether or not due for payment, become immediately payable if:
  - (a). any money payable to Domus becomes overdue, or in Domus' opinion the Customer will be unable to make a payment when it falls due;
  - (b). the Customer has exceeded any applicable credit limit provided by Domus;
  - (c). the Customer becomes insolvent, convenes a meeting with its creditors or proposes or enters into an arrangement with creditors, or makes an assignment for the benefit of its creditors; or
  - (d). a receiver, manager, liquidator (provisional or otherwise) or similar person is appointed in respect of the Customer or any asset of the Customer.

### 18. Right of Supply and Cancellation

18.1 1Without prejudice to any other remedies Domus may have, if at any time the Customer is in breach of any obligation (including



# Terms and Conditions

those relating to payment) under these terms and conditions Domus may suspend or terminate the supply of Goods to the Customer.

Domus will not be liable to the Customer for any loss or damage the Customer suffers because Domus has exercised its rights under this clause.

- 18.2 Domus may cancel any contract to which these terms and conditions apply or cancel delivery of Goods at any time before the Goods are delivered by giving written notice to the Customer. On giving such notice Domus shall repay to the Customer any money paid by the Customer for the Goods. Domus shall not be liable for any loss or damage whatsoever arising from such cancellation.
- 18.3 In the event that the Customer cancels delivery of Goods the Customer shall be liable for any and all loss incurred (whether direct or indirect) by Domus as a direct result of the cancellation (including, but not limited to, any loss of profits).
- 18.4 Domus reserves the right to reject any cancellation of order for Goods (whether partially or wholly);
  - (a). Where the Goods supplied and/or to be supplied have been specially ordered by the Customer; or
  - (b). made to the Customer's specifications; or
  - (c). for non-stock items.

#### 19. Privacy Act 1988

- 19.1 The Customer agrees for Domus to obtain from a credit reporting body (CRB) a credit report containing personal credit information (e.g. name, address, D.O.B, occupation, previous credit applications, credit history) about the Customer in relation to credit provided by Domus.
- 19.2 The Customer agrees that Domus may exchange information about the Customer with those credit providers and with related body corporates for the following purposes:
  - (a). to assess an application by the Customer; and/or
  - (b). to notify other credit providers of a default by the Customer; and/or
  - (c). to exchange information with other credit providers as to the status of this credit account, where the Customer is in default with other credit providers; and/or
  - (d). to assess the creditworthiness of the Customer including the Customer's repayment history in the preceding two (2) years.
- 19.3 The Customer consents to Domus being given a consumer credit report to collect overdue payment on commercial credit.
- 19.4 The Customer agrees that personal credit information provided may be used and retained by Domus for the following purposes (and for other agreed purposes or required by):
  - (a). the provision of Goods; and/or
  - (b). analysing, verifying and/or checking the Customer's credit, payment and/or status in relation to the provision of Goods; and/or
  - (c). processing of any payment instructions, direct debit facilities and/or credit facilities requested by the Customer; and/or
  - (d). enabling the collection of amounts outstanding in relation to the Goods.
- 19.5 Domus may give information about the Customer to a CRB for the following purposes:
  - (a). to obtain a consumer credit report;
  - (b). allow the CRB to create or maintain a credit information file about the Customer including credit history.
- 19.6 The information given to the CRB may include:
  - (a). personal information as outlined in 19.1 above;
  - (b). name of the credit provider and that Domus is a current credit provider to the Customer;
  - (c). whether the credit provider is a licensee;
  - (d). type of consumer credit;
  - (e). details concerning the Customer's application for credit or commercial credit (e.g. date of commencement/termination of the credit account and the amount requested);
  - (f). advice of consumer credit defaults, overdue accounts, loan repayments or outstanding monies which are overdue by more than sixty (60) days and for which written notice for request of payment has been made and debt recovery action commenced or alternatively that the Customer no longer has any overdue accounts and Domus has been paid or otherwise discharged and all details surrounding that discharge (e.g. dates of payments);
  - (g). information that, in the opinion of Domus, the Customer has committed a serious credit infringement;
  - (h). advice that the amount of the Customer's overdue payment is equal to or more than one hundred and fifty dollars (\$150).
- 19.7 The Customer shall have the right to request (by e-mail) from Domus:
  - (a). a copy of the information about the Customer retained by Domus and the right to request that Domus correct any incorrect







information; and

- (b). that Domus does not disclose any personal information about the Customer for the purpose of direct marketing.
- 19.8 Domus will destroy personal information upon the Customer's request (by e-mail) or if it is no longer required unless it is required in order to fulfil the obligations of this agreement or is required to be maintained and/or stored in accordance with the law.
- 19.9 The Customer can make a privacy complaint by contacting Domus via e-mail. Domus will respond to that complaint within seven (7) days of receipt and will take all reasonable steps to make a decision as to the complaint within thirty (30) days of receipt of the complaint. In the event that the Customer is not satisfied with the resolution provided, the Customer can make a complaint to the Information Commissioner at www.oaic.gov.au.

### 20. Service of Notices

- 20.1 Any written notice given under this contract shall be deemed to have been given and received:
  - (a). by handing the notice to the other party, in person;
  - (b). by leaving it at the address of the other party as stated in this contract;
  - (c). by sending it by registered post to the address of the other party as stated in this contract;
  - (d). if sent by facsimile transmission to the fax number of the other party as stated in this contract (if any), on receipt of confirmation of the transmission:
  - (e). if sent by email to the other party's last known email address.
- 20.2 Any notice that is posted shall be deemed to have been served, unless the contrary is shown, at the time when by the ordinary course of post, the notice would have been delivered.

### 21. Building and Construction Industry Security of Payments Act 1999

- 21.1 At Domus' sole discretion, if there are any disputes or claims for unpaid Goods and/or Services then the provisions of the Building and Construction Industry Security of Payments Act 1999 may apply.
- 21.2 Nothing in this agreement is intended to have the effect of contracting out of any applicable provisions of the Building and Construction Industry Security of Payments Act 1999 of New South Wales, except to the extent permitted by the Act where applicable.

### 22. General

- 22.1 The failure by either party to enforce any provision of these terms and conditions shall not be treated as a waiver of that provision, nor shall it affect that party's right to subsequently enforce that provision. If any provision of these terms and conditions shall be invalid, void, illegal or unenforceable the validity, existence, legality and enforceability of the remaining provisions shall not be affected, prejudiced or impaired.
- 22.2 These terms and conditions and any contract to which they apply shall be governed by the laws of New South Wales in which Domus has its principal place of business, and are subject to the jurisdiction of the Bankstown Local Court, New South Wales.
- 22.3 Subject to clause 13, Domus shall be under no liability whatsoever to the Customer for any indirect and/or consequential loss and/or expense (including loss of profit) suffered by the Customer arising out of a breach by Domus of these terms and conditions (alternatively Domus' liability shall be limited to damages which under no circumstances shall exceed the Price of the Goods).
- 22.4 The Customer agrees that Domus may amend these terms and conditions by notifying the Customer in writing. These changes shall be deemed to take effect from the date on which the Customer accepts such changes, or otherwise at such time as the Customer makes a further request for Domus to provide Goods to the Customer.
- 22.5 Neither party shall be liable for any default due to any act of God, war, terrorism, strike, lock-out, industrial action, fire, flood, storm or other event beyond the reasonable control of either party.
- 22.6 Both parties warrant that they have the power to enter into this agreement and have obtained all necessary authorisations to allow them to do so, they are not insolvent and that this agreement creates binding and valid legal obligations on them.

